



PLUME 10 AC INSTALLATION INSTRUCTIONS




ATTENTION

- Please observe / follow the instructions methodically.
- Please ensure the units are handled with extreme care.
- Do not remove product from packaging prematurely. Only remove from packaging when ready for installation.
- Failure to observe installation instructions and handling will void warranty of the product.
- Fittings must be installed by a licensed electrician.
- Before installing, make sure the power supply is switched off or mains cable is disconnected.




■ PROFILE DIMENSIONS


Surface Mount Bracket

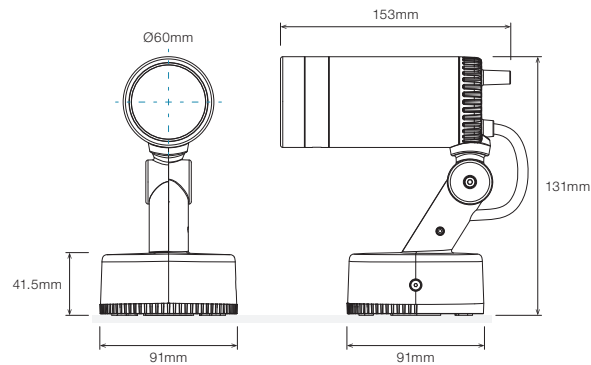


Surface Mount Bracket with Anti Glare Visor

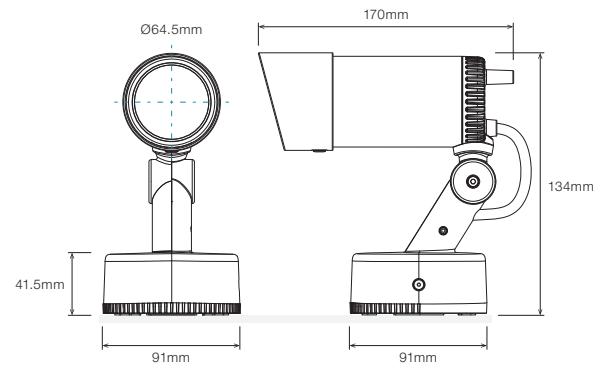


Surface Mount Bracket Rotation

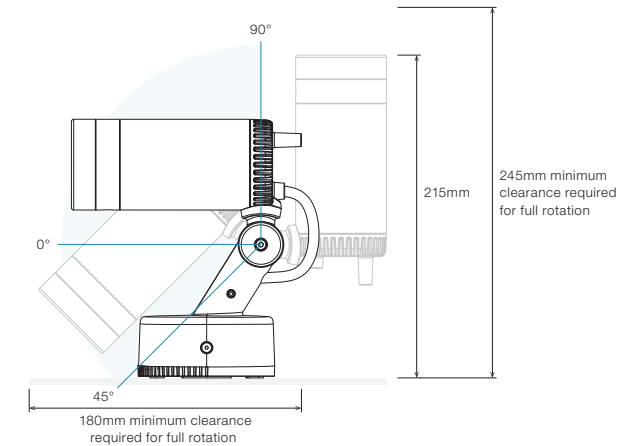


Ball Joint Mounting Bracket

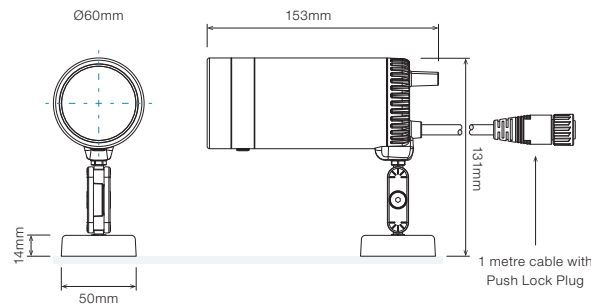

Ball Joint Mounting Bracket with Anti Glare Visor

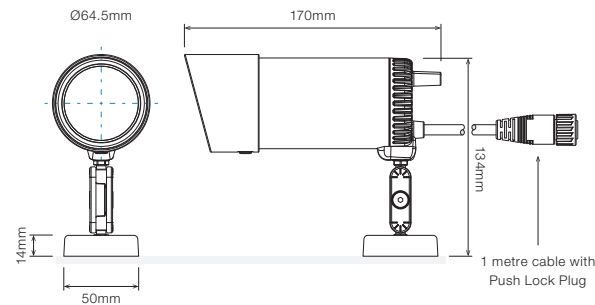


Ball Joint Mounting Bracket Rotation

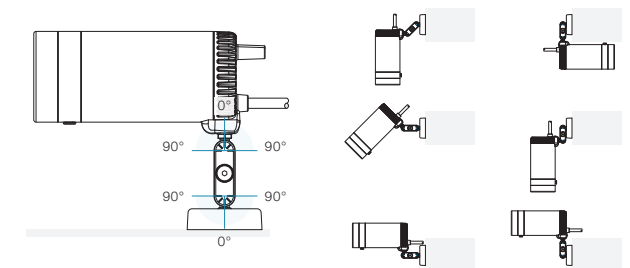



■ PACKAGING DIMENSIONS


With Surface Mount Bracket

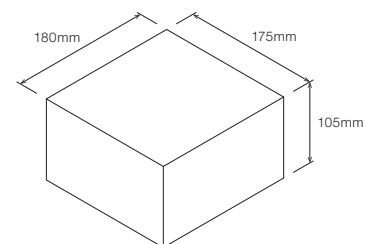

PACKAGED WEIGHT

1.3kg (contents can vary)

With Ball Joint Mounting Bracket



PACKAGED WEIGHT

1.3kg (contents can vary)

■ WIRING DIAGRAMS

CASAMBI INSTALLATION

Plume not recommended for Classic Casambi Networks



CASAMBI MESH NETWORK
Up to 249 Plumes in an evolution Casambi mesh network.



NEW DALI INSTALLATION

FROM DALI MASTER

DALI Bus

CBU-DCS



Up to 64 Plumes, limited by the DALI network.




Max total luminaires + input devices is the same for one DALI network (CBU-DCS not included)

EXPAND EXISTING DALI INSTALLATION

FROM DALI MASTER

DALI Bus



CBU-DCS



Up to 64 Plumes, minus the number of devices used in existing DALI installation.



Max total luminaires + input devices is the same for one DALI network (CBU-DCS not included)

DMX INSTALLATION

DMX as casambi scene trigger

FROM DMX CONTROLLER

DMX

SceneDMXcas



CASAMBI MESH NETWORK
Up to 249 Plumes in an evolution Casambi mesh network.




SceneDMXcas provides scene and intensity selection for up to 20 pre-defined Casambi scenes.

The DMX Start Address for each SceneDMXcas is user selectable.

SceneDMXcas can be configured with the Casambi app.

SceneDMXcas requires an external 12 – 24VDC Class 2 power supply.

Please refer to SceneDMXcas documentation for detailed instructions.

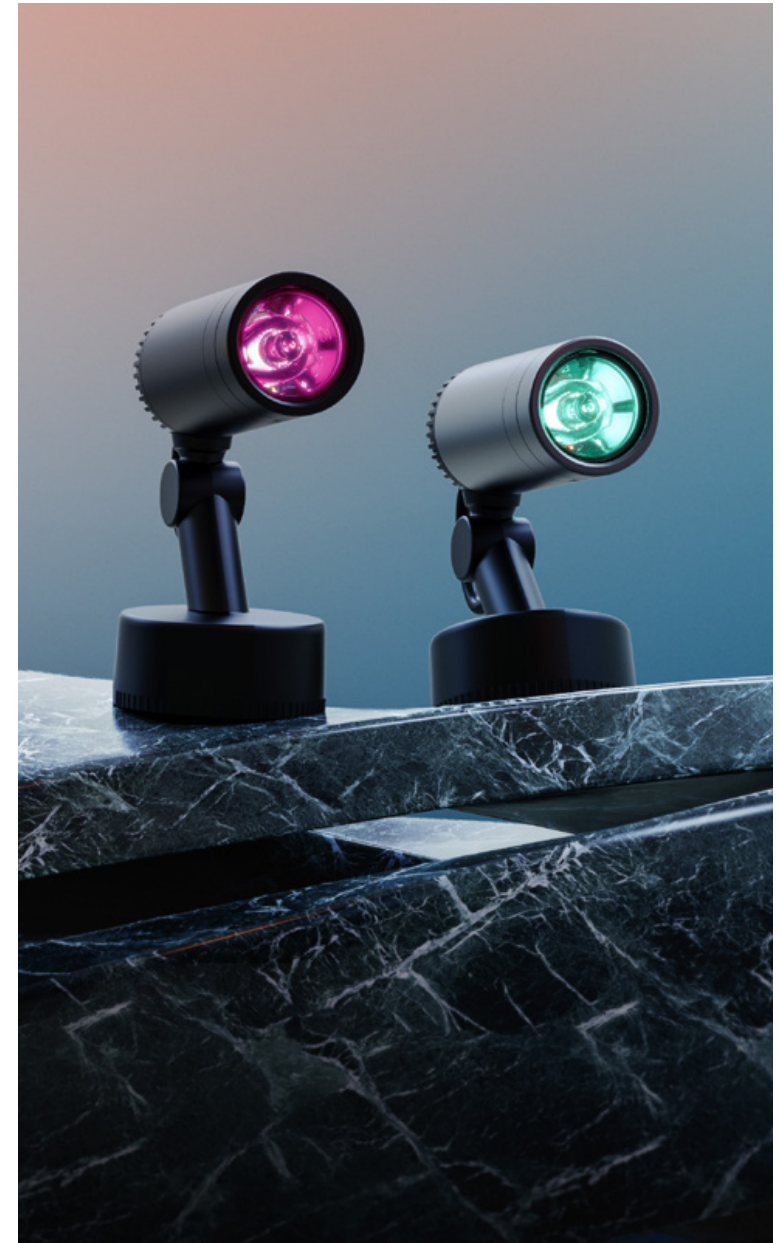




SPOT VISOR ACCESSORY (Sold Separately)

■ STEP 1


Align spot visor with Plume Spotlight.

Spot visor can be mounted at 0° or 90°.

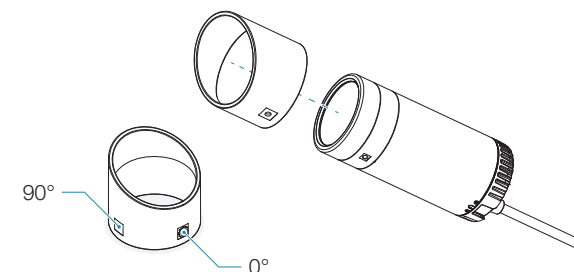


■ STEP 2

Slide spot visor over spotlight body until the end stop is in contact.

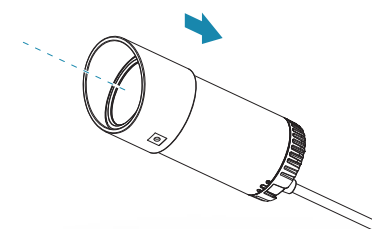


■ STEP 3

Insert screw with star washer and tighten with hex key (1.5Nm).



SURFACE MOUNTING BRACKET

▪ STEP 1




SCREW TYPE	THREAD SIZE
Metric Machine Screw	M5
Self Tapping Screw	10g (4.8mm)
SCREW HEAD WASHER Ø (MAX)	SCREW HEAD WASHER HEIGHT (MAX)
Ø11mm	No height restriction

SCREW LENGTH

Dependant on installation conditions. Requirement: centre of ball head must withstand a vertical load of 20N and torque of 2.5Nm

Mount the base securely to the surface using two appropriate screws (selected according to site conditions and material), positioned around the pre-installed wiring.

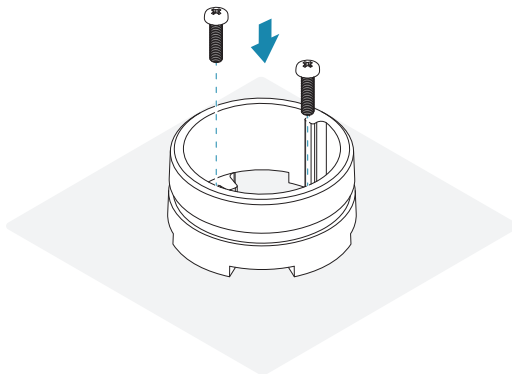


▪ STEP 2

Position the luminaire close to the mounted base and connect the wires using outdoor-rated connectors.


⚠ CAUTION

Ensure that cables are **not energised** during this step.

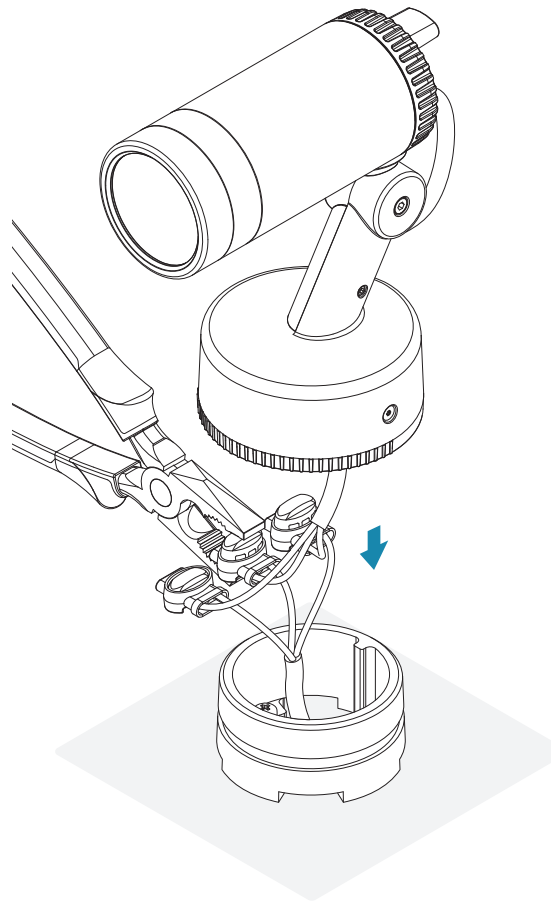


▪ STEP 3

Place the luminaire onto the base and slightly tighten the pan adjustment screw on the base.

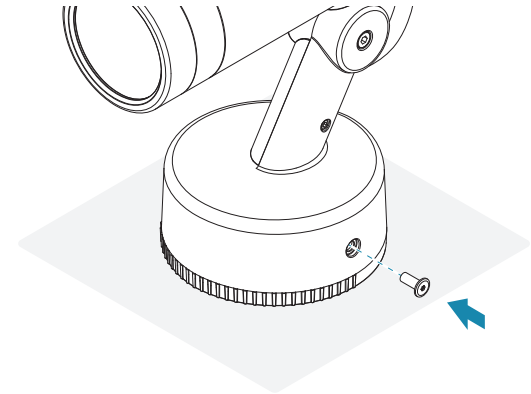

▪ STEP 4


Energise the circuit to power the luminaire.

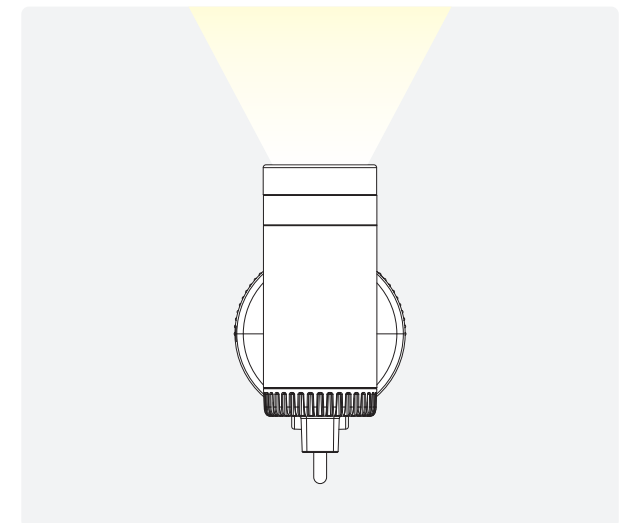

SURFACE MOUNTING BRACKET


▪ STEP 5

Adjust the pan angle to the desired position. Firmly hold the luminaire while tightening the pan adjustment screw on the base to 2 Nm

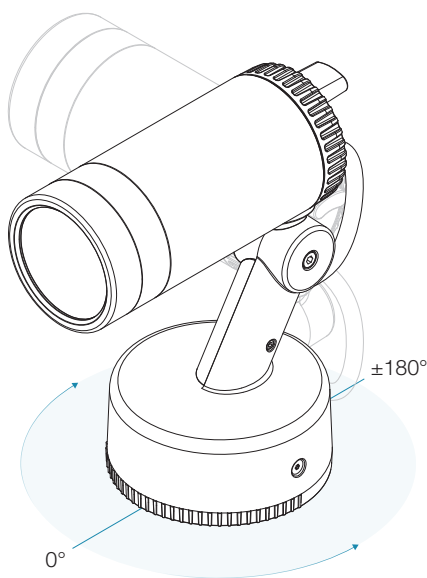

▪ STEP 6


Loosen the tilt adjustment screw, set the luminaire to the desired angle, then securely tighten the screw to 2.75 Nm.

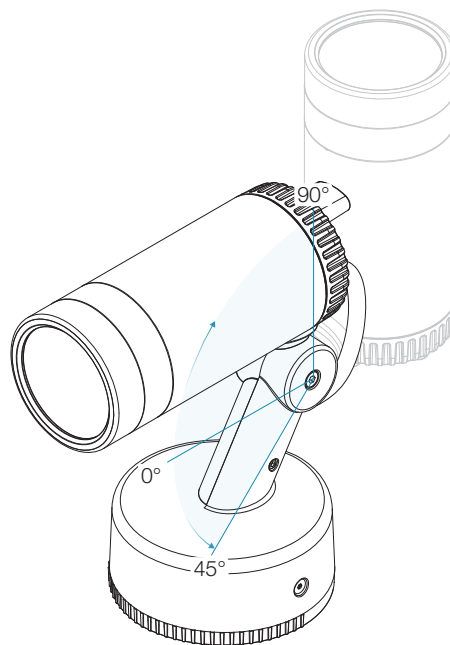

BALL JOINT MOUNTING BRACKET

STEP 1

Pick up base plate and select 2 suitable screws, refer to the table below for details.

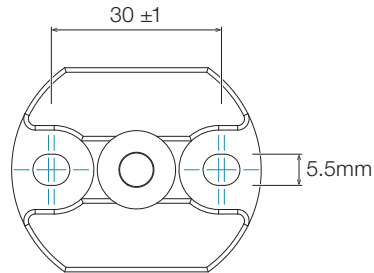


SCREW TYPE	THREAD SIZE
Metric Machine Screw	M5
Self Tapping Screw	10g (4.8mm)
SCREW HEAD WASHER Ø (MAX)	SCREW HEAD WASHER HEIGHT (MAX)
Ø13.5mm	6.5mm

LENGTH

Dependant on installation conditions. Requirement: centre of ball head must withstand a vertical load of 20N and torque of 2.5Nm


Locate and install base plate on wall/surface. Ensure screws are fully secured.

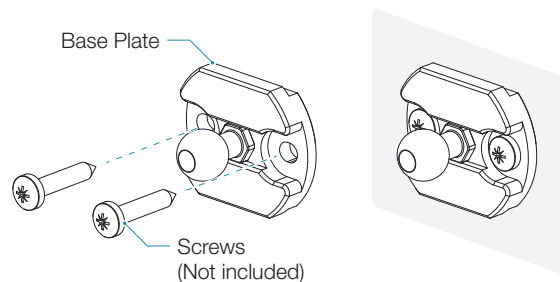

STEP 2


Pick up base cover and align with base plate. Slot must be parallel to base plate edge.

Snap base cover onto base plate as shown.

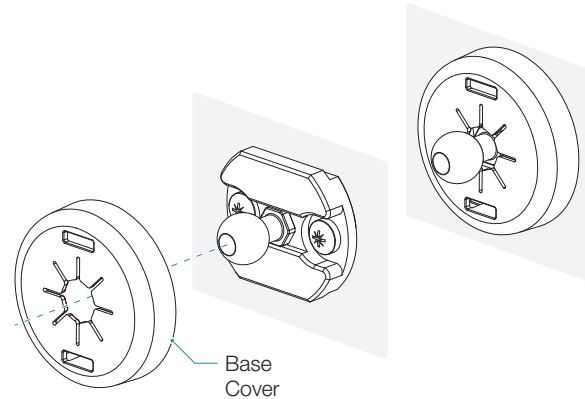


STEP 3

Loosen adjustment screw until bracket arms fit over the ball head stud.

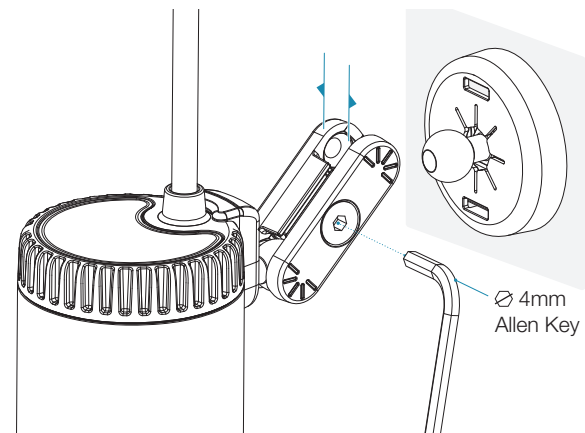

STEP 3

Move / rotate spotlight to desired position, hold tight and fasten adjustment screw (recommended torque 10Nm)

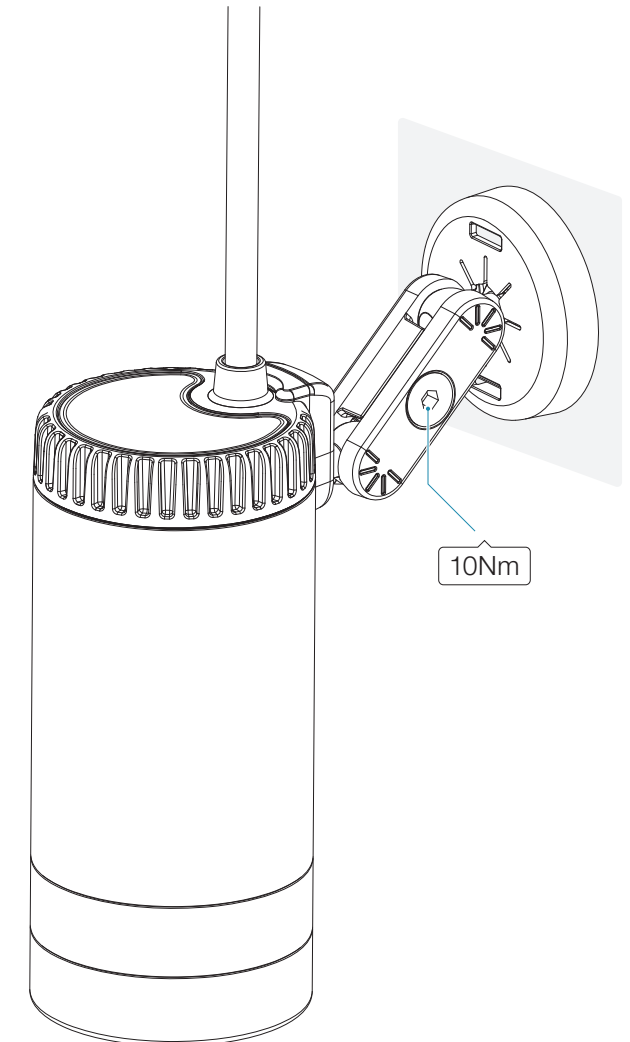

CASAMBI READY

Casambi is designed specifically for lighting and allows the user to easily control / automate a space using their phone, tablet or wireless switch.

For more information, please visit <https://casambi.com/>

For a range of switches please visit <https://casambi.com/ecosystem/> and explore the options.


For use with a tablet and smart phone, download the Casambi app and follow the easy to use instructions to pair with your luminaire.



How to use Casambi for the first time
<https://youtu.be/H5DRQ2vCQDw>



How to create a basic scene
https://youtu.be/RGXkXU_4r2A

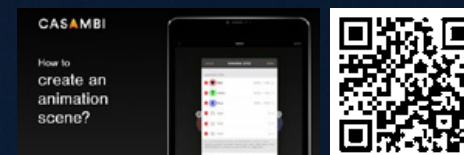

How to create an animation scene
<https://youtu.be/0RJ3Hvwvtpo>