





REINFORCED STRIP PROFILE INSTALLATION INSTRUCTIONS

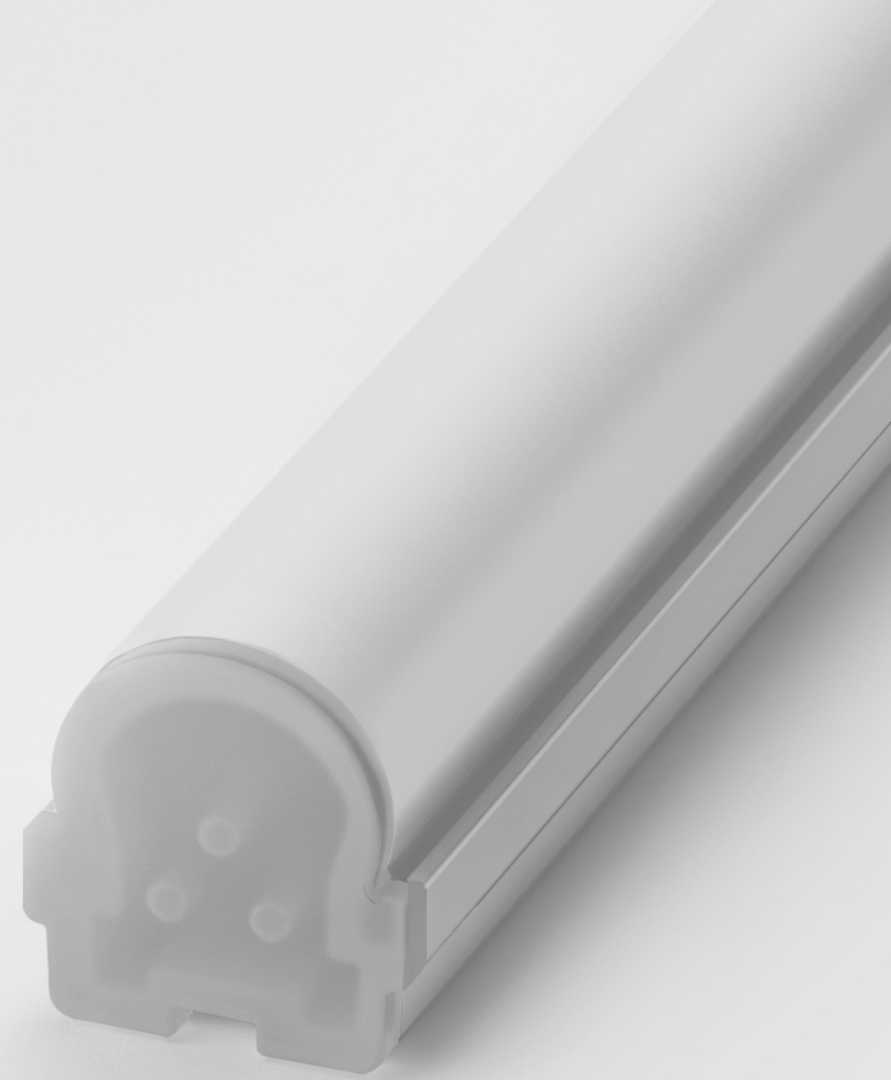

■ PROFILE DIMENSIONS

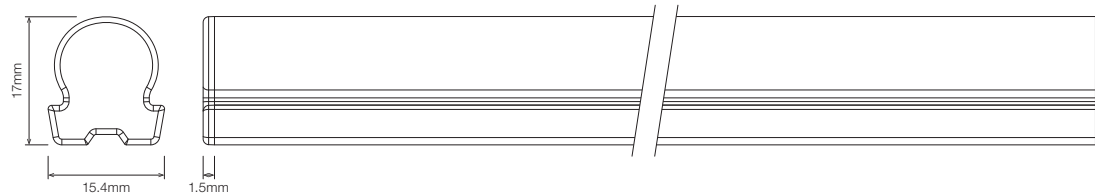




⚠ ATTENTION

- Please observe / follow the instructions methodically.
- Please ensure the units are handled with extreme care.
- Do not remove LED strips from packaging prematurely. Only remove from packaging when ready for installation.
- Failure to observe installation instructions and handling will void warranty of the product.


■ MOUNTING OPTIONS

With MC-STR-RD

Stainless Steel Clip for RD Profile




RECOMMENDED REBATE



■ WIRING OPTIONS


2 Wires (RB) – Indoor only



2 Pin (RB)



3 Wires (RWB) – Indoor only

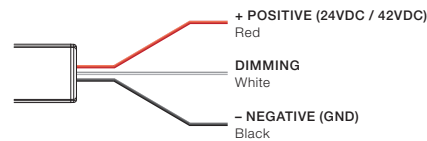



3 Pin (RWB)



4 Pin (WBGR)



4 Wires (WBGR) – Indoor only

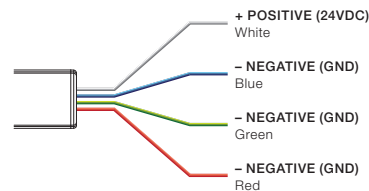

MC-STR-1513


A (Ø_mm) Screw outer diameter	3.5
B (Ø_mm) Screw head clearance	6.6
C (mm) Screw head pocket depth	2.0

STEP 1

Before you begin installation, ensure that you understand the fitting layout required as supplied lengths may vary.

Refer to the supplied cut sheet for length breakdowns.

** For fittings 1m or longer two installers are recommended.*

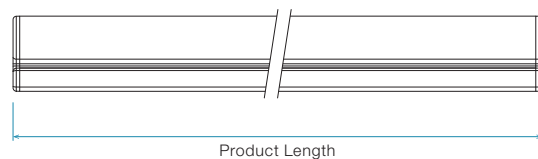


STAINLESS STEEL C-CLIP

STEP 2

Prepare mounting clips and screws (Ø3.5mm).


Secure mounting clips with screws on timber or metal surface ensuring that mounting clips are positioned screw side up with spacings of 500 – 600mm.

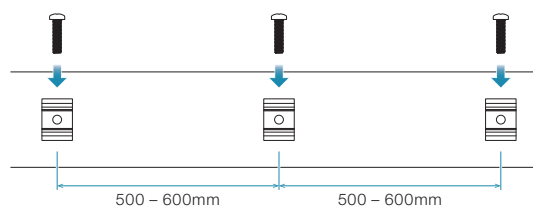

STEP 3

Tilt the strip on one edge and secure the other edge by latching LED strip to mounting clips.

Starting at one end push down the fitting until to ensure the luminaire is locked securely into place.

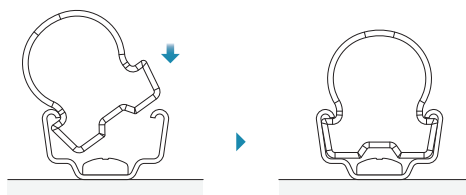

STEP 4

Wire the fitting to the correct power supply as advised on the cut sheet.

