



CP22 Luminaire w/ Standard Bracket

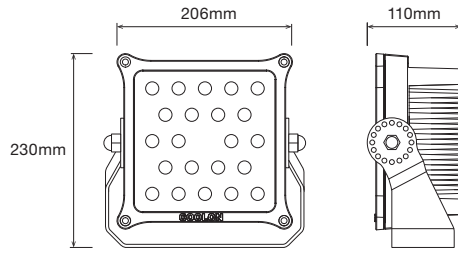


WIRING INSTRUCTIONS


CP22 Wiring

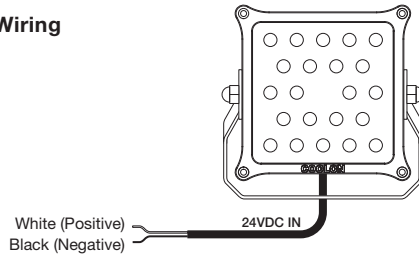

CP22 Wiring with Optional Dimming

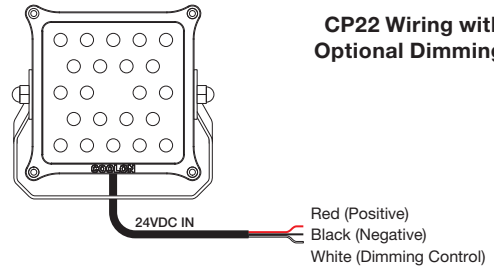

DIMMING

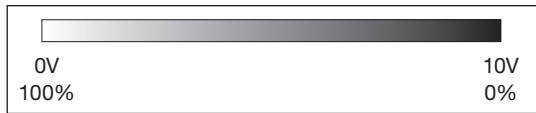


Dimming works on 0-10V (in respect to the GND) with:

0V = 100% light >8V = 0% light

Uniformity across the LED Strip cannot be guaranteed at brightness levels of less than 10%.

Dimming Connection Schematic


0 to 10V voltage control should be real "voltage" type, not "current sink" type.

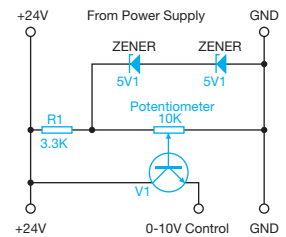

MOUNTING BRACKET INSTALLATION


Step 1

To adjust the mounting angle, unscrew bolt and loosen dome nut.

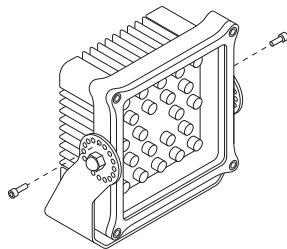

Step 2

Adjust the angle of the light fitting, and line up bracket holes to either the top or bottom mounting holes.

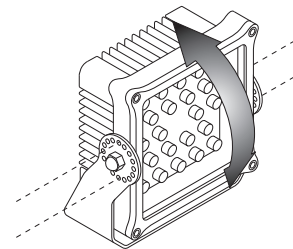

Step 3

Use Loctite® 222™ retaining compound (not included) to secure the dome nut. Screw in and tighten bolts on both sides.

