




ARIA X RGBW INSTALLATION INSTRUCTIONS



▪ PROFILE DIMENSIONS

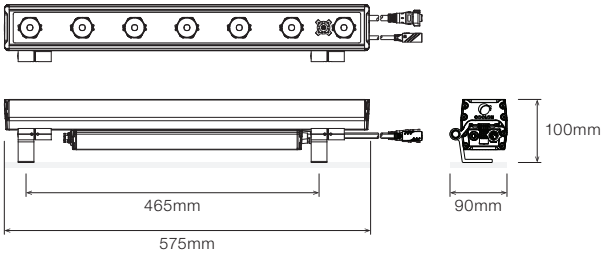


 ATTENTION

- Please observe / follow the instructions methodically.
- Please ensure the units are handled with extreme care.
- Do not remove product from packaging prematurely. Only remove from packaging when ready for installation.
- Failure to observe installation instructions and handling will void warranty of the product.
- Fittings must be installed by a licensed electrician.
- Before installing, make sure the power supply is switched off or mains cable is disconnected.


▪ INCLUDED

Box Contents



- 600mm Fitting
- Mounting Brackets (Integral)

+ Run Box




- Allen Key
- Cable Plastic Caps
- Cable Kits

CONTENTS	LxWxH DIMENSIONS	WEIGHT
1 x 06 Luminaire	582 x 191 x 121mm	4.2kg
2 x 06 Luminaire	582 x 191 x 121mm	8.4kg


■ INSTALLATION LIMITS @ 230VAC

Maximum 24 x 600mm fittings per individual run.

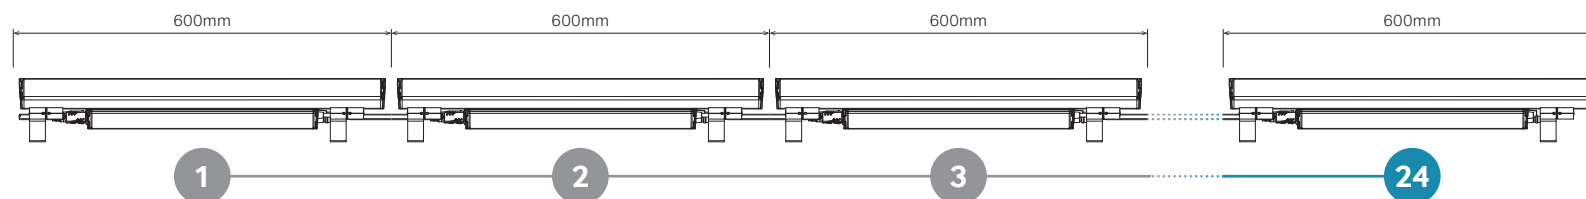


■ INSTALLATION LIMITS @ 120VAC


Maximum 12 x 600mm fittings per individual run.

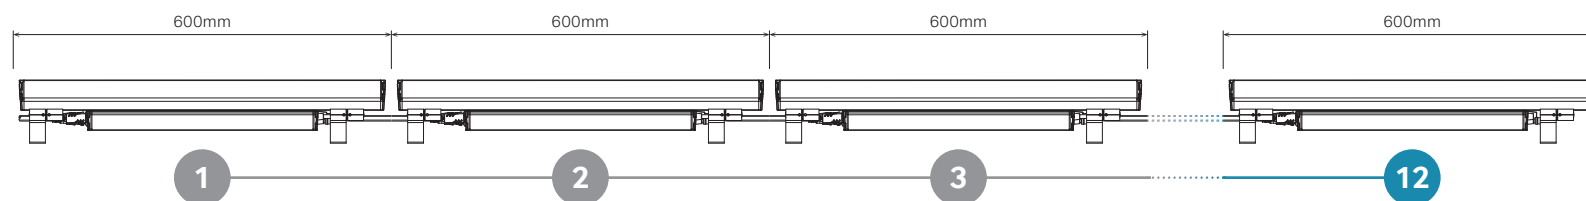

Minimum 2mm distance between the ends of fittings to keep consistent LED pitch.

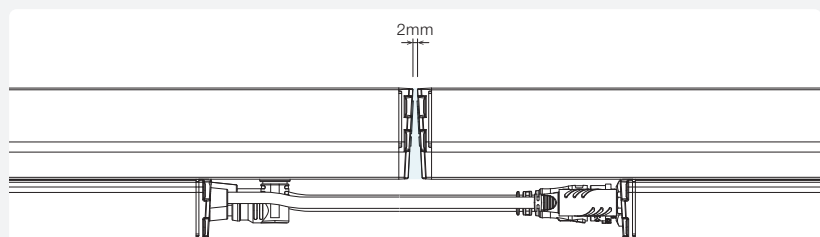

■ WIRING CONFIGURATION

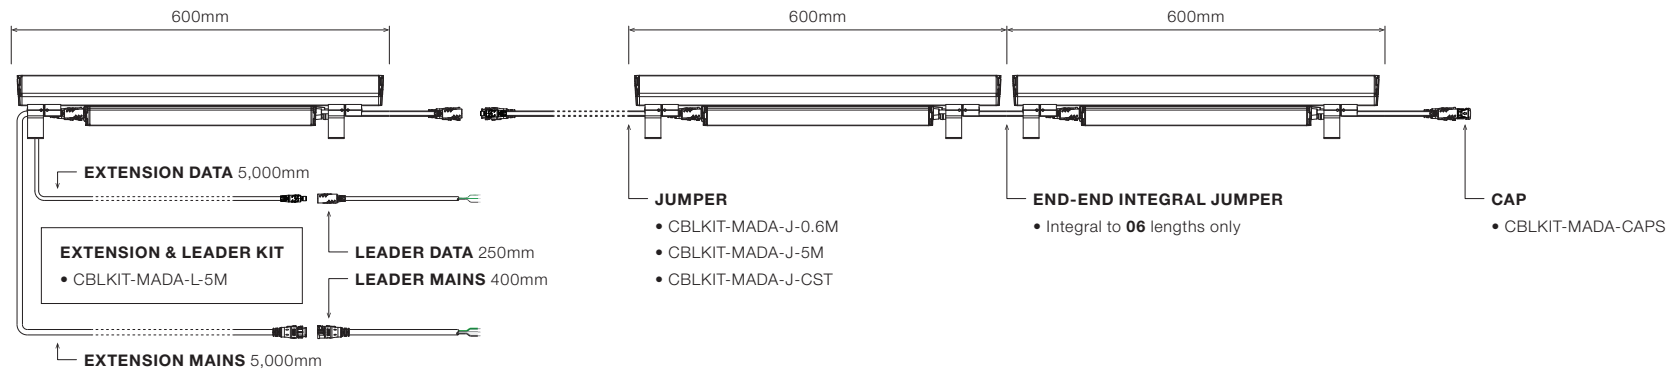

DATA Loom Wiring





MAINS Loom Wiring




CONNECTION

Before installation begins, please ensure that you understand the fitting layout as per luminaire schedule.

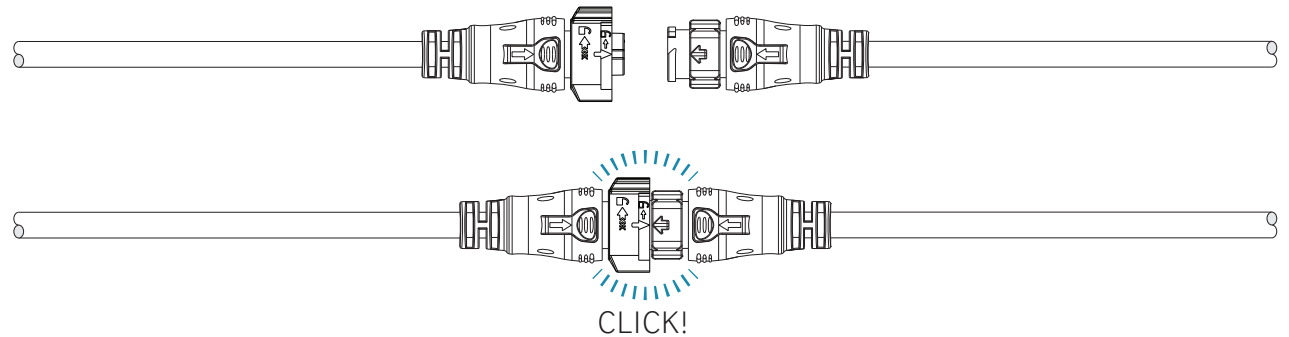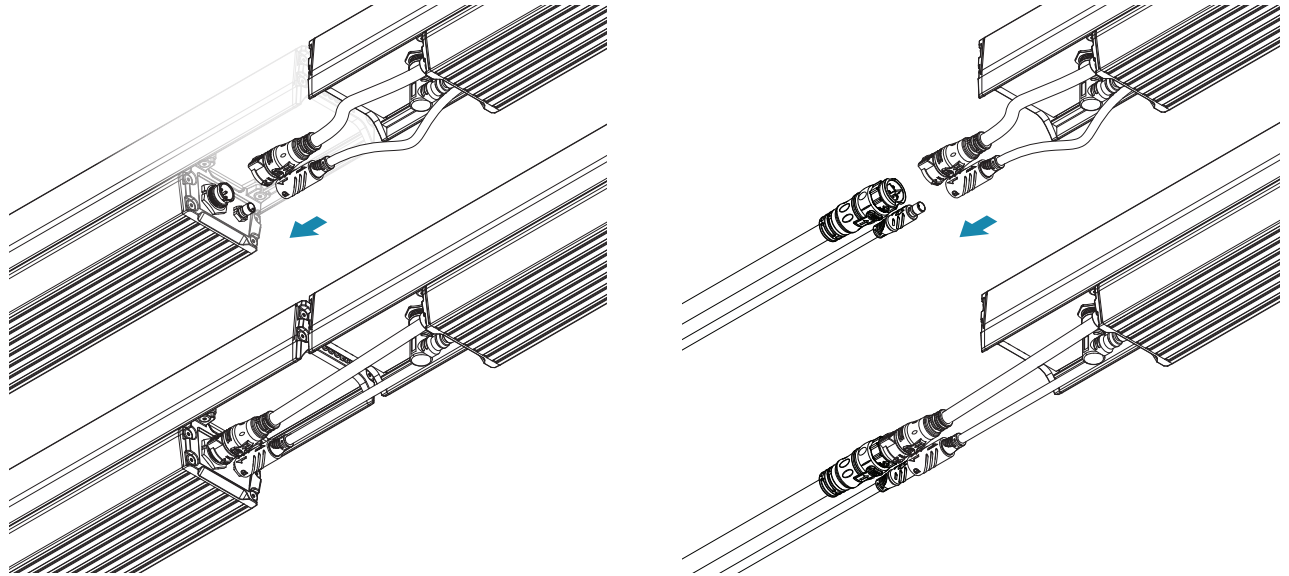





■ DIMENSIONS

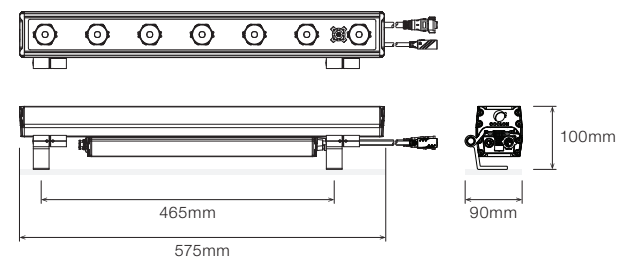

Bracket Bottom View




■ ROTATION WITH MOUNTING BRACKETS

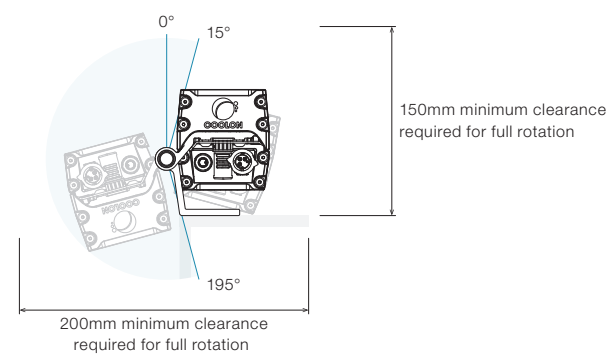




■ DIMENSIONS WITH GLARE SHIELD

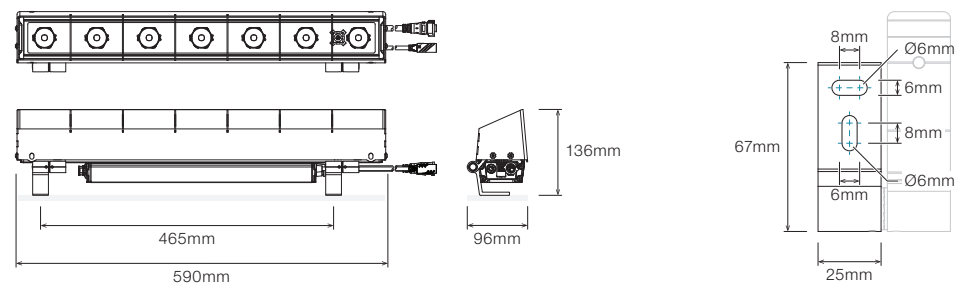


■ ROTATION WITH MOUNTING BRACKETS + GLARE SHIELD

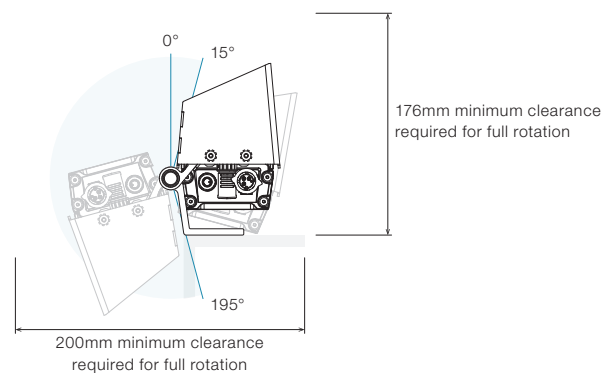

ADJUSTING THE MOUNTING BRACKET


▪ STEP 1

Loosen **Screws A** and **B** counter clockwise to allow for rotation of the luminaire.

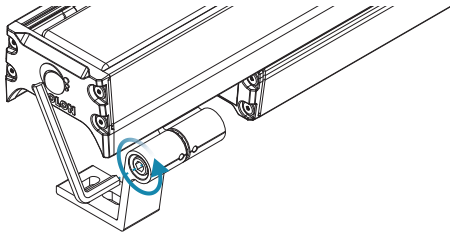



▪ STEP 2

Rotate the luminaire to your desired angle.

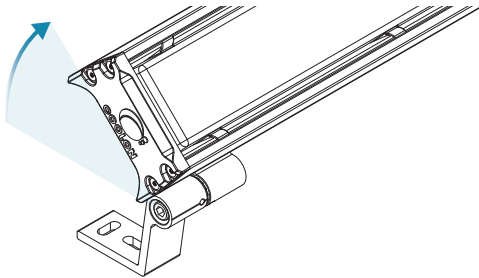

▪ STEP 3

Tighten **Screws A** and **B** clockwise to lock into position (4 – 5Nm).

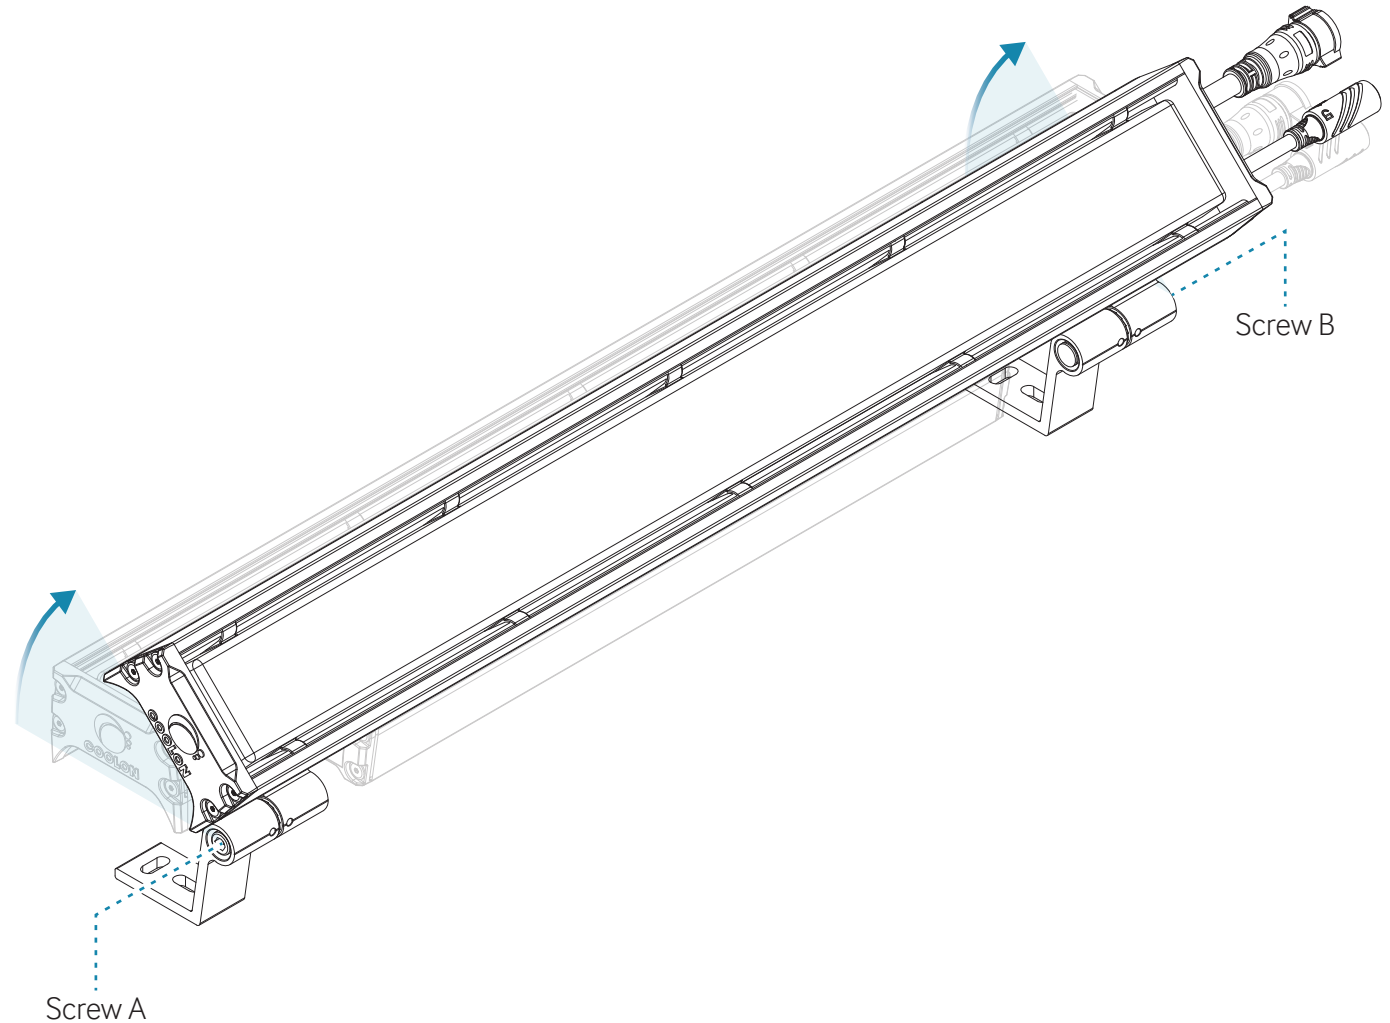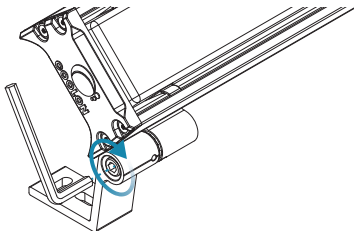

SAFETY LANYARD

Please utilize provisioned apertures if safety lanyards are required in the installation.

