

ATTENTION

Cable entry end must have minimum 40mm of free space away from the luminaire to ensure sufficient room for cable placement.


This product is designed for fixed/stationary installation, it is not designed to be used as a hand held work light.

Damage sustained by the units as a result of misuse is not covered by warranty.

INSTALLATION INSTRUCTIONS

PLG32 - 492/32 VAC Plug

Units supplied with PLG32 - 492/32 VAC Plug.

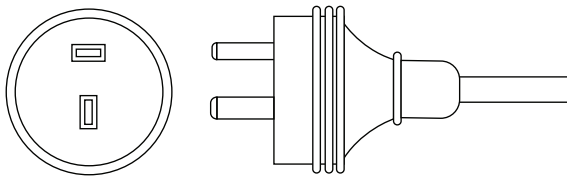

WR20S - 2 Core Cable Exposed

Units supplied with exposed 2 core cable.



Units are polarity insensitive. Units not equipped with a plug must have the wires connected securely.

Technical Specifications

Power Consumption	18 – 20W Typical
Nominal Voltage	24 VDC 30 VAC
Voltage Range	23 – 50 VDC 23 – 35 VAC 50Hz
Power Factor (AC supply)	0.5
Cable Diameter	7.5mm
Cable Length	3 Metres



Once the product has reached end of life, unit is to be disposed of in accordance to local e-waste laws or regulations. Do not dispose of these products as unsorted municipal waste: take them for recycling. For information on your nearest recycling point, check with your local waste authority.

IMPORTANT

Primary use: commercial and industrial applications.

- Read through this manual before installation
- Handle the product with care
- Class I products must be grounded
- The product must be installed by a suitably qualified person
- Do not stare at operating lamp, may be harmful to the eyes
- Turn OFF the power before installation and maintenance
- Make sure the product is securely installed
- The housing might become hot after operation
- Keep optical face clean

