

Electrical Characteristics

VOLTAGE IN
120 – 240VAC 50/60Hz

POWER
60W


IP/IK RATING
IP66 / IK09

OPERATING TEMP.
0 to +50°C

INSTALLATION INSTRUCTIONS



Step 1

Loosen the six captive screws on the bottom of the DLK2S to remove cover.

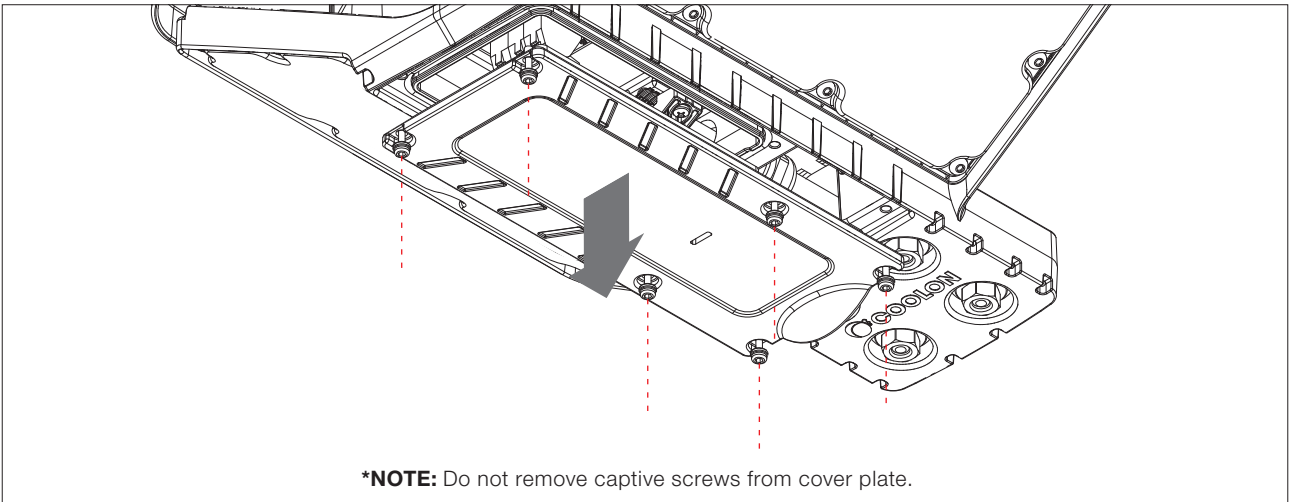

Step 2


Feed the cable through the cable gland while sliding the DLK2S to the spigot. Secure using U-Bolts with washers and M8 tube nuts.

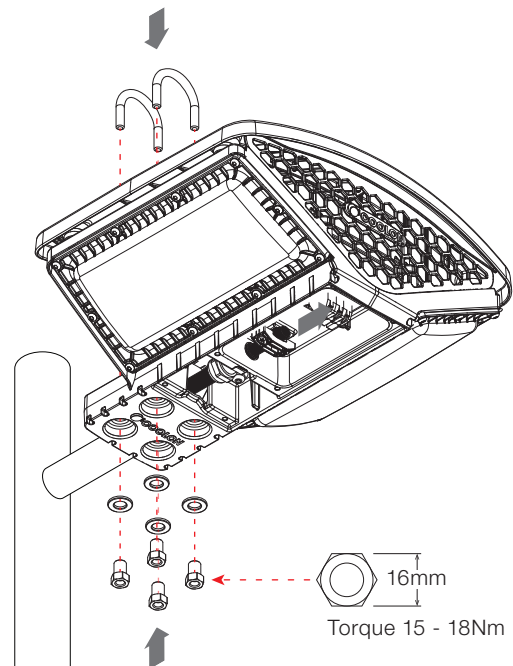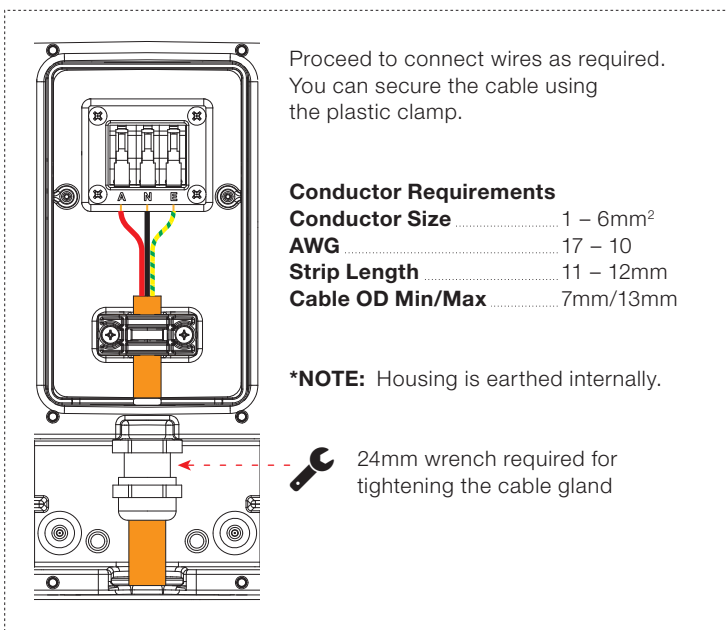

INSTALLATION INSTRUCTIONS (Continued)

Step 3


After mounting DLK2S to the spigot and wiring is complete, refit the bottom cover to finish installation.

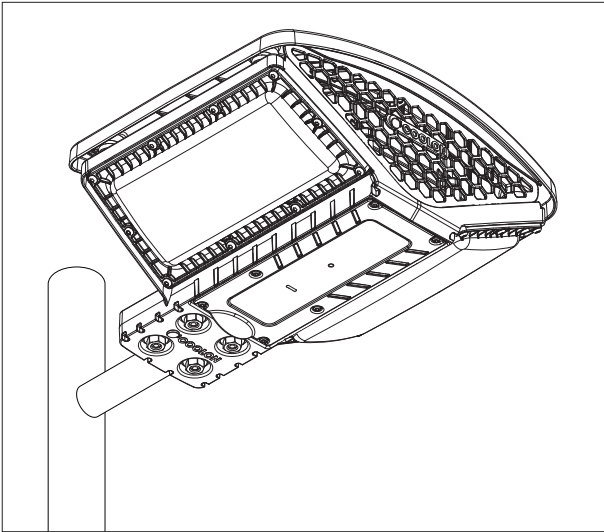

GLAND REPLACEMENT

The fitting is supplied with a stainless steel M20 gland to suit cable outer diameter 7 – 13mm. Cable glands are secured using Loctite 243.

The cable gland can be replaced by other types of glands which have a M20 x 1.5mm mounting thread. We recommend Loctite 277 for a permanent bond.

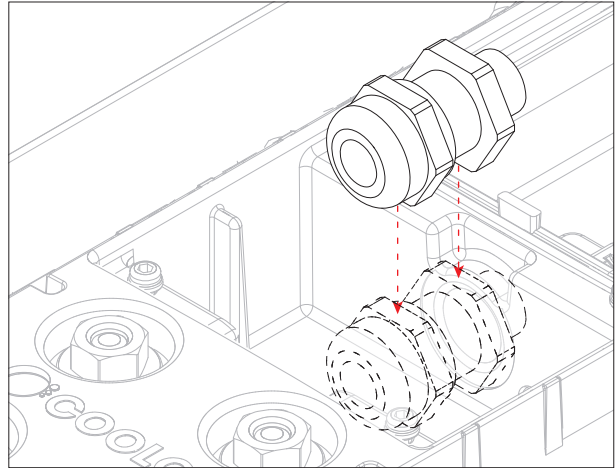

AUGMENTED FUNCTIONALITY

Remote Dimming

10 to 100% remote dimming function available as Cloud feature.

BitCortex

A web based platform to manage and control smart wireless devices. Accessible anywhere through an internet connected browser. To learn more about Brilliant Connected lights please visit www.bitcortex.net or scan the QR code.

IMPORTANT

Primary use: conveyor light for commercial and industrial applications. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.

- Read through this manual before installation
- Handle the product with care
- The product must be grounded
- The product must be installed by a suitably qualified person
- Turn OFF the power before installation and maintenance
- Make sure the product is securely installed
- The housing might become hot after operation
- Keep optical face clean

