



VOLTAGE

24V

CURRENT

6.30A

POWER


151W

Mean Well 150W Single Output Switching Power Supply

FEATURES

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1-10VDC or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 7 years warranty

DIMENSIONS

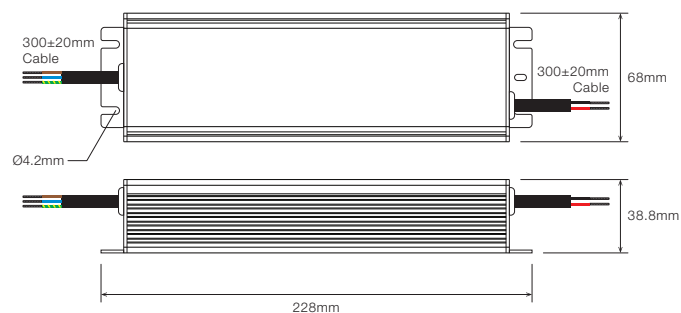

■ TECHNICAL SPECIFICATIONS

Model		HLG-150H-12	HLG-150H-15	HLG-150H-20	HLG-150H-24	HLG-150H-30	HLG-185H-36	HLG-150H-42	HLG-150H-48	HLG-150H-54
Output	DC Voltage	12V	15V	20V	24V	30V	36V	42V	48V	54V
	Constant Current Region ⁴	6 – 12V	7.5 – 15V	10 – 20V	12 – 24V	15 – 30V	18 – 36V	21 – 42V	24 – 48V	27 – 54V
	Rated Current	12.5A	10A	7.5A	6.3A	5A	4.2A	3.6A	3.2A	2.8A
	Rated Power	150W	150W	150W	151.2W	150W	151.2W	151.2W	153.6W	151.2W
	Ripple & Noise (max.) ²	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p
	Voltage Adj. Range ⁵	10.8 – 13.5V	13.5 – 17V	17 – 22V	22 – 27V	27 – 33V	33 – 40V	38 – 46V	43 – 53V	49 – 58V
	Current Adj. Range	Can be adjusted by internal potentiometer A type only								
		7.5 – 12.5A	6 – 10A	4.5 – 7.5A	3.8 – 6.3A	3 – 5A	2.5 – 4.2A	2.16 – 3.6A	1.92 – 3.2A	1.68 – 2.8A
	Voltage Tolerance ³	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Load Regulation	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Setup, Rise Time ⁸	1000ms, 50ms/115VAC		500ms, 50ms/230VAC at full load		B type 1000ms, 200ms/115VAC		500ms, 200ms/230VAC at 95% load			
Hold Up Time	16ms at full load		230VAC / 115VAC							
Input	Voltage Range	90 – 305VAC		127 – 431VDC						
	Frequency Range	47 – 63Hz								
	Power Factor	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)								
	Total Harmonic Distortion	THD< 20% when output loading ≥ 60% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input								
	Efficiency (Typ.)	91.5%	92%	93%	93%	93.5%	93.5%	94%	94%	94%
	AC Current (Typ.)	1.7A / 115VAC		0.75A / 230VAC		0.7A / 277VAC				
	Inrush Current (Typ.)	COLD START 65A (twidh=425μs measured at 50% Ipeak) at 230VAC								
Leakage Current	<0.75mA / 277VAC									
Protection	Over Current ⁴	95 – 108% Protection type : Constant current limiting, recovers automatically after fault condition is removed								
	Short Circuit	Constant current limiting, recovers automatically after fault condition is removed								
	Over Voltage	14 – 17V	18 – 21V	23 – 27V	28 – 34V	34 – 38V	41 – 46V	47 – 53V	54 – 63V	59 – 65V
	Over Temperature	Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery								
	Over Temperature	Shut down o/p voltage, recovers automatically after temperature goes down								
Environment	Working Temp.	-40 – +70°C (Refer to "Derating Curve")								
	Working Humidity	20 – 95% RH non-condensing								
	Storage Temp., Humidity	-40 – +80°C, 10 – 95% RH								
	Temp. Coefficient	±0.03%/°C (0 – 50°C)								
	Vibration	10 – 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
Safety & EMC	Safety Standards ⁷	UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved ; design refer to UL60950-1, TUV EN60950-1								
	Withstand Voltage	I/P-O/P:3.75KVAC		I/P-FG:2KVAC		O/P-FG:1.5KVAC				
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								
	EMC Emission	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥60% load) ; EN61000-3-3								
	EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A								
Others	MTBF	192.2Khrs min.		MIL-HDBK-217F (25°C)						
	Dimension (LxWxH)	228 x 68 x 38.8mm								
	Packing	1.15Kg; 12pcs / 14.8Kg / 0.74cu.ft								

¹ All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

² Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.

³ Tolerance : includes set up tolerance, line regulation and load regulation.

⁴ Please refer to "DRIVING METHODS OF LED MODULE" in Meanwell's specification sheet

⁵ Derating may be needed under low input voltages. Please check the static characteristics in Meanwell's specification sheet for more details.

⁶ A type only.

⁷ Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.

⁸ Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.

⁹ The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

¹⁰ To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.

■ ORDERING EXAMPLE

PWR-HLG150W-24

IP67 rated. Cable for I/O connection

PWR-HLG150W-24-A

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

PWR-HLG150W-24-B

B: IP67 rated. Constant current level adjustable through output cable with 1–10VDC or 10V PWM signal or resistance.