

Wall Mounting Bracket to a Spigot

ORDERING EXAMPLE

ACC - WMB - SPIGOT - SS

WMB
Wall mount
bracket

SPIGOT
34.5mm OD
mounting
spigot

SS
Stainless
Steel 304

GAL
Galvanized
steel

Description

The Wall Mounting Bracket to a Spigot allows spigot mounted lights to be easily installed on any flat surface.

Suitable for

DLK, DLK2, EWL

Mounting

4 x M6 Bolts (not included)

Weight


0.75kg

Spigot size

34.5mm



DIMENSIONS

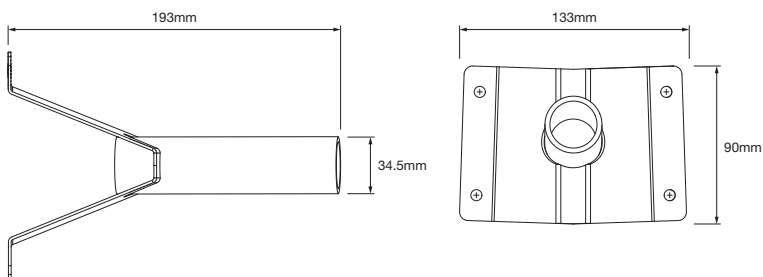

Pole Top Adapter to a Spigot

ORDERING EXAMPLE

ACC - PTA - NB40/50 - SPIGOT - GAL

PTA
Pole top
adaptor

NB40/50
To fit DN40
and DN50
pipe

SPIGOT
34.5mm OD
mounting
spigot

GAL
Galvanized
steel

SS316
Stainless
Steel 316

Description

The smooth bend of the Pole Top Adapter to a Spigot allows stiff reinforced power cable to be easily pushed through. For greater versatility, the adapter can fit both NB40 and NB50 industrial poles.

Suitable for

DLK, DLK2, EWL

Mounting

NB40 or NB50 Pole top

Weight


3.8kg

Spigot size

34.5mm



DIMENSIONS

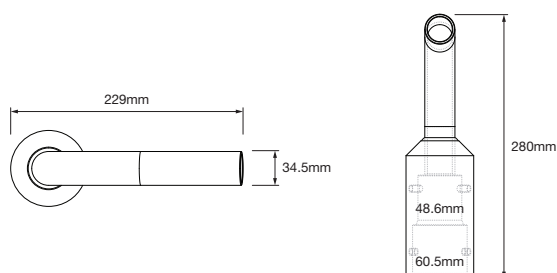

U-Bolt Pole Mount

ORDERING EXAMPLE

ACC	-	PMB	-	NB40	-	BOLT	-	SS
		PMB Pole Mount Bracket		NB40 To fit DN40 pipe NB50 To fit DN50 pipe		BOLT M8x1.5 mounting bolt		SS Stainless Steel 304 GAL Galvanized mild steel

Description

The U-Bolt Pole Mount allows a variety of surface mounted products to be installed on industrial poles, pipes and handrails of various diameters.

Suitable for

Warden, Low Bay (LB2-SSH)

Mounting


U-Bolt

Weight

0.3kg



DIMENSIONS

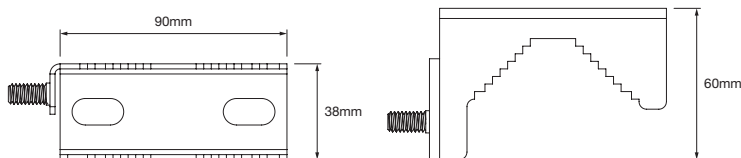

U-Bolt Pole Mounting Plate

ORDERING EXAMPLE

ACC	-	PMB	-	NB40	-	PL100	-	GAL
		PMB Pole Mount Bracket		NB25 To fit DN25 pipe NB40 To fit DN40 pipe NB50 To fit DN50 pipe NB65 To fit DN65 pipe NB80 To fit DN80 pipe 50X50 To fit 50x50 RHS pipe		PL100 Enclosure Mounting Plate		GAL Galvanized mild steel

Description

The U-Bolt pole mounting kit is specifically designed for mounting products using AL036 enclosure on a variety of poles that are widely used in the industry.

Suitable for


EMP-036AL, PWR-CLN-036AL, PWR-CLN-281AL, PWR-CLN-381AL

Mounting


U-Bolt

Weight

1.6kg

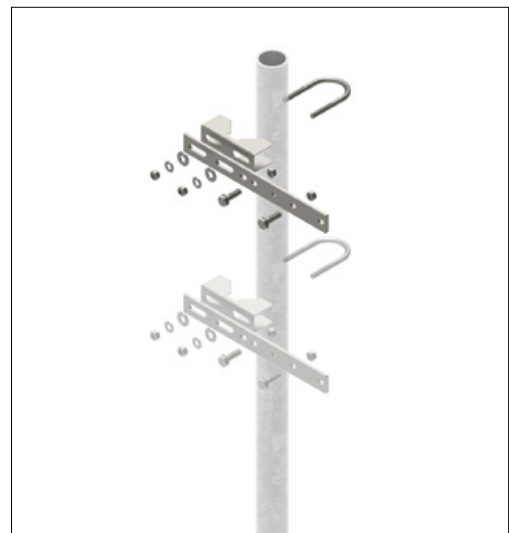

DIMENSIONS

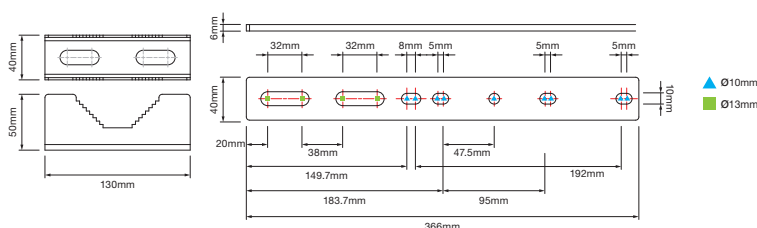

T-Bolt Swivel Bracket

ORDERING EXAMPLE

ACC - SWB - TBOLT - SS316

SWB
Swivel
Bracket

TBOLT
M10 T-Bolt

SS316
Stainless
Steel 316

Description

The T-Bolt Swivel Bracket allows the IBYS-160 and AZIZ LIGHT™ high bay luminaires to be installed on angled surfaces between 0 and 45°.

Suitable for



AZIZ LIGHT™, IBYS High Bay

Mounting

2 x M8 Bolts (not included)


Weight

0.4kg

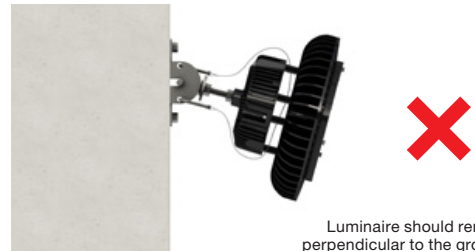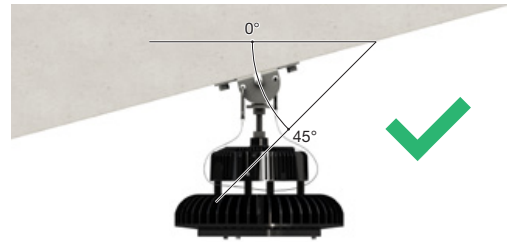

Luminaire should remain perpendicular to the ground

DIMENSIONS

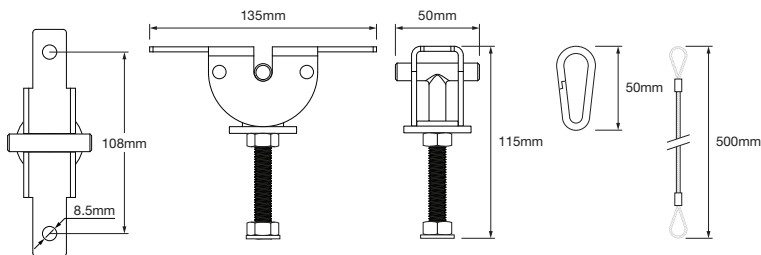

XBLADE™ Beam Coupling Plate

ORDERING EXAMPLE

ACC - BCP - BC400 - PL330 - MS

BCP
Beam
Coupling
Plate

BC400
To fit 400mm
wide I-beam
flange

PL330
Plate to suit
XBLADE-960
bracket

MS
Mild Steel

Description

The Beam Coupling Plate is used to provide structural integrity along the length of the XBLADE™ 960 mounting bracket in applications where the entire bracket cannot be fastened to a surface.

Suitable for

XBLADE™

Mounting

8x M16 Bolts and Nuts
(not included)

Weight

29.72kg

Configuration A

Achievable Angles:
0° from horizontal
25° from horizontal
35° from horizontal
45° from horizontal
60° from horizontal





Configuration B

Achievable Angles:
0° from horizontal
20° from horizontal
35° from horizontal
45° from horizontal
60° from horizontal



DIMENSIONS

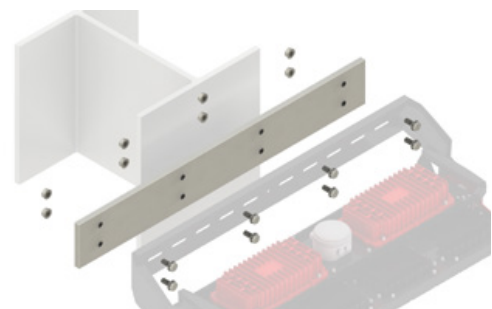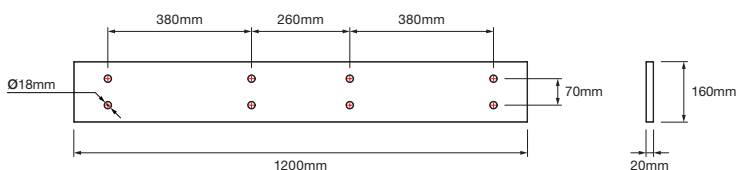


Enclosure and Luminaire Wall Mounting Bracket

ORDERING EXAMPLE

ACC	-	WMB	-	BOLT	-	036AL	-	SS
		WMB Wall Mounting Bracket		BOLT M10 T-Bolt		036AL Power Supply Aluminium Enclosure		SS Stainless Steel 304
Description		Suitable for Coupling the Coolon 036AL power supply enclosure, CP9 and CP12 luminaire						
Enclosure and luminaire wall mount bracket.		Mounting 2 x M8 Bolts (not included)						
		Weight 1.2kg						



DIMENSIONS

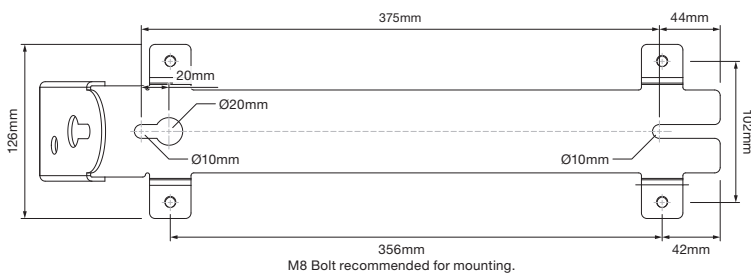

U-Bolt Pole Mounting Clamp Kit



ORDERING EXAMPLE

ACC	-	PMC	-	NB40	-	GAL
		PMC Pole Mount Clamp		NB25 To fit DN25 pipe NB40 To fit DN40 pipe NB50 To fit DN50 pipe NB65 To fit DN65 pipe NB80 To fit DN80 pipe		GAL Galvanized mild steel
Description		Suitable for Butch LED Floodlight, plate/bracket attachment				
The U-Bolt Pole Mounting Clamp Kit is specifically designed for mounting products with a flat mounting surface on a variety of circular poles that are widely used in the industry.		Mounting U-Bolt				
		Weight 0.3kg				

- NB40
- NB50
- NB65
- NB80



DIMENSIONS

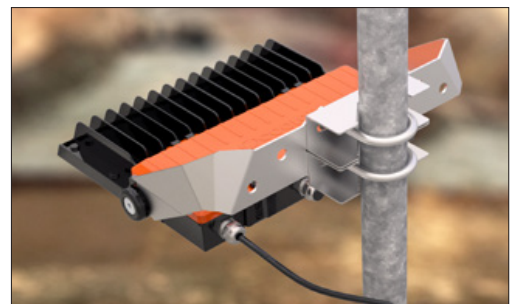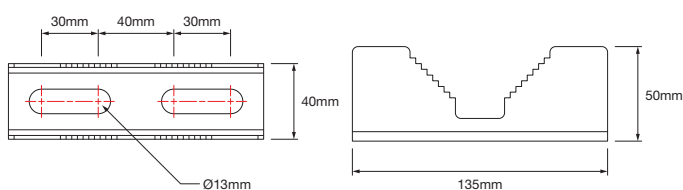


Bulkhead Pole Mounting Bracket

ORDERING EXAMPLE

ACC	-	PMB	-	NB40	-	BH	-	SS
		PMB Pole Mount Bracket		NB25 to fit DN25 pipe NB40 to fit DN40 pipe NB50 to fit DN50 pipe NB65 to fit DN65 pipe		BH Coolon Bulkhead footprint		SS Stainless Steel 304
Description		The Bulkhead Pole Mounting Bracket is specifically designed for mounting Bulkhead luminaire on a variety of circular poles that are widely used in the industry.						
		Suitable for		Bulkhead LED Light plate/bracket attachment				
		Mounting		U-Bolt				
		Weight		1.1kg				




DIMENSIONS

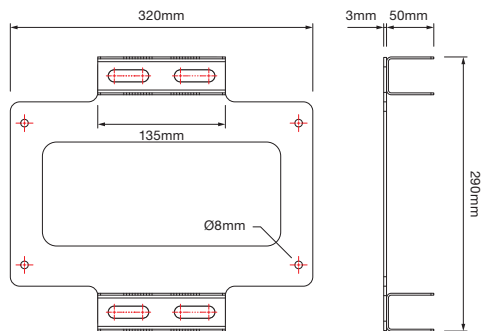


Versalux EBH Adapter Plate

ORDERING EXAMPLE

ACC	-	AP	-	VEBH	-	BH	-	SS
		AP Adapter Plate		VEBH To fit Versalux EBH		BH Plate to suit Bulkhead		SS 3mm Stainless Steel 304 #4
Description		Adaptor Plate, to match Versalux EBH and Coolon Bulkhead, 3mm SS 304 #4.						
		Suitable for		Bulkhead				
		Mounting		Recommened M10 x 35mm (minimum) Bolts (not included)				
		Weight		1.2kg				

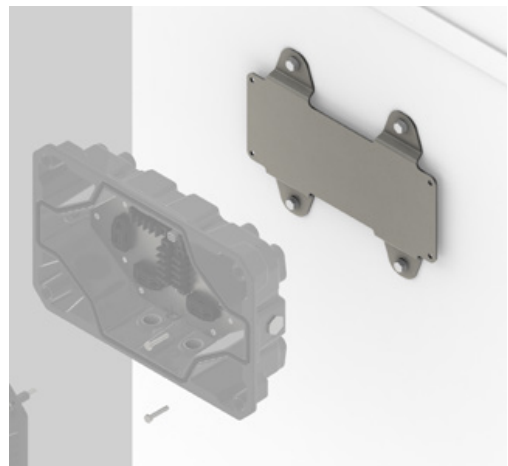

DIMENSIONS

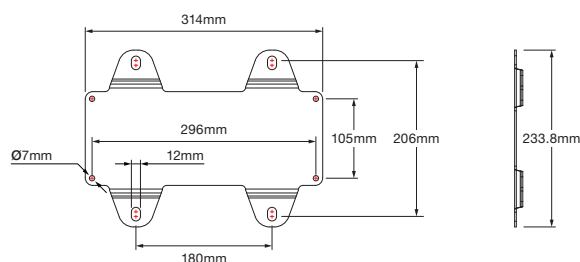

U-Bolt Spigot Mount Bracket with CCG H-Junction Box, Galvanised


ORDERING EXAMPLE

ACC	-	UBT	-	SMB	-	CCG - H - BOX	-	GAL
		UBT U-Bolt		SMB Spigot Mount Bracket		CCG H BOX CCG H-Junction Box		GAL Galvanized steel

Description	Suitable for	Spigot mount luminaires / fittings
Allows for convenient mains in-out connection at the luminaire without modifying the luminaire.	Mounting	Spigot Mount Bracket
	Weight	2.5kg



DIMENSIONS

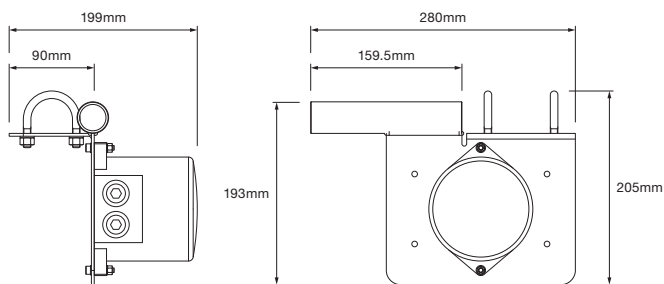


TNR External Accessory Mounted on a Stainless Steel Plate


ORDERING EXAMPLE

ACC	-	TNR	-	CCG - H - BOX	-	PLATE	-	SS
		TNR Tunnel Ray		CCG H BOX CCG H-Junction Box				SS Stainless Steel 304

Description	Suitable for	Tunnel Ray (TNR)
Allows for convenient mains in-out connection at the luminaire without modifying the luminaire.	Mounting	TNR bracket mount
	Weight	2kg

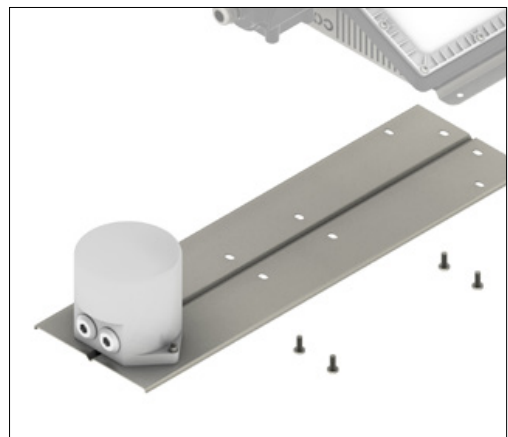


DIMENSIONS

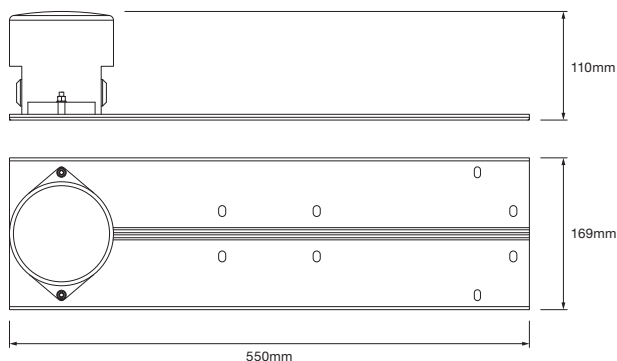

Coolon 7 Channel DIN Rail Capacitor Bank

ORDERING EXAMPLE

CL	-	7DR	-	1000	-	24
		7DR 7 Channel DIN Rail		1000 1000µF		24 24V
Description			Suitable for			CP56
Eliminate spikes / transients when connecting multiple luminaires to a single DC supply line.			Mounting			DIN Rail (EN50022)
			Weight			0.2kg

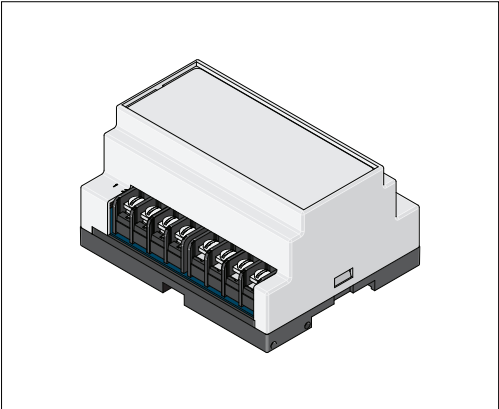

DIMENSIONS

