


IBYS LUMINAIRE

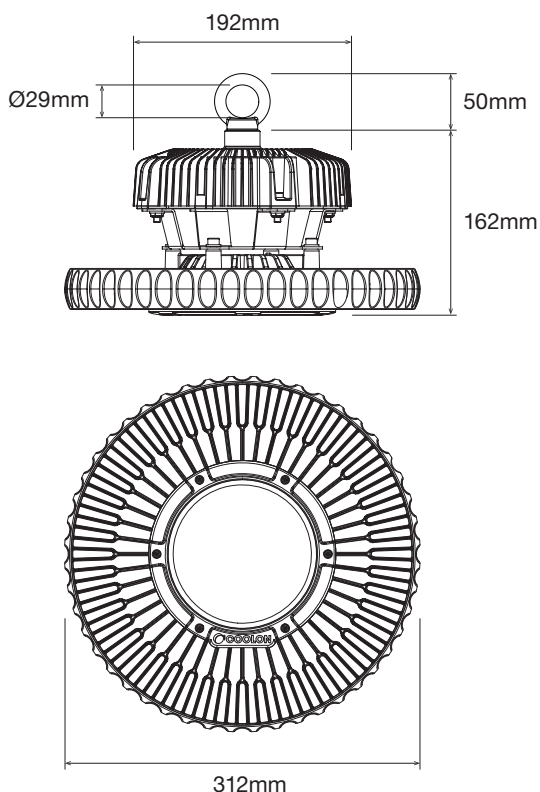


⚠ ATTENTION:

Unit must not be operated with the optical face blocked or obstructed.

The IBYS has a high intensity light output designed for warehouse applications and other clean environments. It is of critical importance that the polycarbonate optical face of the luminaire is regularly cleaned to maintain optimal performance.


Failure to keep the optical face clean may result in decreased light output and luminaire damage. Any damage sustained by the luminaire as a result of a dirty or blocked optical face is not covered under warranty.

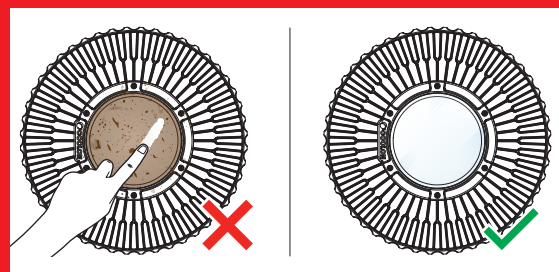

INSTALLATION INSTRUCTIONS

HOOK MOUNT

Suitable for application where the luminaire is suspended and is not likely to be swayed by the wind. This option is preferred in warehouse applications where lights may come in contact with a pallet during load racking.



Step 1

Apply LOCTITE® to eye bolt thread. LOCTITE® 277 is recommended for a permanent bond. Tighten eye bolt to driver. Hook the IBYS to chain* and connect the cable. Units not equipped with a plug must have the wires connected securely.

