


| | |
|--------------------|-------------|
| Project | Type |
| Client | Date |
| Part Number | |

SORAA[®] gable

2' x 4' (610 x 1203 mm) LED Troffer
Vivid 90 CRI, 90 R9, Rw100

Recessed LED troffer with a beautiful gable shaped luminous lens providing ambient illumination from Soraa's unparalleled full spectrum and Natural White™ accurate color and white rendering LED with 90 CRI / 90 R9 and White Rendering Index of 120.

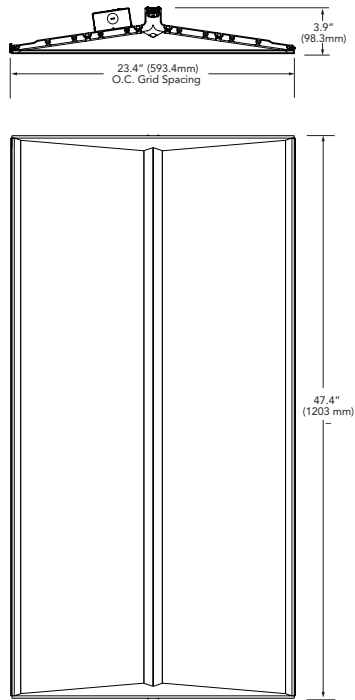

Features & Specifications

Soraa LED

The highest possible quality ambient light is provided by Soraa LEDs, available in 3000K, 3500K, and 4000K with up to 90 CRI / 90 R9. Lumen maintenance is 50,000 hours at 70% lumen output.

Soraa Optics

Precision formed Soraa OptiGuide™ optical assembly provides beautiful, even light distribution.

Construction

Injection molded endplates and extruded aluminum frame provide strength, rigidity and tight tolerances. Gridlock features are built into the endplates for additional safety and convenience. Four suspension points and seismic clips are provided. Large access plate is designed in to enable supply connection. Drivers can be accessed via plenum.

Finish

Durable frame has high reflectance baked matte white enamel finish for luminous uniformity.

Emergency Battery Pack

Optional 120V-277V integral emergency battery pack is available in 7 or 14 watts to meet critical life-safety lighting requirements. 90-minute batteries provide constant power to the LED system, ensuring code compliance.

Compliance

Luminaire cULus listed and IC rated.

Operating Temperature

Minimum -40° C, 25° C typical.

Applications

Suitable for dry locations. For interior use only.

Warranty

Five year warranty. Consult website for current information.




Build Your Fixture

Sample Part Number: **GB24 - 54 - 935- UNV - DM1**

| Series | Delivered Lumens | CCT/CRI | Voltage | Driver | Emergency | Whip |
|--------|------------------|-------------------|-------------------------------|---|---|--------------|
| GB24 | 54 5400 lm | 930 (3000K/90CRI) | UNV 120-277V Universal | DM1 0-10V (1% min) | Blank None | Blank None |
| | | 935 (3500K/90CRI) | | LU1 Lutron L3DAE Hi-lume 1% EcoSystem LED | EM7 7W Emergency Battery Pack Installed | W6 6 ft Whip |
| | | 940 (4000K/90CRI) | | LU2 Lutron L3DA3W Hi-lume 1% 3-wire LED | EM14 14W Emergency Battery Pack Installed | |
| | | | | EL1 eldoLED Eco-Drive 0% Dim | | |
| | | | EL2 eldoLED Solo-Drive 1% Dim | | | |

Soraa Arc Color and Whiteness Rendering


| CCT | CRI | R9 | Rf | Rg | Rfh1 | Rw | McA |
|------|-----|----|----|-----|------|-----|-----|
| 3000 | 90 | 90 | 90 | 100 | 90 | 100 | 3 |
| 3500 | 90 | 90 | 90 | 100 | 90 | 100 | 3 |
| 4000 | 90 | 90 | 90 | 100 | 90 | 70 | 3 |

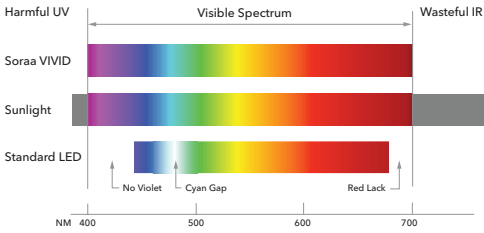


Soraa has engineered the perfect balance between color rendering and white rendering. Soraa's core technology uses a violet LED emitter as the basis for full spectrum light. This allows both Vivid™ color rendering and Natural White™ white rendering, which creates whiteness by exciting fluorescing agents with violet radiation, without the harmful effect of UV.

Rf: The TM-30 metric for color fidelity (similarity to colors under natural light), a more accurate version of the CRI Ra. Rf is 100 for natural light.
Rg: The TM-30 metric for color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.
Rfh1: The TM-30 metric for color fidelity for red tones. Rfh1 is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.
Rw: The Soraa-developed metric for white fidelity. Rw measures the magnitude of excitation of whitening agents within white materials. Rw is 100 for natural light.


3000K

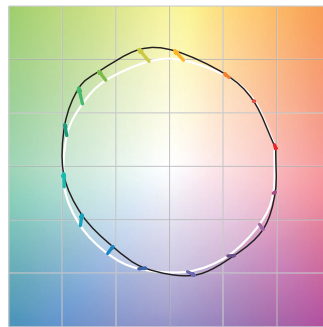

Rf: 90, Rg: 100, Rfh1: 90




Rw: 100

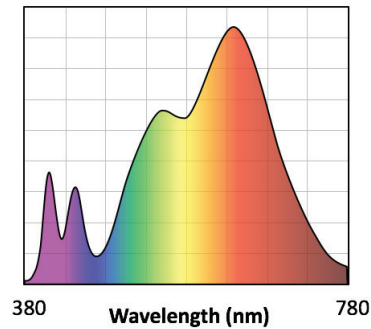


CRI: 90, R9: 90


3500K

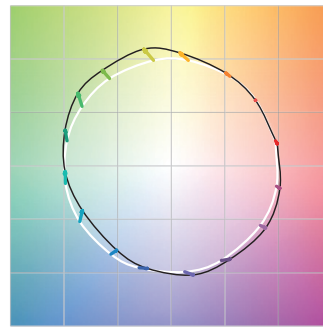

Rf: 90, Rg: 100, Rfh1: 90




Rw: 100

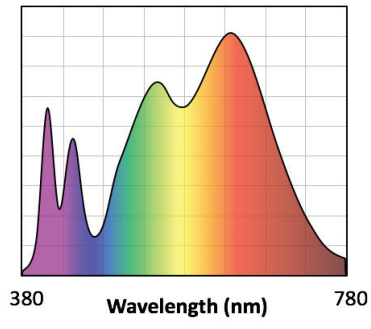


CRI: 90, R9: 90


4000K

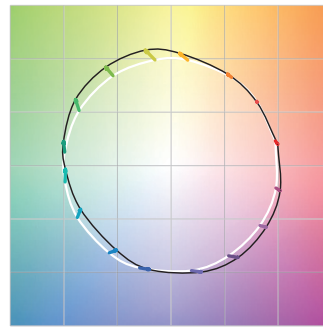

Rf: 90, Rg: 100, Rfh1: 90



Rw: 70

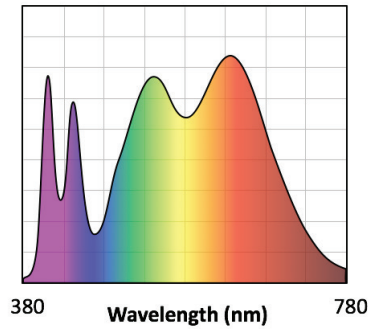

CRI: 90, R9: 90