

# ARIS UG




LINEAR MEDIUM POWER LNR-ARIS UG



## POWER

## PROFILE / LUMINOUS FLUX



**40W** 40W / metre

**UG** · 850 lm / metre

## COLOUR TEMPERATURE


2700K

3000K

4000K

## ■ DIMENSIONS

### SD Standard Profile

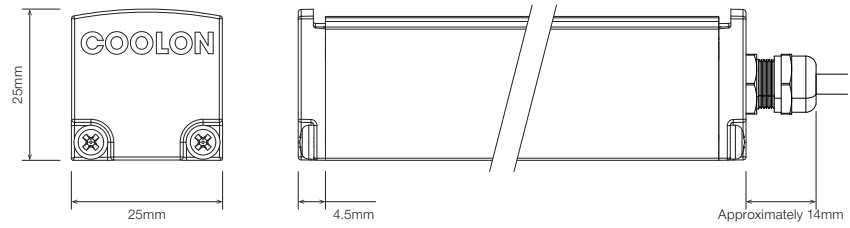

## ■ ORDERING EXAMPLE

LNR-ARIS UG	2.7K	S2A0	SD	BLK	WR2OS	WB	IP40
TYPE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING

### ■ COLOUR TEMPERATURE

- 2.7K 2700K
- 3.0K 3000K
- 4.0K 4000K

### ■ PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

\* Custom colours available on request

### ■ DIFFUSER

- SD Standard Diffuser

### ■ PROFILE COLOUR

- BLK Black (Standard)
- WHT White
- CST Custom Colour \*

### ■ WIRING CONFIGURATION

- WR2OS Wire 2 Core One Side
- SMPLC Sample Type Connector 2.5mm

### ■ WIRING POSITION

- WB Wire from Back
- WS Wire from Side

### ■ IP RATING

- IP40 Indoor Use