

MAX MINI UG



LINEAR MEDIUM POWER LNR-MAX MINI UG



POWER

PROFILE / LUMINOUS FLUX



40W 40W / metre

UG · 850 lm / metre

COLOUR TEMPERATURE

2700K

3000K

4000K



sales@coolon.com.au

aus. 1300 287 533

intl. +613 8681 3633


www.coolon.com.au

Version 1.00

All documentation is subject to change without notice. Refer to our website for the latest information.

■ DIMENSIONS

SD Standard Profile

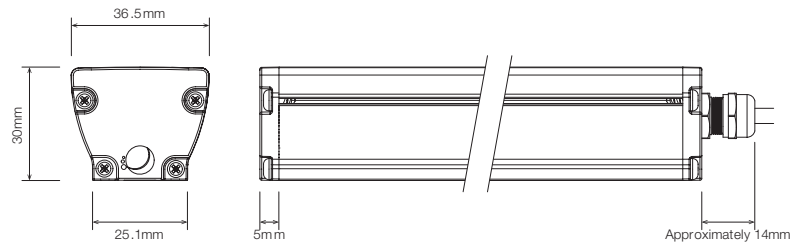

■ ORDERING EXAMPLE

LNR-MAX MINI UG	2.7K	S2A0	SD	BLK	WR2OS	WB	IP40
TYPE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING

■ COLOUR TEMPERATURE

- 2.7K 2700K
- 3.0K 3000K
- 4.0K 4000K

■ PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

* Custom colours available on request

■ DIFFUSER

- SD Standard Diffuser

■ PROFILE COLOUR

- BLK Black (Standard)
- WHT White
- CST Custom Colour *

■ WIRING CONFIGURATION

- WR2OS Wire 2 Core One Side
- SMPLC Sample Type Connector 2.5mm

■ WIRING POSITION

- WB Wire from Back
- WS Wire from Side

■ IP RATING

- IP40 Indoor Use
- IP65 Outdoor Use