

RECESS 60




RECESSED LINEAR LED LNR-RECESS 60



POWER

PROFILE / LUMINOUS FLUX



25W 25W / metre

CB · 800 lm / metre

EB · 800 lm / metre

60W 60W / metre

CB · 2000 lm / metre

EB · 2000 lm / metre

COLOUR TEMPERATURE

2700K

3000K

3500K

4000K



sales@coolon.com.au

aus. 1300 287 533

intl. +613 8681 3633


www.coolon.com.au

Version 1.00

All documentation is subject to change without notice. Refer to our website for the latest information.

DIMENSIONS

CB Covered Body Profile

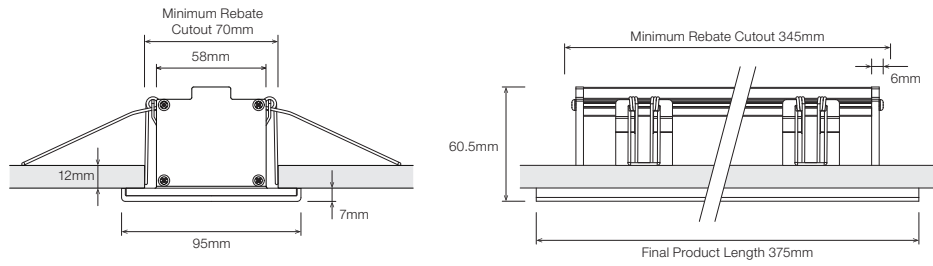

ORDERING EXAMPLE

LNR-RECESS 60	A	2.7K	S3A0	CB	BLK	WR2OS	WB	IP40
TYPE	TYPE	CCT	SEGMENTS	DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING

TYPE

- A 25W per metre
- B 60W per metre

COLOUR TEMPERATURE

- 2.7K 2700K
- 3.0K 3000K
- 3.2K 3200K
- 3.5K 3500K
- 4.0K 4000K
- 5.0K 5000K

PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

* Custom colours available on request

DIFFUSER

- CB Covered Body Diffuser
- EB Exposed Body Diffuser

PROFILE COLOUR

- BNA Brushed Natural Aluminium (Standard)
- BLK Black
- WHT White
- CST Custom Colour *

WIRING CONFIGURATION

- WR2.1OS Wire 2+1 Core One Side
- OC2.1MO Circular Connector 2+1 pin Male Only
- SMPLC.1 Sample Type Connector 2.5mm

WIRING POSITION

- WS Wire from Side

IP RATING

- IP40