

# MAXIS



LINEAR HIGH POWER PRJ-MAXIS



## POWER

## PROFILE / LUMINOUS FLUX



**60W** 60W / metre

**SC** · 3000 lm / metre

**UG** · 2100 lm / metre

## COLOUR TEMPERATURE

2700K

3000K

3200K

4000K

5000K

## COLOURS

Blue

Green

Red

Amber



sales@coolon.com.au

aus. 1300 287 533

intl. +613 8681 3633


www.coolon.com.au

Version 1.00

All documentation is subject to change without notice. Refer to our website for the latest information.

## ■ DIMENSIONS

SC Standard Profile

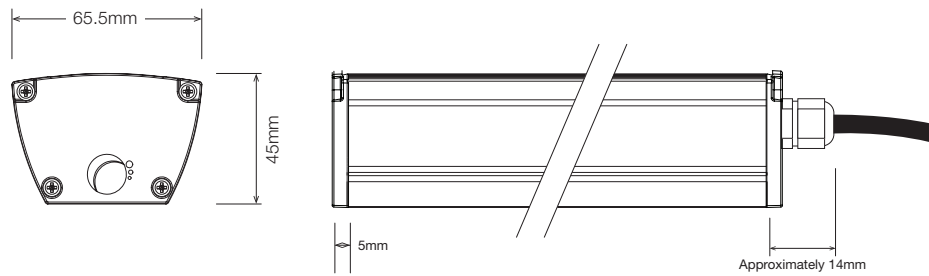

## ■ ORDERING EXAMPLE

PRJ-MAXIS	3.0K	S2	O209	SC	BLK	WR2.1OS	WB	IP65
TYPE	CCT	SEGMENTS	OPTICS	DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING

### ■ COLOUR TEMPERATURE

<input type="checkbox"/> 2.7K	2700K
<input type="checkbox"/> 3.0K	3000K
<input type="checkbox"/> 3.2K	3200K
<input type="checkbox"/> 4.0K	4000K
<input type="checkbox"/> 5.0K	5000K

### ■ PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

\* Custom colours available on request

### ■ OPTICS

<input type="checkbox"/> L07	14° Beam
<input type="checkbox"/> L25	50° Beam
<input type="checkbox"/> F5010	Flare 100° x 20° Beam
<input type="checkbox"/> O209	Oval 40° x 18° Beam
<input type="checkbox"/> NOP	No Optics <b>UG</b>

### ■ DIFFUSER

- SC Standard Clear
- UG Uniform Glow **UG**

### ■ PROFILE COLOUR

- BLK Black (Standard)
- WHT White
- CST Custom Colour \*

### ■ WIRING CONFIGURATION

- WR2.1OS Wire 2+1 Core One Side
- OC2.1MO Outdoor Connector 3pin Male Only
- SMPLC.1 Sample Type Connector 2.5mm

### ■ WIRING POSITING

- WB Wire from Back
- WS Wire from Side

### ■ IP RATING

- IP40 Indoor Use
- IP65 Outdoor Use