

FORMA

LED STRIP STR-FORMA



POWER

PROFILE / LUMINOUS FLUX



11W	11.2W / metre	SD · 1010 lm / metre	LL · 385 lm / metre
16W	16.8W / metre	SD · 1540 lm / metre	LL · 560 lm / metre
33W	33.6W / metre	SD · 2800 lm / metre	LL · 1155 lm / metre

COLOUR TEMPERATURE


2700K

3000K

4000K

■ DIMENSIONS

SD Standard Profile

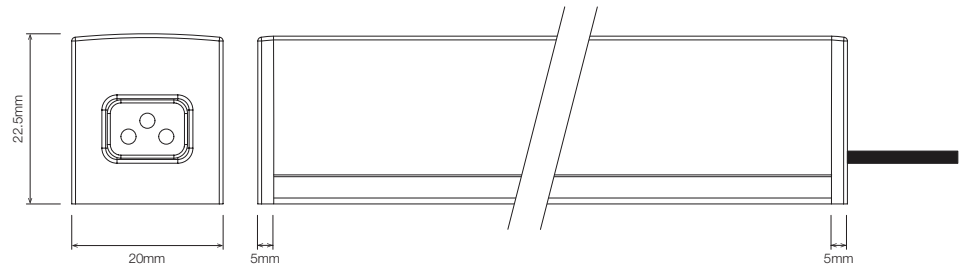

■ ORDERING EXAMPLE

STR-FORMA	16W	3.0K	S2A0	SD	WHT	WR2BS 100	IP40	
TYPE	WATTAGE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING LENGTH	IP RATING

■ WATTAGE

- 11W 11.2W per Metre
- 16W 16.8W per Metre
- 33W 33.6W per Metre

■ COLOUR TEMPERATURE *

- 2.7K 2700K CRI 80
- 2.7KCRI 2700K CRI 90
- 3.0K 3000K CRI 80
- 3.0KCRI 3000K CRI 90
- 4.0K 4000K CRI 80
- 4.0KCRI 4000K CRI 90

■ PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

* Other CCT subject to availability.

** Custom colours available on request.

■ DIFFUSER / LOUVRE

- SD No Louvre
- HL Honeycomb Louvre
- LL Longitudinal Louvre

■ PROFILE COLOUR **

- WHT White (Standard)
- BLK Black
- CST Custom Colour

■ WIRING CONFIGURATION

- WR2OS Wire 2 Core One Side
- WR2BS Wire 2 Core Both Sides
- OC2MO Outdoor Connector 2 pin Male Only
- OC2MF Outdoor Connector 2 pin Male + Female
- SMPLC Sample Type Connector 2.5mm

■ WIRING LENGTH

- 100 100mm
- 250 250mm
- 500 500mm
- 1000 1000mm

■ IP RATING

- IP40 Indoor Use