

PRIMO CC



LED STRIP CHAIN MODULE STR-PRIMO CC



POWER

PROFILE / LUMINOUS FLUX



11W 11 – 14W / metre

SD · 1000 lm / metre

COLOUR TEMPERATURE

2200K

2500K

2700K



3000K

4000K

5000K

■ DIMENSIONS

SD Standard Profile

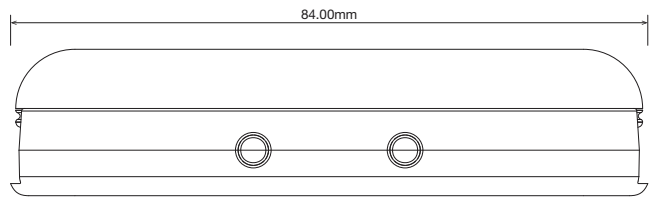

■ ORDERING EXAMPLE

STR-PRIMO CC	3.0K	S1	SD	WR2.1OS	IP20
TYPE	CCT	SEGMENTS	PROFILE / DIFFUSER	WIRING CONFIG.	IP RATING

■ COLOUR TEMPERATURE *

- 2.2K 2200K
- 2.5K 2500K
- 2.7K 2700K
- 3.0K 3000K
- 4.0K 4000K
- 5.0K 5000K

■ PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

* Other CCT subject to availability.

■ PROFILE / DIFFUSER

- SD Standard Diffused

■ WIRING CONFIGURATION

- WR2OS Wire 2 Core One Side
- SMPLC Sample Type Connector 2.5mm
- WR2OS Wire 2 Core One Side

■ IP RATING

- IP20