

# SLIM

LED STRIP STR-SLIM UG



## POWER

## PROFILE / LUMINOUS FLUX



**12W** 12.4W / metre

**SD** · 200 lm / metre

## COLOUR TEMPERATURE

2700K

3000K

3500K

4000K



[sales@coolon.com.au](mailto:sales@coolon.com.au)

**aus.** 1300 287 533

**intl.** +613 8681 3633


[www.coolon.com.au](http://www.coolon.com.au)

Version 1.00

All documentation is subject to change without notice. Refer to our website for the latest information.

## ■ DIMENSIONS

SD Standard Profile

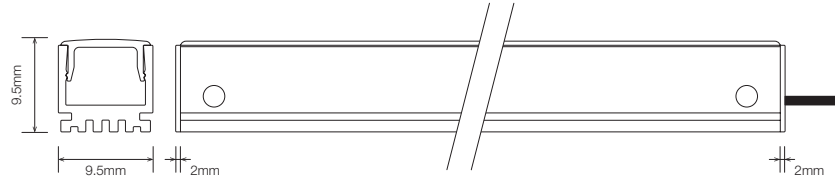

## ■ ORDERING EXAMPLE

STR-SLIM UG	3.0K	S2A1	SD	BLK	WR2BS	100	IP40
TYPE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING LENGTH	IP RATING

### ■ COLOUR TEMPERATURE

- 2.7K 2700K
- 3.0K 3000K
- 3.5K 3500K
- 4.0K 4000K

### ■ PRODUCT LENGTH

- Length as per Site Measurements
- Length:
- Undefined

\* Custom colours available on request.

### ■ PROFILE / DIFFUSER

- SD Standard Profile Diffused

### ■ PROFILE COLOUR \*

- BLK Black (Standard)
- GRY Grey
- CST Custom Colour

### ■ WIRING CONFIGURATION

- WR2OS Wire 2 Core One Side
- WR2BS Wire 2 Core Both Sides
- OC2MO Connector 2 pin Male Only
- OC2FO Connector 2 pin Female Only
- OC2MF Connector 2 pin Male + Female
- SMPLC Sample Type Connector 2.5mm

### ■ WIRING LENGTH

- 100 100mm
- 250 250mm
- 500 500mm
- 1000 1000mm

### ■ IP RATING

- IP40 Indoor use