

MIRA



LINEAR HIGH POWER PRJ-MIRA



POWER

PROFILE / LUMINOUS FLUX



60W 60W / metre

SC · 3000 lm / metre

COLOUR TEMPERATURE

2700K

3000K

3200K

4000K

5000K



sales@coolon.com.au


aus. 1300 287 533

intl. +613 8681 3633

www.coolon.com.au

All documentation is subject to change without notice. Refer to our website for the latest information.

■ DIMENSIONS

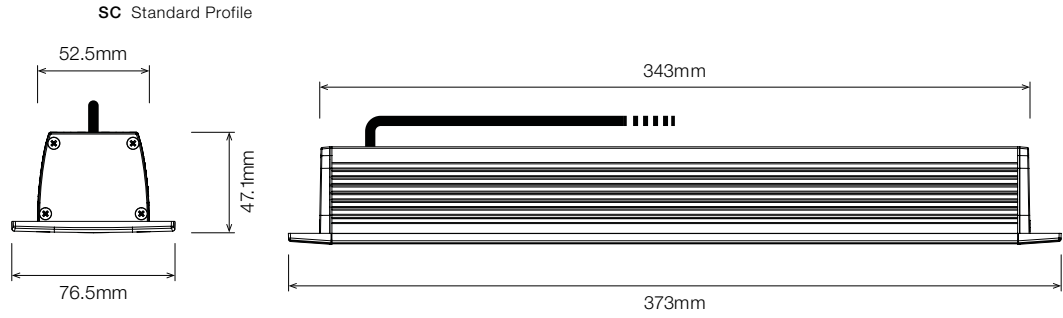

■ ORDERING EXAMPLE

PRJ-MIRA	3.0K	S2	O209	SC	BLK	WR2.1OS	WB	IP65
TYPE	CCT	SEGMENTS	OPTICS	DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING

■ COLOUR TEMPERATURE

2.7K	2700K
3.0K	3000K
3.2K	3200K
4.0K	4000K
5.0K	5000K

■ PRODUCT LENGTH

Length as per Site Measurements
Length:
Undefined

* Custom colours available on request

■ OPTICS

L07	14° Beam
L25	50° Beam
F5010	Flare 100° x 20° Beam
O209	Oval 40° x 18° Beam
NOP	No Optics

■ DIFFUSER

SC	Standard Clear
----	----------------

■ PROFILE COLOUR

BLK	Black (Standard)
WHT	White
CST	Custom Colour *

■ WIRING CONFIGURATION

WR2.1OS	Wire 2+1 Core One Side
OC2.1MO	Outdoor Connector 3pin Male Only
SMPLC.1	Sample Type Connector 2.5mm

■ WIRING POSITING

WB	Wire from Back
WS	Wire from Side

■ IP RATING

IP40	Indoor Use
IP65	Outdoor Use