


KOMATSU



PC4000

Lighting Design Simulation Report

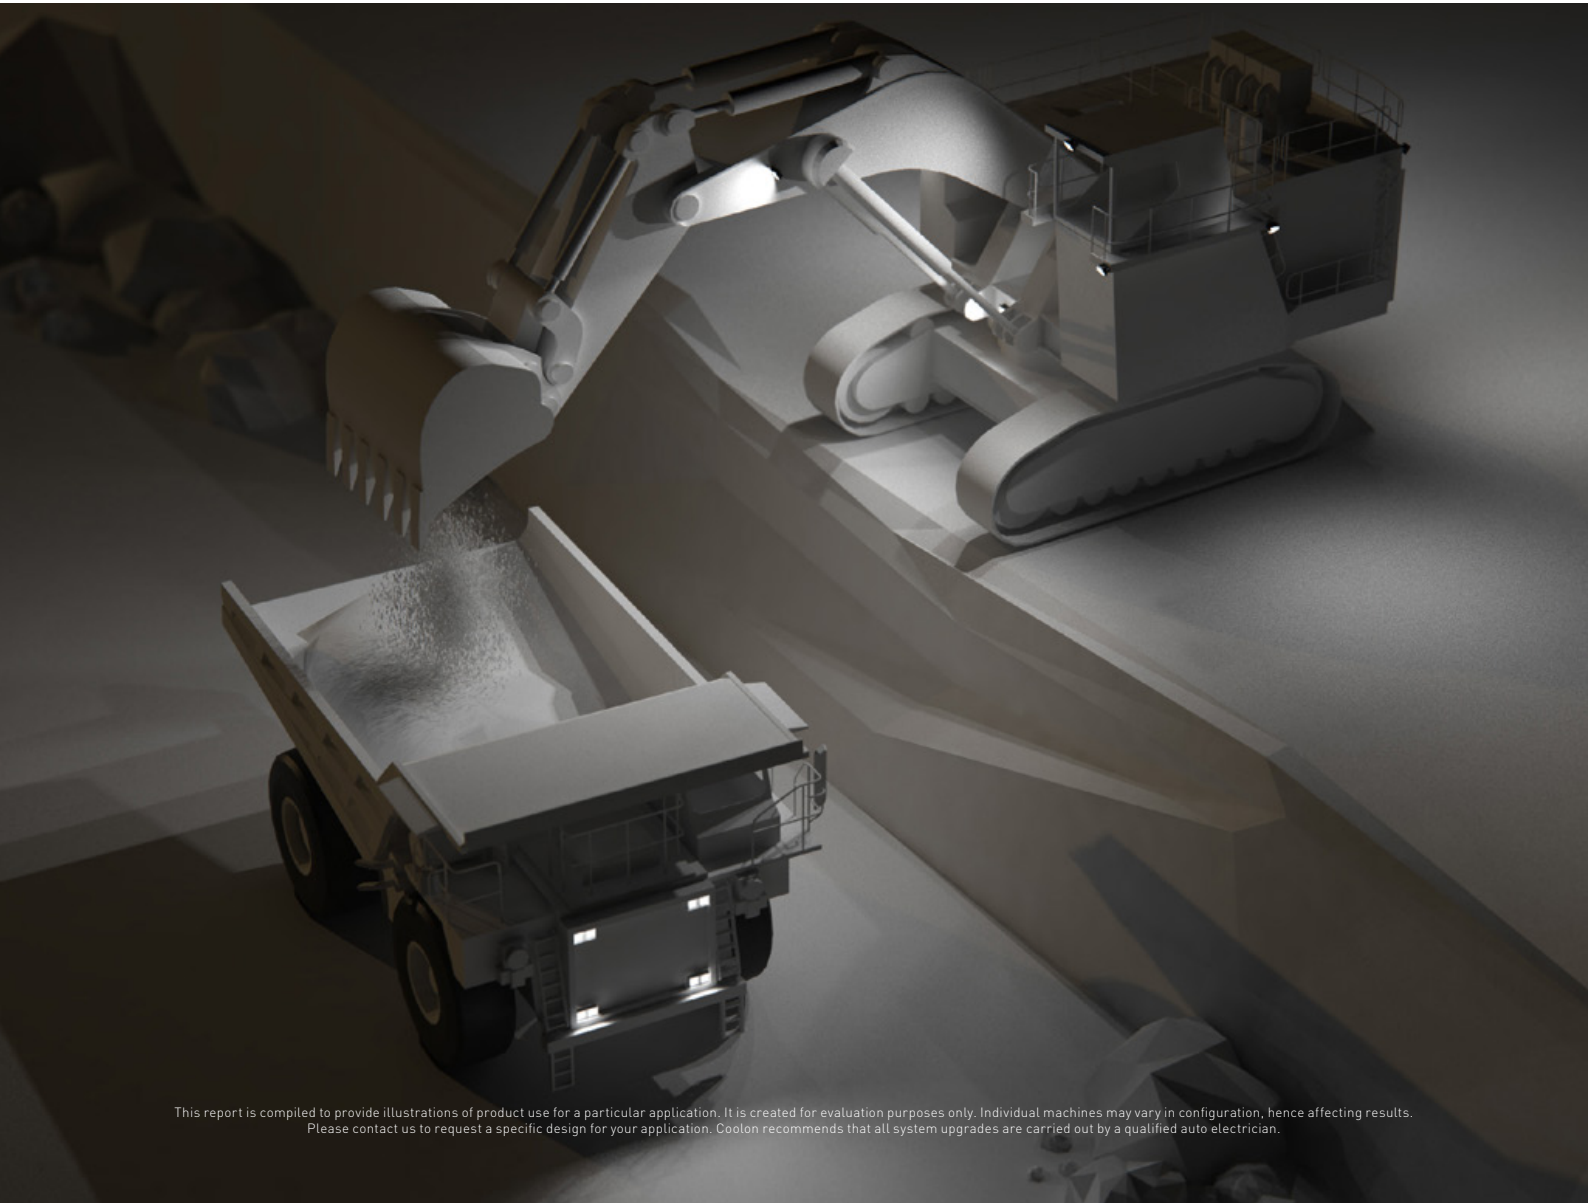

SIMULATION


KOMATSU PC4000
OPTION A

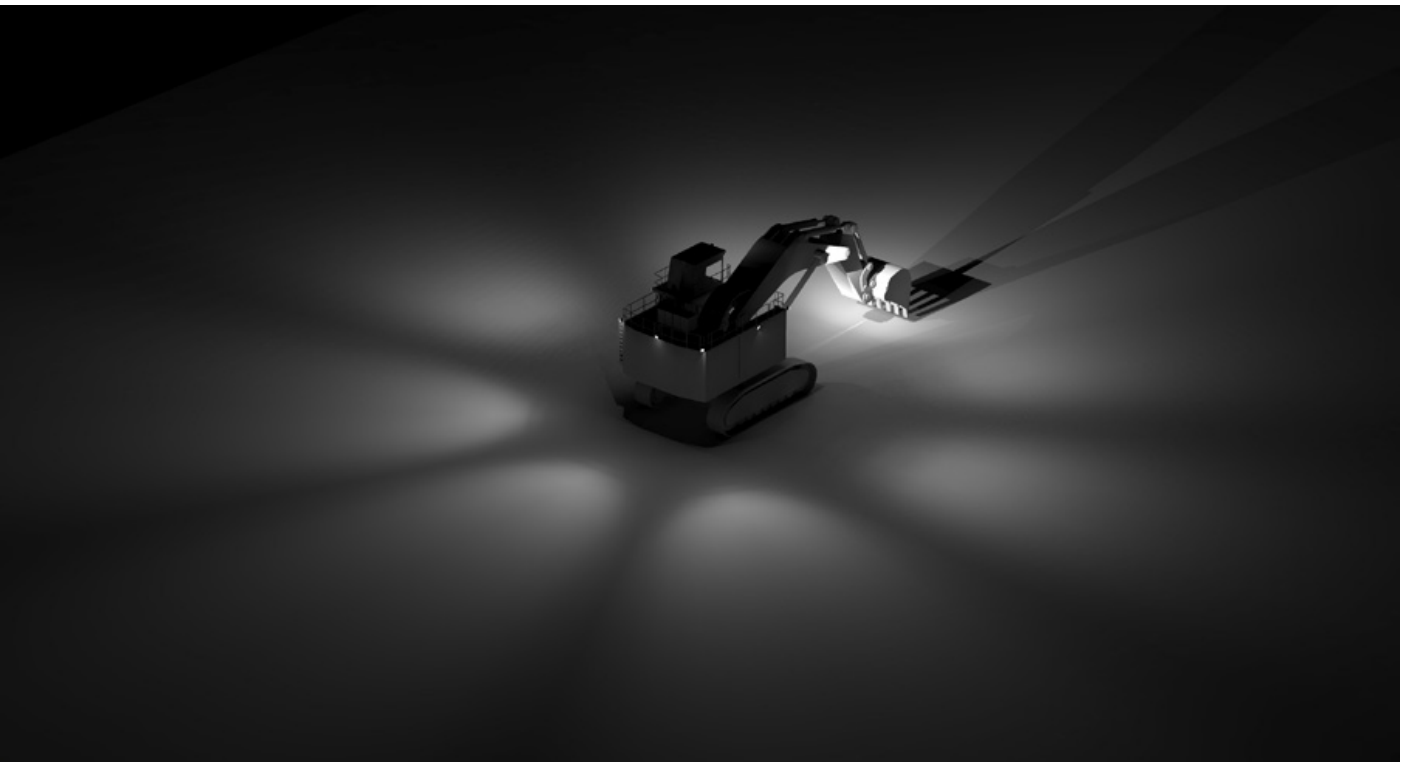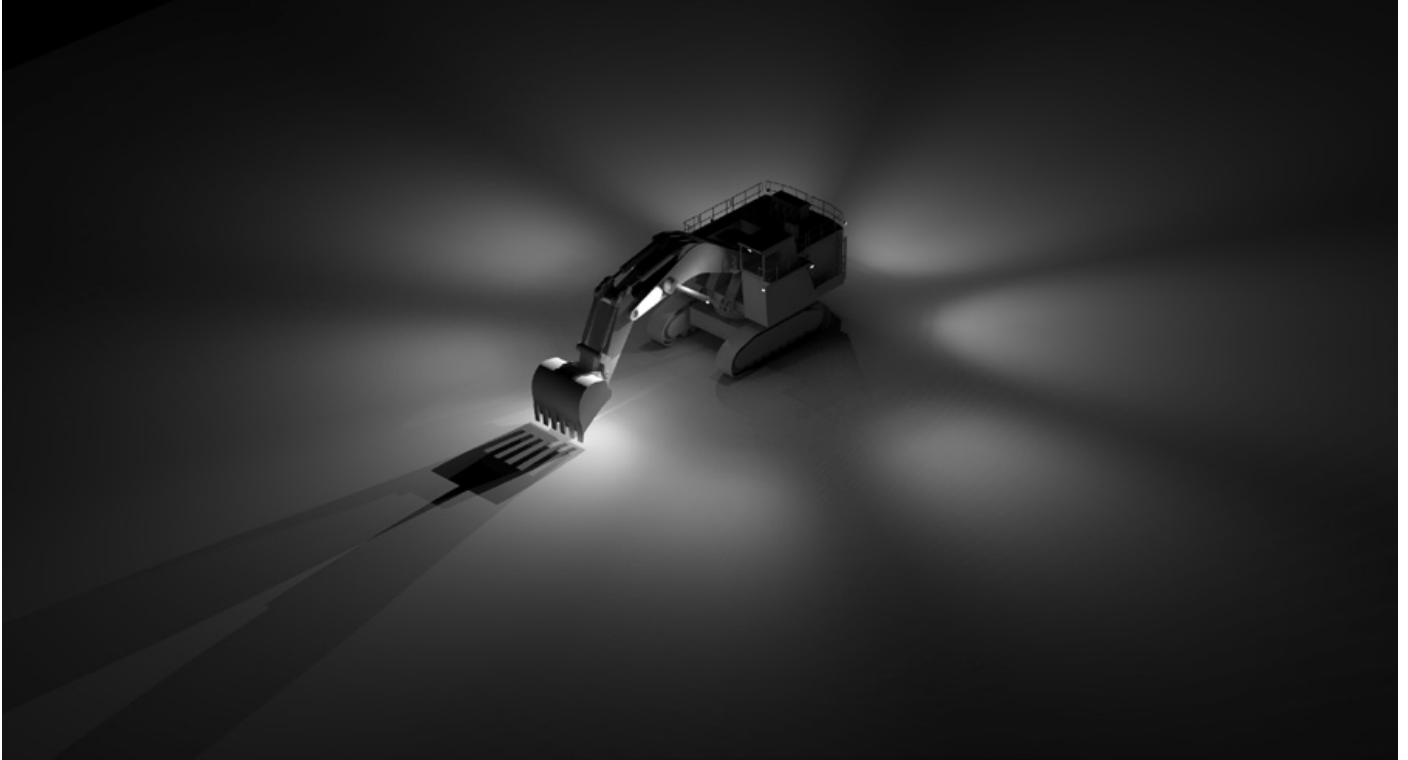

LUMINAIRE SCHEDULE


KOMATSU PC4000 OPTION A

Model No.	Luminaire	Optic Type	Quantity
CP24-0209	CP24 Flood Light	O209 - 40° x 18° Beam Angle	6
CP24-L25	CP24 Flood Light	L25 - 50° Beam Angle	5

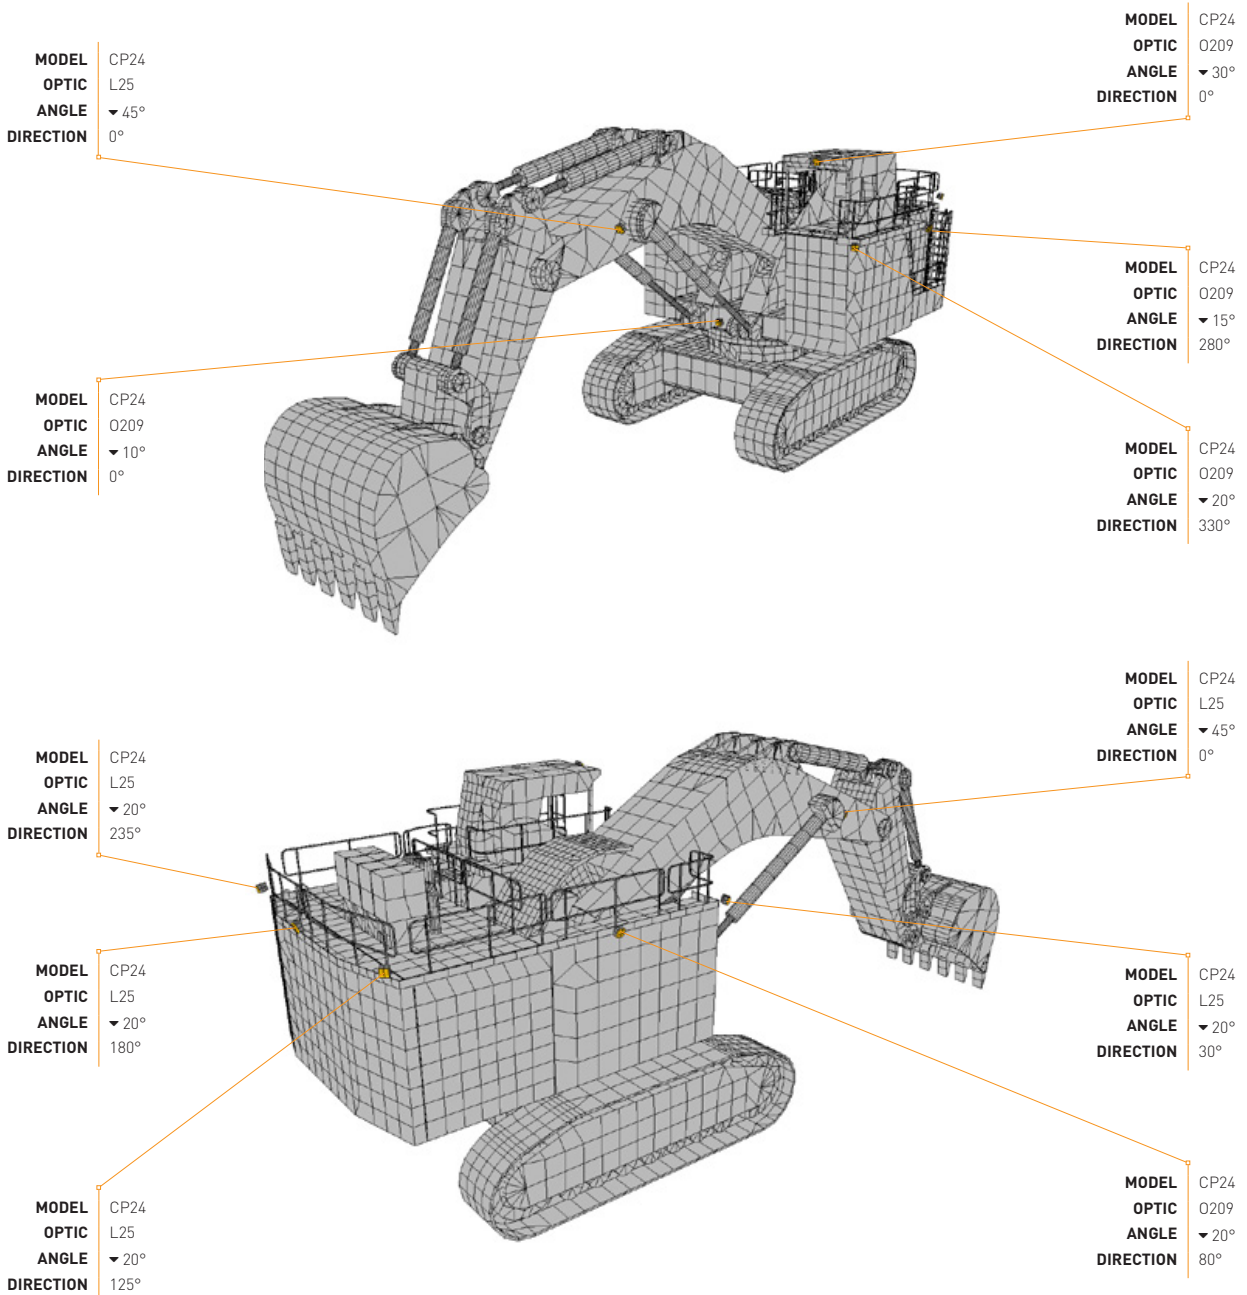

ISOLINE VIEW

KOMATSU PC4000
OPTION A

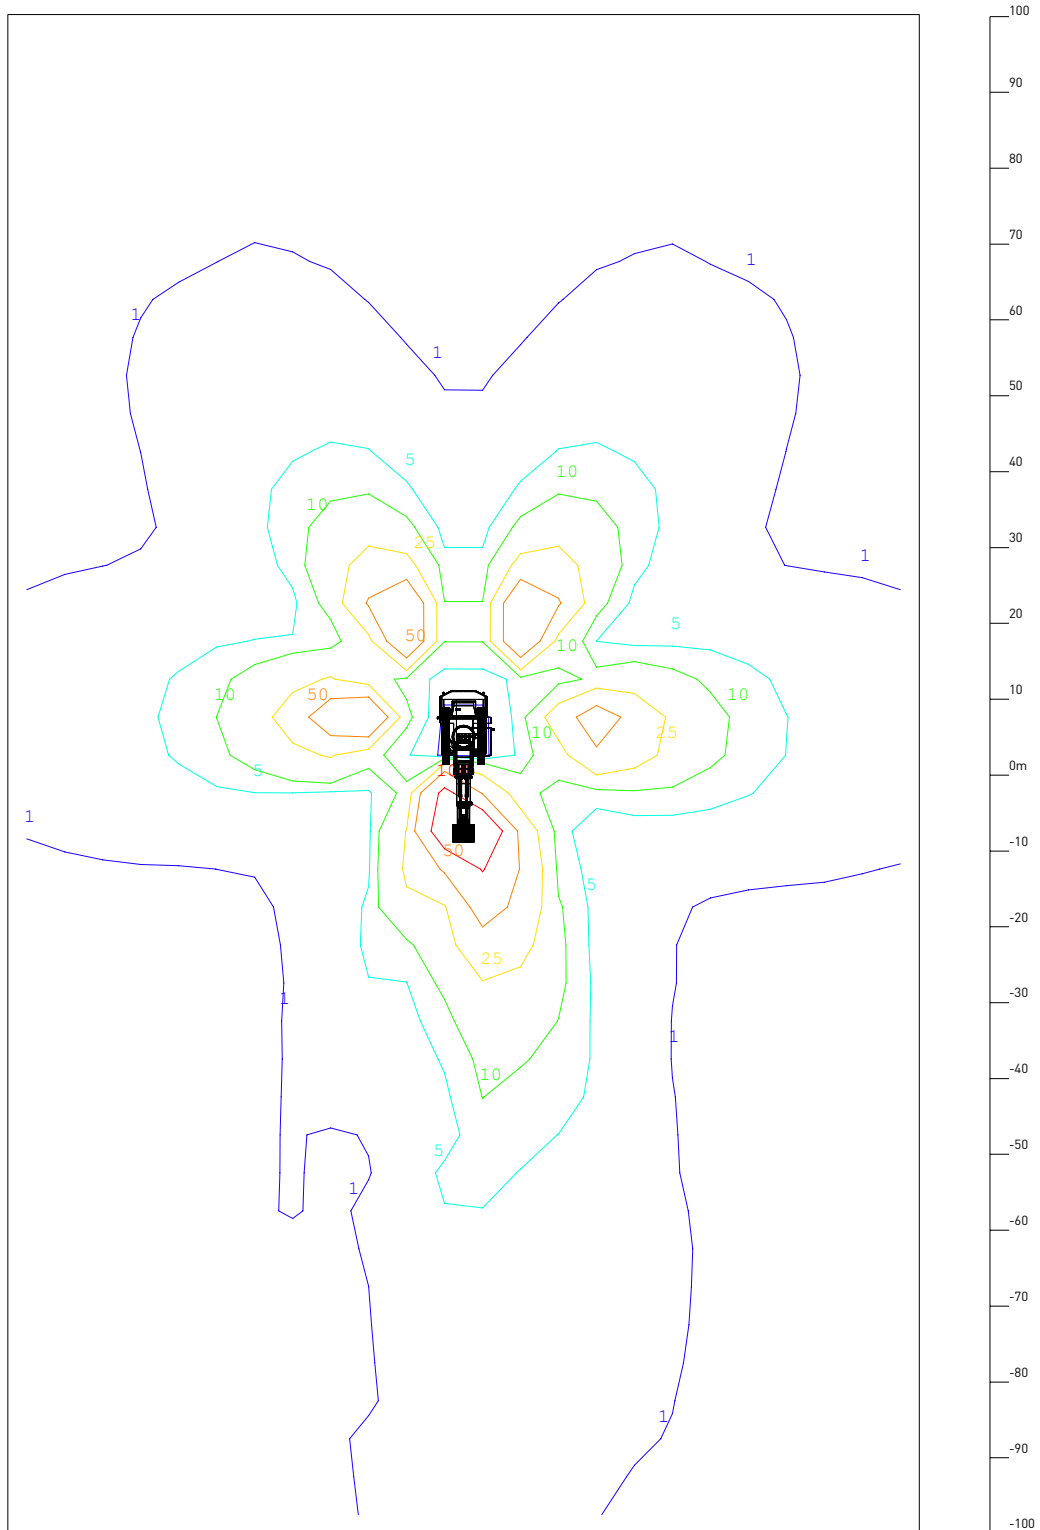


OPERATOR'S VIEW

KOMATSU PC4000
OPTION A



SIMULATION


KOMATSU PC4000 OPTION B

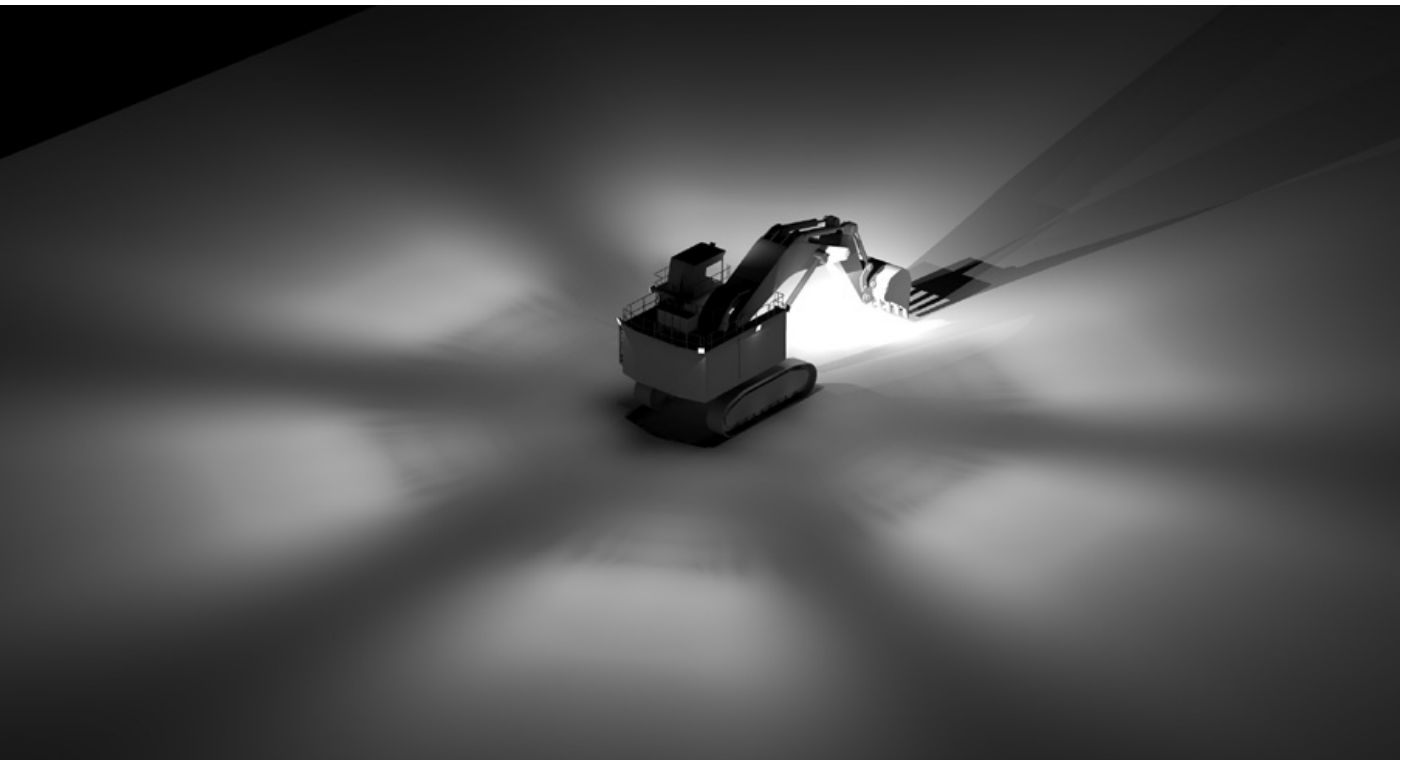

LUMINAIRE SCHEDULE


KOMATSU PC4000 OPTION B

Model No.	Luminaire	Optic Type	Quantity
CP56-0209	CP56 Flood Light	O209 - 40° x 18° Beam Angle	7
CP56-L25	CP56 Flood Light	L25 - 50° Beam Angle	1
CP24-L25	CP24 Flood Light	L25 - 50° Beam Angle	2

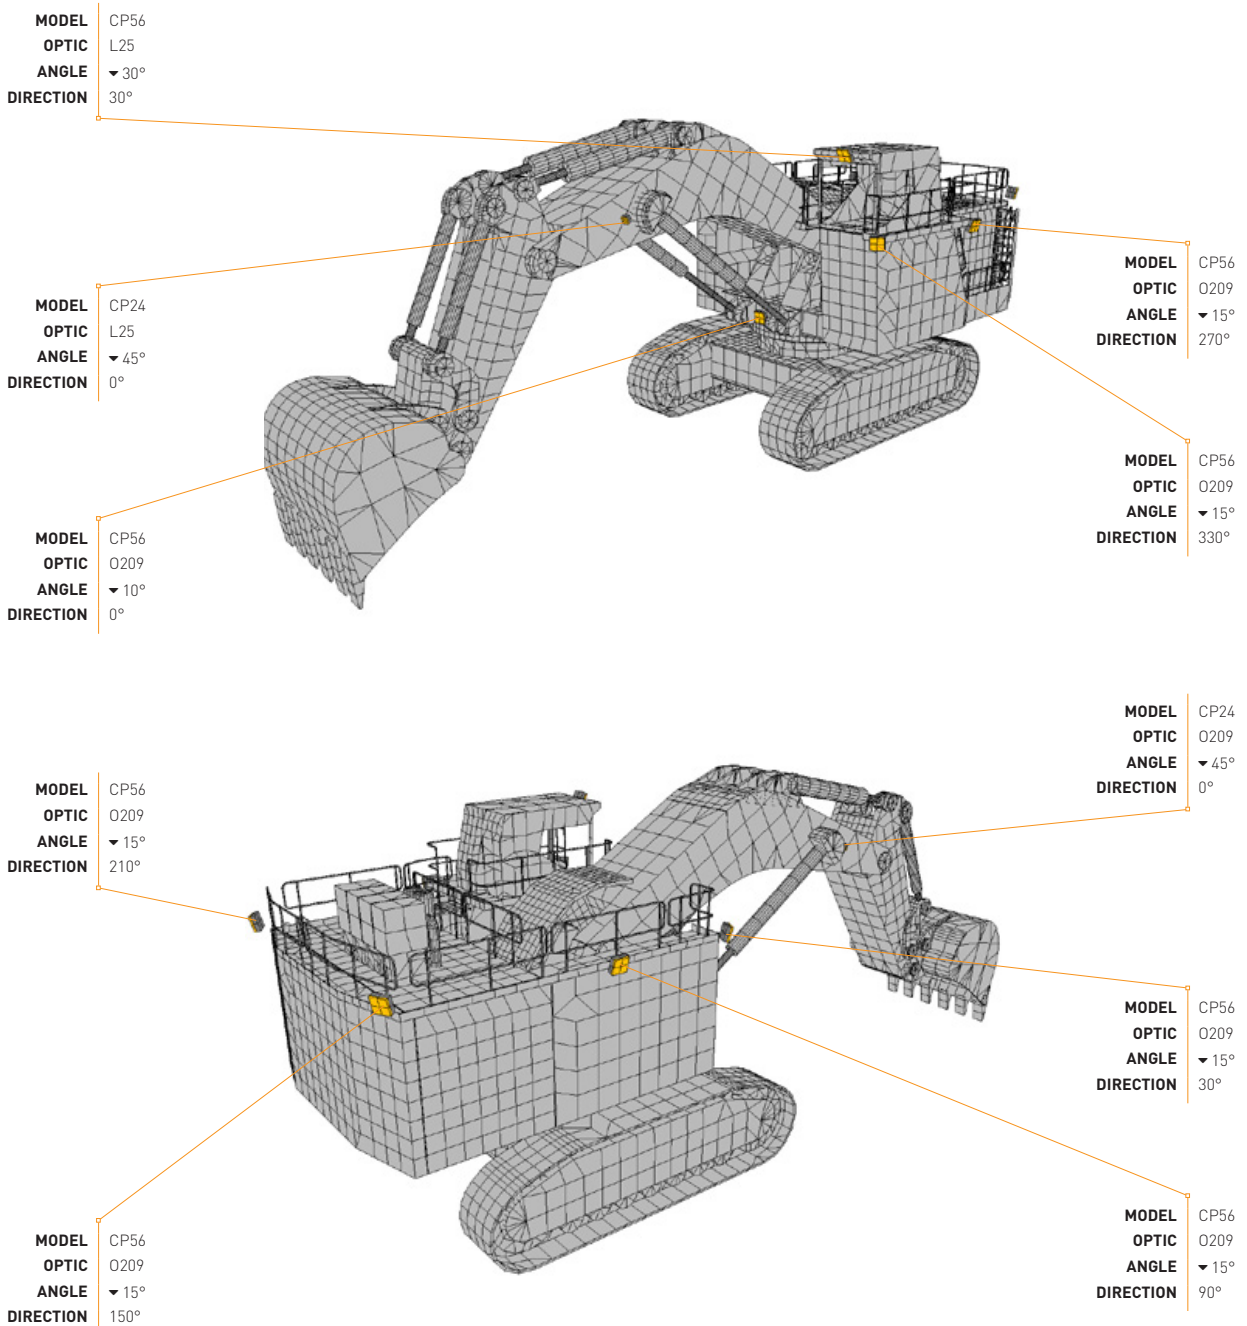

ISOLINE VIEW

KOMATSU PC2000
OPTION B

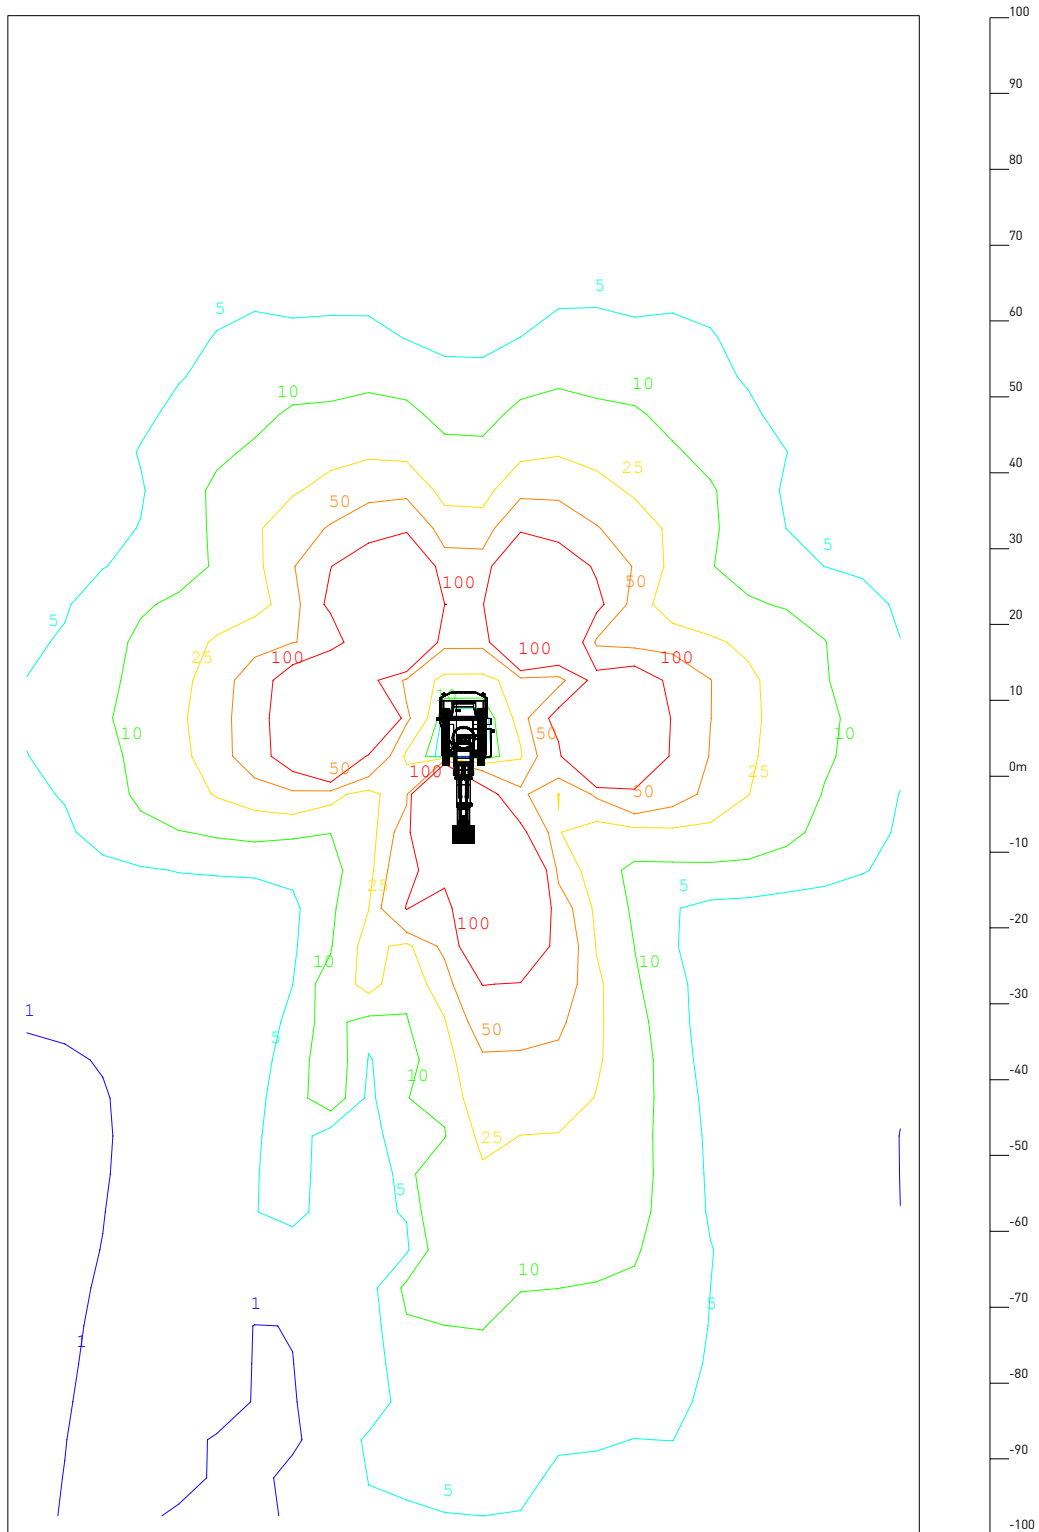

OPERATOR'S VIEW

KOMATSU PC4000
OPTION B

