

MAX MINI



LINEAR MEDIUM POWER LNR-MAX MINI



POWER

PROFILE / LUMINOUS FLUX



SC

HL

ML

33W 33W / metre

1,600 lm / metre

COLOUR TEMPERATURE

2700K


3000K

3500K

4000K

5000K

DIMENSIONS

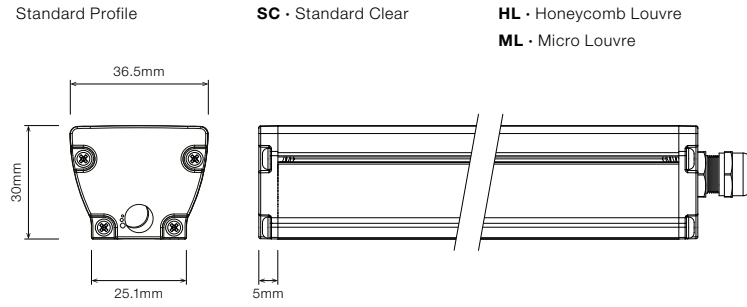

ORDERING EXAMPLE

TYPE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING
LNR-MAX MINI	3.5KCRI	S2	O209	SC	BLK	WR2.1OS	WB	IP40
COLOUR TEMPERATURE				PROFILE / DIFFUSER				
2.7KCRI	2700K CRI 90			SC	Standard Profile Clear			
3.0KCRI	3000K CRI 90			HL	Honeycomb Louvre			
3.5KCRI	3500K CRI 90			ML	Micro Louvre			
4.0KCRI	4000K CRI 90				PROFILE COLOUR			
5.0KCRI	5000K CRI 90				BLK	Black (Standard)		
					WHT	White		
					CST	Custom Colour ¹		
PRODUCT LENGTH				WIRING CONFIGURATION				
Length as per Site Measurements				WR2.1OS	Wire 2+1 Core One Side			
Length:				OC2.2MO	Outdoor Connector 2.2 pin Male Only			
Undefined				SMPLC.1	Sample Type Connector 2.5mm			
OPTICS				WIRING POSITION				
L07	14° Beam			WB	Wire from Back			
L25	50° Beam			WS	Wire from Side			
F5010	Flare 100° x 20° Beam				IP RATING			
O209	Oval 40° x 18° Beam			IP40	Indoor Use			

¹ Custom colours available on request.