

BEAM




LINEAR BEAM MOUNT PRJ-BEAM



POWER

PROFILE / LUMINOUS FLUX



SC

SD

60W 60W / metre

3,000 lm / metre

COLOUR TEMPERATURE

2700K

3000K

3200K

4000K


DIMENSIONS

Standard Profile

SC • Standard Clear

SD • Standard Diffused

WB • Wire from Back

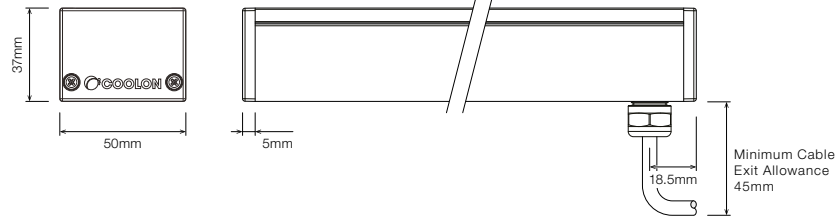

WS • Wire from Side



ORDERING EXAMPLE

PRJ-BEAM	3.0KCRI	S2	O4018D	SC	BLK	WR2.1OS	WB	IP40
TYPE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING
COLOUR TEMPERATURE								
2.7KCRI	2700K CRI 90							
3.0KCRI	3000K CRI 90							
3.2KCRI	3200K CRI 90							
4.0KCRI	4000K CRI 90							
PRODUCT LENGTH								
Length as per Site Measurements								
Length:								
Undefined								
OPTICS								
14D	14° Beam							
30D	30° Beam							
50D	50° Beam							
F10020D	Flare 100° x 20° Beam							
O4018D	Oval 40° x 18° Beam							
R4018D	Oval 18° x 40° Beam							
A3020D	Asymmetric 30° x 20° Beam							
PROFILE / DIFFUSER								
SC	Standard Profile Clear							
SD	Standard Profile Diffused							
PROFILE COLOUR ¹								
BLK	Black (Standard)							
WHT	White							
CST	Custom Colour							
WIRING CONFIGURATION								
WR2.1OS	Wire 2+1 Core One Side							
OC2.1MO	Outdoor Connector 2.1 pin Male Only							
SMPLC.1	Sample Type Connector 2.5mm							
WIRING POSITION								
WB	Wire from Back							
WS	Wire from Side							
IP RATING								
IP40	Indoor Use							

¹ Custom colours available on request.