

MAXIS



LINEAR HIGH POWER PRJ-MAXIS



POWER

PROFILE / LUMINOUS FLUX



SC

60W 60W / metre

3,000 lm / metre

COLOUR TEMPERATURE

2700K

3000K

3200K



4000K

DIMENSIONS



Standard Profile

SC • Standard Clear

WB • Wire from Back

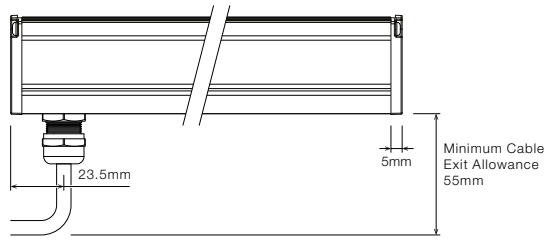

WS • Wire from Side

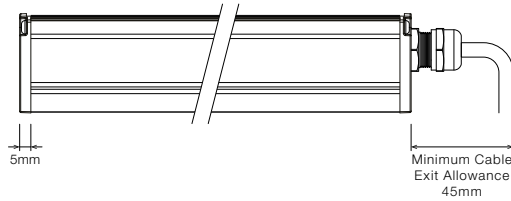

ORDERING EXAMPLE

PRJ-MAXIS	3.0KCRI	S2	O4018D	SC	WHT	WR5OS	WB	IP40
TYPE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING
COLOUR TEMPERATURE								
2.7KCRI	2700K CRI 90							
3.0KCRI	3000K CRI 90							
3.2KCRI	3200K CRI 90							
4.0KCRI	4000K CRI 90							
PRODUCT LENGTH								
Length as per Site Measurements								
Length:								
Undefined								
OPTICS								
14D	14° Beam							
30D	30° Beam							
50D	50° Beam							
F10020D	Flare 100° x 20° Beam							
O4018D	Oval 40° x 18° Beam							
R4018D	Oval 18° x 40° Beam							
A3020D	Asymmetric 30° x 20° Beam							
PROFILE / DIFFUSER								
SC Standard Profile Clear								
PROFILE COLOUR								
BLK Black (Standard)								
WHT White								
CST Custom Colour ¹								
WIRING CONFIGURATION								
WR2.1OS Wire 2+1 Core One Side								
OC2.1MO Outdoor Connector 2.1 pin Male Only								
SMPLC.1 Sample Type Connector 2.5mm								
WIRING POSITION								
WB Wire from Back								
WS Wire from Side								
IP RATING								
IP40 Indoor Use								

¹ Custom colours available on request.