


# ADURO X2



LED STRIP STR-ADURO X2

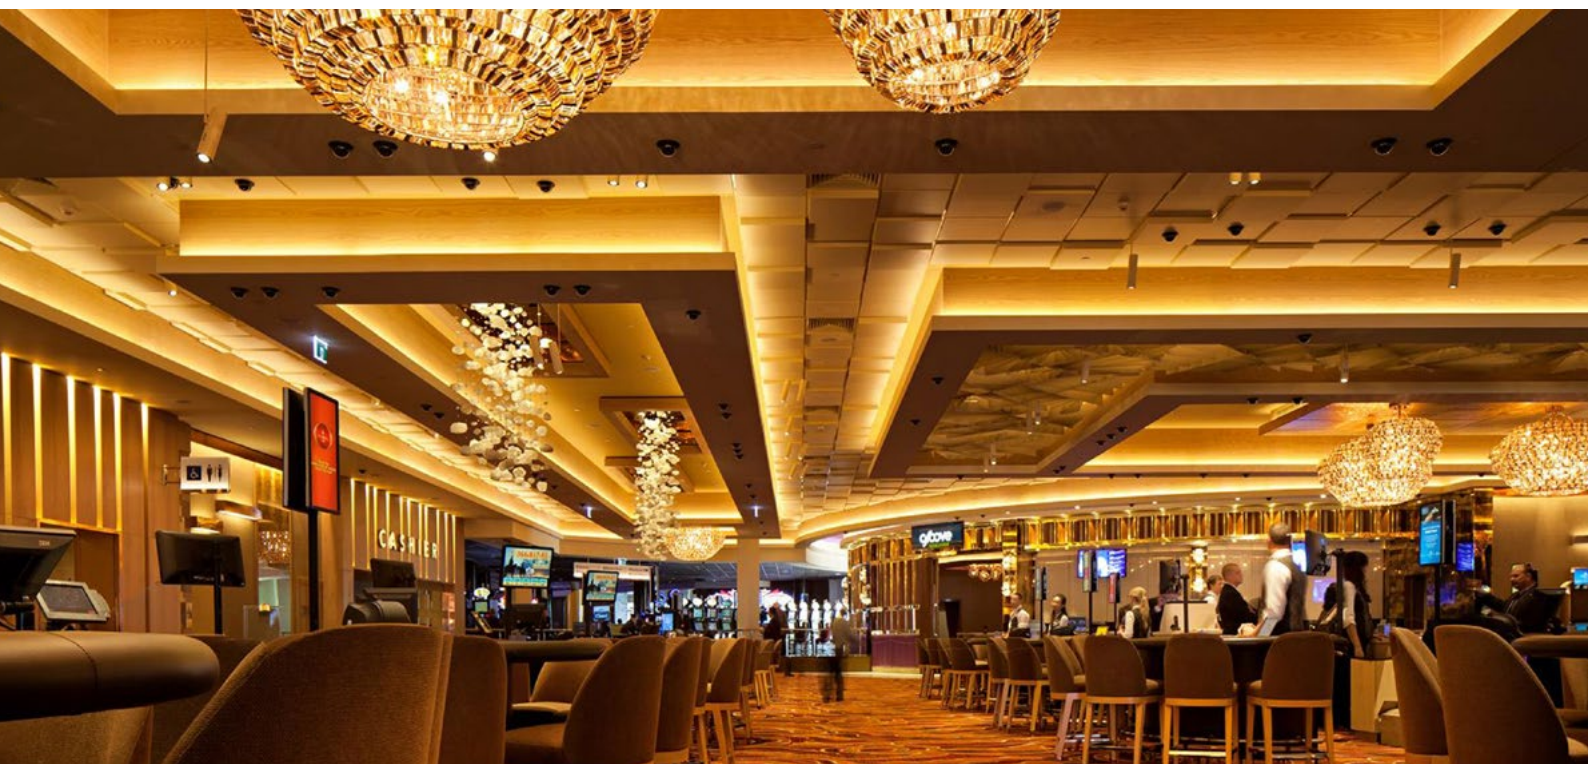

## POWER

## PROFILE / LUMINOUS FLUX



### P17D2

**11W** 11W / metre

610 lm / metre

**23W** 23W / metre

1,250 lm / metre

## COLOUR TEMPERATURE

2700K


3000K

3500K


4000K

## DIMENSIONS

**P17D2** · P17 Profile



**PR17D2** · P17 Recessed Profile



## ORDERING EXAMPLE

TYPE	WATTAGE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING LENGTH	IP RATING
------	---------	-----	----------	--------	--------------------	----------------	----------------	---------------	-----------

### WATTAGE

11W	11W per metre
23W	23W per metre

### COLOUR TEMPERATURE <sup>1</sup>

2.7KCRI	2700K CRI 90
3.0KCRI	3000K CRI 90
3.5KCRI	3500K CRI 90
4.0KCRI	4000K CRI 90

### PRODUCT LENGTH

Length as per Site Measurements
Length:
Undefined

### OPTICS

L15	25° – 30° Beam
L25	42° – 50° Beam
O209	Oval 40° x 18° Beam

### PROFILE / DIFFUSER

P17D2	P17 Profile Diffused
PR17D2	P17 Recessed Profile Diffused

### PROFILE COLOUR <sup>2</sup>

BLK	Black (Standard)
WHT	White
GRY	Grey
CST	Custom Colour

### WIRING CONFIGURATION

WR2.1OS	Wire 2+1 Core One Side
WR2.1BS	Wire 2+1 Core Both Sides
OC2.1MO	Outdoor Connector 2+1 pin Male Only
OC2.1MF	Outdoor Connector 2+1 pin Male + Female
SMPLC.1	Sample Type Connector 2.5mm

### WIRING LENGTH

100	100mm
250	250mm
500	500mm
1000	1,000mm

### IP RATING

IP40	Indoor Use
------	------------

<sup>1</sup> Other CCT subject to availability.

<sup>2</sup> Custom colours available on request.