


ALTO IP

LED STRIP STR-ALTO IP



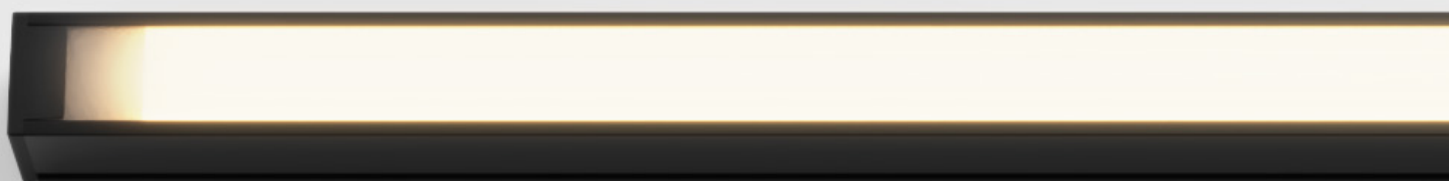

The Alto IP LED strip is where value and performance go hand-in-hand. The Alto IP offers the best bang for your buck on projects where the key consideration is efficacy, lumen output and value.

The Alto IP offers a completely uniform glowing diffuser where no dots or scalloping is visible along the length of the luminaire or the illuminated surface.

POWER

11W

11.2W / metre



P20T • 301 – 1,095 lm / metre

16W

16.8W / metre



P20T • 443 – 1,610 lm / metre

33W

33.6W / metre



P20T • 831 – 3,148 lm / metre

COLOUR TEMPERATURE

2700K

3000K

4000K



ELEGANT ENCAPSULATION

Alto IP utilises Coolon's encapsulation technology to deliver a truly extraordinary outdoor luminaire. IP66, IK08, shock and abrasion resistance, thermal protection, and dashing good looks, all in one.

HIGHLY VERSATILE LENGTH OPTIONS

Highly versatile length options allows the user to achieve much more accurate and adaptable lengths. The Alto IP is able to achieve any desired length within a 37.5mm increment.



L90

LONG OPERATING LIFE

Coolon products use the world's most reputable LED manufacturers and the latest available standards to adequately report lumen maintenance. We strive to drive LEDs under their nominal current and use state-of-the-art heat dissipation methods, leading to durable electronics.



VARIOUS CCT & COLOUR BINNING CONSISTENCY

All products are offered in various colour temperatures, and manufactured using tighter bins, ensuring excellent consistency and uniformity.

5
YEARS

5 YEARS WARRANTY

Coolon luminaires are covered by a solid comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



PROUDLY MADE IN AUSTRALIA

Our products are designed and manufactured in Australia. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested to ensure that it exceeds the highest standards.

TECHNICAL SPECIFICATIONS

	11W VERSION	16W VERSION	33W VERSION
Part Number	STR-ALTO IP		
Description	Alto IP Low Power LED Strip		
Segment Length (S)	300mm		
Sub-Segment Length (A)	37.5mm		
Number of Sub-Segments	8		
Segment Width	10.50mm		
LED Pitch	5.35mm		
LEDs Per Segment	56		
LEDs Per Sub Segment	7		
Operating Voltage	42VDC (Requires Class II / SELV compliant power supply)		
Electrical Safety Classification	Class III (SELV)		
Typical Power Consumption per Segment	3.3W	5W	10W
Typical Power Consumption per Metre	11.2W/Metre	16.8W/Metre	33.6W/Metre
Light Quality	3-step MacAdam Ellipse, CRI >90, Rf: 92, Rg: 97 / CRI >80, Rf: 84, Rg: 96		
Dimmable	Through DRV-DALIPOINT-1X5A, DRV-DALIPOINT-1X10A-IP or DRV-DIMMERPOINT-1X10A (sold separately)		
Effective Beam Angle (FWHM)	96°		
External Heatsink Required	No		
Ambient Operating Temperature	Ta -40°C to 40°C		
Lumen Maintenance TM21	L90/B50 (20K) = 48,000 hours / L70/B50 (20K) > 120,000 hours		
IP Rating	IP66		
IK Rating	IK08		
Max Continuous Connection Length	Please refer to installation limitations		


POWER & LUMEN OUTPUT

POWER	CCT	P20T WHT	P20T BLK
11W 11.2W / Metre	2700K CRI80	840 lm/m	355 lm/m
	3000K CRI80	947 lm/m	399 lm/m
	4000K CRI80	1,095 lm/m	462 lm/m
	2700K CRI90	714 lm/m	301 lm/m
	3000K CRI90	805 lm/m	339 lm/m
	4000K CRI90	931 lm/m	393 lm/m
POWER	CCT	P20T WHT	P20T BLK
16W 16.8W / Metre	2700K CRI80	1,235 lm/m	521 lm/m
	3000K CRI80	1,392 lm/m	587 lm/m
	4000K CRI80	1,610 lm/m	679 lm/m
	2700K CRI90	1,050 lm/m	443 lm/m
	3000K CRI90	1,183 lm/m	499 lm/m
	4000K CRI90	1,368 lm/m	577 lm/m
POWER	CCT	P20T WHT	P20T BLK
33W 33.6W / Metre	2700K CRI80	2,416 lm/m	978 lm/m
	3000K CRI80	2,721 lm/m	1,102 lm/m
	4000K CRI80	3,148 lm/m	1,274 lm/m
	2700K CRI90	2,053 lm/m	831 lm/m
	3000K CRI90	2,313 lm/m	936 lm/m
	4000K CRI90	2,676 lm/m	1,083 lm/m


DIMENSIONS

For final strip lengths please refer to the "Product Length" table.


WS • Wire from Side

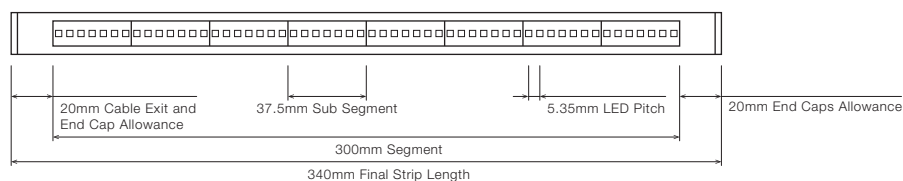


WA • Wire Angled

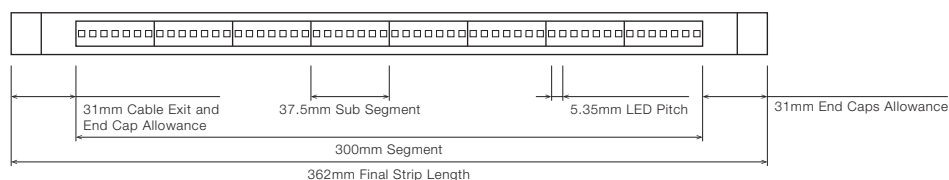


STANDARD PROFILE (WS)




STANDARD PROFILE (WA)



WITH STAINLESS STEEL C-CLIP ¹

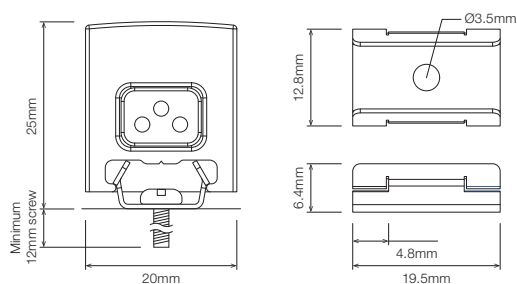

ROTATING MOUNTING BRACKET, TYPE A/B ROTATING CLIP ¹

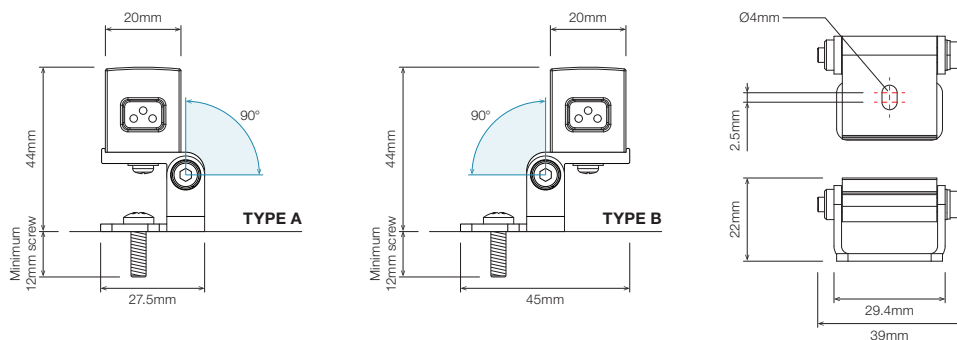

¹ Recommended spacing between Mounting Brackets is maximum 500mm and Mounting Clips is maximum 300mm.

PRODUCT LENGTH (WS)


FULL SEGMENTS	SUB SEGMENTS	WIRE CONFIG.	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
PS0	A1	WS	37.5mm	add 40mm	77.5mm
PS0	A2	WS	75mm	add 40mm	115mm
PS0	A3	WS	112.5mm	add 40mm	152.5mm
PS0	A4	WS	150mm	add 40mm	190mm
PS0	A5	WS	187.5mm	add 40mm	227.5mm
PS0	A6	WS	225mm	add 40mm	265mm
PS0	A7	WS	262.5mm	add 40mm	302.5mm
PS1	A0	WS	300mm	add 40mm	340mm
PS1	A1	WS	337.5mm	add 40mm	377.5mm
PS1	A2	WS	375mm	add 40mm	415mm
PS1	A3	WS	412.5mm	add 40mm	452.5mm
PS1	A4	WS	450mm	add 40mm	490mm
PS1	A5	WS	487.5mm	add 40mm	527.5mm
PS1	A6	WS	525mm	add 40mm	565mm
PS1	A7	WS	562.5mm	add 40mm	602.5mm
PS2	A0	WS	600mm	add 40mm	640mm
PS2	A1	WS	637.5mm	add 40mm	677.5mm
PS2	A2	WS	675mm	add 40mm	715mm
PS2	A3	WS	712.5mm	add 40mm	752.5mm
PS2	A4	WS	750mm	add 40mm	790mm
PS2	A5	WS	787.5mm	add 40mm	827.5mm
PS2	A6	WS	825mm	add 40mm	865mm
PS2	A7	WS	862.5mm	add 40mm	902.5mm
PS3	A0	WS	900mm	add 40mm	940mm
PS3	A1	WS	937.5mm	add 40mm	977.5mm
PS3	A2	WS	975mm	add 40mm	1,015mm
PS3	A3	WS	1,012.5mm	add 40mm	1,052.5mm
PS3	A4	WS	1,050mm	add 40mm	1,090mm
PS3	A5	WS	1,087.5mm	add 40mm	1,127.5mm
PS3	A6	WS	1,125mm	add 40mm	1,165mm
PS3	A7	WS	1,162.5mm	add 40mm	1,202.5mm
PS4	A0	WS	1,200mm	add 40mm	1,240mm
PS4	A1	WS	1,237.5mm	add 40mm	1,277.5mm
PS4	A2	WS	1,275mm	add 40mm	1,315mm
PS4	A3	WS	1,312.5mm	add 40mm	1,352.5mm
PS4	A4	WS	1,350mm	add 40mm	1,390mm
PS4	A5	WS	1,387.5mm	add 40mm	1,427.5mm
PS4	A6	WS	1,425mm	add 40mm	1,465mm
PS4	A7	WS	1,462.5mm	add 40mm	1,502.5mm
PS5	A0	WS	1,500mm	add 40mm	1,540mm

Continued on next page

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.

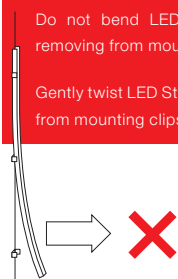


⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.



PRODUCT LENGTH (WS)

(CONTINUED)

FULL SEGMENTS	SUB SEGMENTS	WIRE CONFIG.	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
PS5	A1	WS	1,537.5mm	add 40mm	1,577.5mm
PS5	A2	WS	1,575mm	add 40mm	1,615mm
PS5	A3	WS	1,612.5mm	add 40mm	1,652.5mm
PS5	A4	WS	1,650mm	add 40mm	1,690mm
PS5	A5	WS	1,687.5mm	add 40mm	1,727.5mm
PS5	A6	WS	1,725mm	add 40mm	1,765mm
PS5	A7	WS	1,762.5mm	add 40mm	1,802.5mm
PS6	A0	WS	1,800mm	add 40mm	1,840mm
PS6	A1	WS	1,837.5mm	add 40mm	1,877.5mm
PS6	A2	WS	1,875mm	add 40mm	1,915mm
PS6	A3	WS	1,912.5mm	add 40mm	1,952.5mm
PS6	A4	WS	1,950mm	add 40mm	1,990mm
PS6	A5	WS	1,987.5mm	add 40mm	2,027.5mm
PS6	A6	WS	2,025mm	add 40mm	2,065mm
PS6	A7	WS	2,062.5mm	add 40mm	2,102.5mm
PS7	A0	WS	2,100mm	add 40mm	2,140mm
PS7	A1	WS	2,137.5mm	add 40mm	2,177.5mm
PS7	A2	WS	2,175mm	add 40mm	2,215mm
PS7	A3	WS	2,212.5mm	add 40mm	2,252.5mm
PS7	A4	WS	2,250mm	add 40mm	2,290mm
PS7	A5	WS	2,287.5mm	add 40mm	2,327.5mm
PS7	A6	WS	2,325mm	add 40mm	2,365mm
PS7	A7	WS	2,362.5mm	add 40mm	2,402.5mm
PS8	A0	WS	2,400mm	add 40mm	2,440mm
PS8	A1	WS	2,437.5mm	add 40mm	2,477.5mm
PS8	A2	WS	2,475mm	add 40mm	2,515mm
PS8	A3	WS	2,512.5mm	add 40mm	2,552.5mm
PS8	A4	WS	2,550mm	add 40mm	2,590mm
PS8	A5	WS	2,587.5mm	add 40mm	2,627.5mm
PS8	A6	WS	2,625mm	add 40mm	2,665mm
PS8	A7	WS	2,662.5mm	add 40mm	2,702.5mm
PS9	A0	WS	2,700mm	add 40mm	2,740mm
PS9	A1	WS	2,737.5mm	add 40mm	2,777.5mm
PS9	A2	WS	2,775mm	add 40mm	2,815mm
PS9	A3	WS	2,812.5mm	add 40mm	2,852.5mm
PS9	A4	WS	2,850mm	add 40mm	2,890mm
PS9	A5	WS	2,887.5mm	add 40mm	2,927.5mm
PS9	A6	WS	2,925mm	add 40mm	2,965mm
PS9	A7	WS	2,962.5mm	add 40mm	3,002.5mm


Confirm interstate courier compliance

Custom length subject to availability

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.

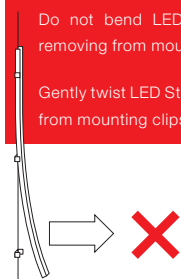


⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.



PRODUCT LENGTH (WA)


FULL SEGMENTS	SUB SEGMENTS	WIRE CONFIG.	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
PS0	A1	WA	37.5mm	add 62mm	99.5mm
PS0	A2	WA	75mm	add 62mm	137mm
PS0	A3	WA	112.5mm	add 62mm	174.5mm
PS0	A4	WA	150mm	add 62mm	212mm
PS0	A5	WA	187.5mm	add 62mm	249.5mm
PS0	A6	WA	225mm	add 62mm	287mm
PS0	A7	WA	262.5mm	add 62mm	324.5mm
PS1	A0	WA	300mm	add 62mm	362mm
PS1	A1	WA	337.5mm	add 62mm	399.5mm
PS1	A2	WA	375mm	add 62mm	437mm
PS1	A3	WA	412.5mm	add 62mm	474.5mm
PS1	A4	WA	450mm	add 62mm	512mm
PS1	A5	WA	487.5mm	add 62mm	549.5mm
PS1	A6	WA	525mm	add 62mm	587mm
PS1	A7	WA	562.5mm	add 62mm	624.5mm
PS2	A0	WA	600mm	add 62mm	662mm
PS2	A1	WA	637.5mm	add 62mm	699.5mm
PS2	A2	WA	675mm	add 62mm	737mm
PS2	A3	WA	712.5mm	add 62mm	774.5mm
PS2	A4	WA	750mm	add 62mm	812mm
PS2	A5	WA	787.5mm	add 62mm	849.5mm
PS2	A6	WA	825mm	add 62mm	887mm
PS2	A7	WA	862.5mm	add 62mm	924.5mm
PS3	A0	WA	900mm	add 62mm	962mm
PS3	A1	WA	937.5mm	add 62mm	999.5mm
PS3	A2	WA	975mm	add 62mm	1,037mm
PS3	A3	WA	1,012.5mm	add 62mm	1,074.5mm
PS3	A4	WA	1,050mm	add 62mm	1,112mm
PS3	A5	WA	1,087.5mm	add 62mm	1,149.5mm
PS3	A6	WA	1,125mm	add 62mm	1,187mm
PS3	A7	WA	1,162.5mm	add 62mm	1,224.5mm
PS4	A0	WA	1,200mm	add 62mm	1,262mm
PS4	A1	WA	1,237.5mm	add 62mm	1,299.5mm
PS4	A2	WA	1,275mm	add 62mm	1,337mm
PS4	A3	WA	1,312.5mm	add 62mm	1,374.5mm
PS4	A4	WA	1,350mm	add 62mm	1,412mm
PS4	A5	WA	1,387.5mm	add 62mm	1,449.5mm
PS4	A6	WA	1,425mm	add 62mm	1,487mm
PS4	A7	WA	1,462.5mm	add 62mm	1,524.5mm
PS5	A0	WA	1,500mm	add 62mm	1,562mm

Continued on next page

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.




⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.

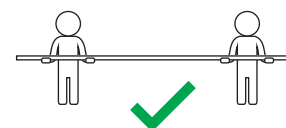

PRODUCT LENGTH (WA)

(CONTINUED)

FULL SEGMENTS	SUB SEGMENTS	WIRE CONFIG.	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
PS5	A1	WA	1,537.5mm	add 62mm	1,599.5mm
PS5	A2	WA	1,575mm	add 62mm	1,637mm
PS5	A3	WA	1,612.5mm	add 62mm	1,674.5mm
PS5	A4	WA	1,650mm	add 62mm	1,712mm
PS5	A5	WA	1,687.5mm	add 62mm	1,749.5mm
PS5	A6	WA	1,725mm	add 62mm	1,787mm
PS5	A7	WA	1,762.5mm	add 62mm	1,824.5mm
PS6	A0	WA	1,800mm	add 62mm	1,862mm
PS6	A1	WA	1,837.5mm	add 62mm	1,899.5mm
PS6	A2	WA	1,875mm	add 62mm	1,937mm
PS6	A3	WA	1,912.5mm	add 62mm	1,974.5mm
PS6	A4	WA	1,950mm	add 62mm	2,012mm
PS6	A5	WA	1,987.5mm	add 62mm	2,049.5mm
PS6	A6	WA	2,025mm	add 62mm	2,087mm
PS6	A7	WA	2,062.5mm	add 62mm	2,124.5mm
PS7	A0	WA	2,100mm	add 62mm	2,162mm
PS7	A1	WA	2,137.5mm	add 62mm	2,199.5mm
PS7	A2	WA	2,175mm	add 62mm	2,237mm
PS7	A3	WA	2,212.5mm	add 62mm	2,274.5mm
PS7	A4	WA	2,250mm	add 62mm	2,312mm
PS7	A5	WA	2,287.5mm	add 62mm	2,349.5mm
PS7	A6	WA	2,325mm	add 62mm	2,387mm
PS7	A7	WA	2,362.5mm	add 62mm	2,424.5mm
PS8	A0	WA	2,400mm	add 62mm	2,462mm
PS8	A1	WA	2,437.5mm	add 62mm	2,499.5mm
PS8	A2	WA	2,475mm	add 62mm	2,537mm
PS8	A3	WA	2,512.5mm	add 62mm	2,574.5mm
PS8	A4	WA	2,550mm	add 62mm	2,612mm
PS8	A5	WA	2,587.5mm	add 62mm	2,649.5mm
PS8	A6	WA	2,625mm	add 62mm	2,687mm
PS8	A7	WA	2,662.5mm	add 62mm	2,724.5mm
PS9	A0	WA	2,700mm	add 62mm	2,762mm
PS9	A1	WA	2,737.5mm	add 62mm	2,799.5mm
PS9	A2	WA	2,775mm	add 62mm	2,837mm
PS9	A3	WA	2,812.5mm	add 62mm	2,874.5mm
PS9	A4	WA	2,850mm	add 62mm	2,912mm
PS9	A5	WA	2,887.5mm	add 62mm	2,949.5mm
PS9	A6	WA	2,925mm	add 62mm	2,987mm
PS9	A7	WA	2,962.5mm	add 62mm	3,024.5mm


Confirm interstate courier compliance

Custom length subject to availability

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.




⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.



■ PROFILE / DIFFUSER

P20T • P20 Profile Diffused

■ PROFILE COLOUR

BLK • Black (Standard)**WHT** • White**CST** • Custom Colour ¹

WIRING CONFIGURATION

CONNECTOR TYPE	DRAWING	MALE	FEMALE
OC2MO Connector 2pin Male Only			
OC2MF Connector 2pin Male + Female			
OC4MO Connector 4pin Male Only			
OC4MF Connector 4pin Male + Female			
FC4MO Flat Connector 2+1 pin Male Only			
FC4MF Flat Connector 2+1 pin Male + Female			
SMPLC Sample Type Connector 2.5mm			

- For detailed information on Outdoor IP67 connector please contact Coolon.
- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.

WIRING COLOUR CODE	
Red	+ VDC
Black	GND

WIRING POSITION

WS - Wire from Side

Ideal for fittings installed individually or vertically.

WA - Wire Angled





IP RATING

IP66

Fully protected against dust.
Protected against wave-like
water jets from all directions.

¹ Custom colours available on request.

■ INSTALLATION LIMITS

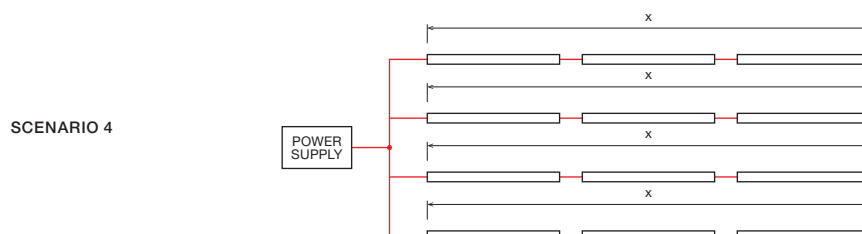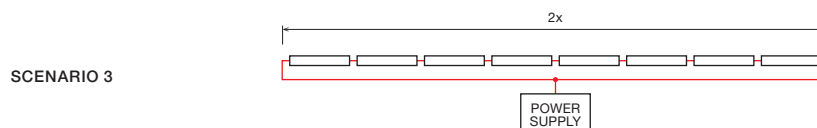

11W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)	CONNECTOR TYPE
9,000 mm	With outdoor 2 pin connectors (OC2MO / OC2MF)
14,000 mm	With outdoor 4 pin connectors (OC4MO / OC4MF)

- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.

16W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)	CONNECTOR TYPE
6,000 mm	With outdoor 2 pin connectors (OC2MO / OC2MF)
9,500 mm	With outdoor 4 pin connectors (OC4MO / OC4MF)

- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.


33W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)	CONNECTOR TYPE
3,000 mm	With outdoor 2 pin connectors (OC2MO / OC2MF)
4,700 mm	With outdoor 4 pin connectors (OC4MO / OC4MF)

- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.


⚠ WARNING

Avoid connecting multiple power supplies into a single circuit, unless they are specifically designed to do so.

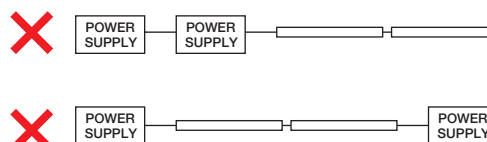

ORDERING EXAMPLE

STR - ALTO IP - 33W - 3.0K - PS2A0 - P20T - WHT - OC2MO - WS - 100 - IP66

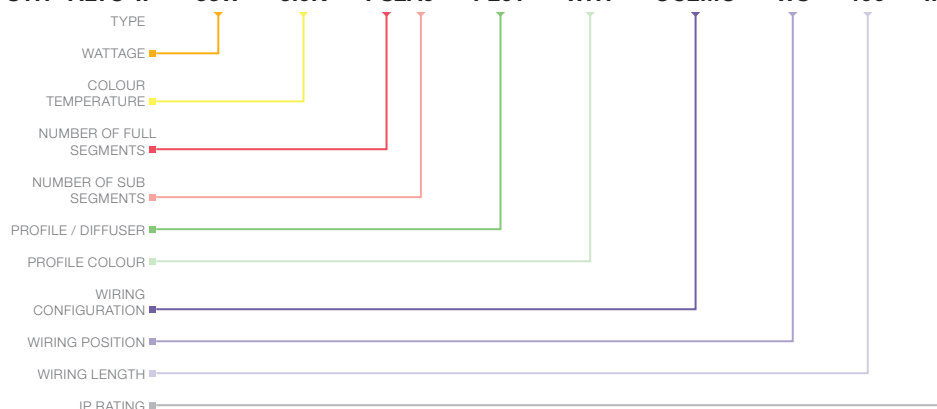

WATTAGE PAGE 04

11W	11.2W per Metre
16W	16.8W per Metre
33W	33.6W per Metre

COLOUR TEMPERATURE ¹ PAGE 04

2.7K	2700K CRI 80
2.7KCRI	2700K CRI 90
3.0K	3000K CRI 80
3.0KCRI	3000K CRI 90
4.0K	4000K CRI 80
4.0KCRI	4000K CRI 90

PRODUCT LENGTH PAGE 06

FULL SEGMENTS	SUB SEGMENTS	
PS0	A0	A0_WA
PS1	A1	A1_WA
PS2	A2	A2_WA
PS3	A3	A3_WA
PS4	A4	A4_WA
PS5	A5	A5_WA
PS6	A6	A6_WA
PS7	A7	A7_WA

PROFILE / DIFFUSER PAGE 08

P20T	P20 Profile Diffused
------	----------------------

PROFILE COLOUR PAGE 08

WHT	White (Standard)
BLK	Black
CST	Custom Colour

WIRING CONFIGURATION PAGE 08

OC2MO	Connector 2 pin Male Only
OC2MF	Connector 2 pin Male + Female
OC4MO	Connector 4 pin Male Only
OC4MF	Connector 4 pin Male + Female
FC4MO	Flat Connector 4 pin Male Only
FC4MF	Flat Connector 4 pin Male + Female
SMPLC	Sample Type Connector 2.5mm

WIRING POSITION PAGE 07

WS	Wire from Side
WA	Wire Angled

WIRING LENGTH PAGE 08


100	100mm
250	250mm

IP RATING PAGE 08


IP66	Outdoor Use
------	-------------


¹ Other CCT subject to availability.

■ ACCESSORIES

	PRODUCT CODE	DESCRIPTION
MOUNTING CLIP ¹		
	MC-CCLIP20	Stainless Steel C-Clip for P20 Profile
	MBR-RB-TA-P20-BLK	Rotating Bracket, TYPE A Rotating Clip - Black
	MBR-RB-TB-P20-BLK	Rotating Bracket, TYPE B Rotating Clip - Black

¹ Recommended spacing between Mounting Brackets is maximum 500mm and Mounting Clips is maximum 300mm.

DRIVER		
	DRV-DALIPPOINT-1X5A	DALI 5 Amps 1 Channel LED Driver
	DRV-DALIPPOINT-IP1X10A	DALI 10 Amps 1 Channel Outdoor LED Driver
	DRV-DIMMERPOINT-1X10A	Rotary Wall-Mount LED Driver
	DRV-RDM-P4	DMX / RDM 4 Channel LED Driver
	DRV-RDM-IP-P4	Outdoor DMX / RDM 4 Channel LED Driver

POWER SUPPLY FOR OUTDOOR USE (IP67)		
	PWR-HLG-60H-42AU	Mean Well Power Supply HLG 60W 42V IP67
	PWR-HLG-150H-42AU	Mean Well Power Supply HLG 150W 42V IP67
	PWR-HLG-240H-42AU	Mean Well Power Supply HLG 240W 42V IP67

CABLE EXTENSIONS		
	CBL-STR-OC2FO-DC-L-IP65-0.1M	0.1m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-OC2FO-DC-L-IP65-0.5M	0.5m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-OC2FO-DC-L-IP65-3M	3m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-OC2FO-DC-L-IP65-5M	5m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-OC4FO-DC-L-IP65-0.1M	0.1m Connector Extension for Strips 2x Red, 2x Black, 0.75mm ² wires
	CBL-STR-OC4FO-DC-L-IP65-0.5M	0.5m Connector Extension for Strips 2x Red, 2x Black, 0.75mm ² wires
	CBL-STR-OC4FO-DC-L-IP65-3M	3m Connector Extension for Strips 2x Red, 2x Black, 0.75mm ² wires
	CBL-STR-OC4FO-DC-L-IP65-5M	5m Connector Extension for Strips 2x Red, 2x Black, 0.75mm ² wires
	CBL-STR/LNR-FC4FO-DC-L-IP65-1M	

■ PHOTOGRAPHY

	LOCATION	LIGHTING PARTNER	PHOTOGRAPHER
Cover Photo	Sydney Bus Shelters	Jadecross	Jackie Chan https://www.jackiechan.com.au/