


FORMA

LED STRIP STR-FORMA

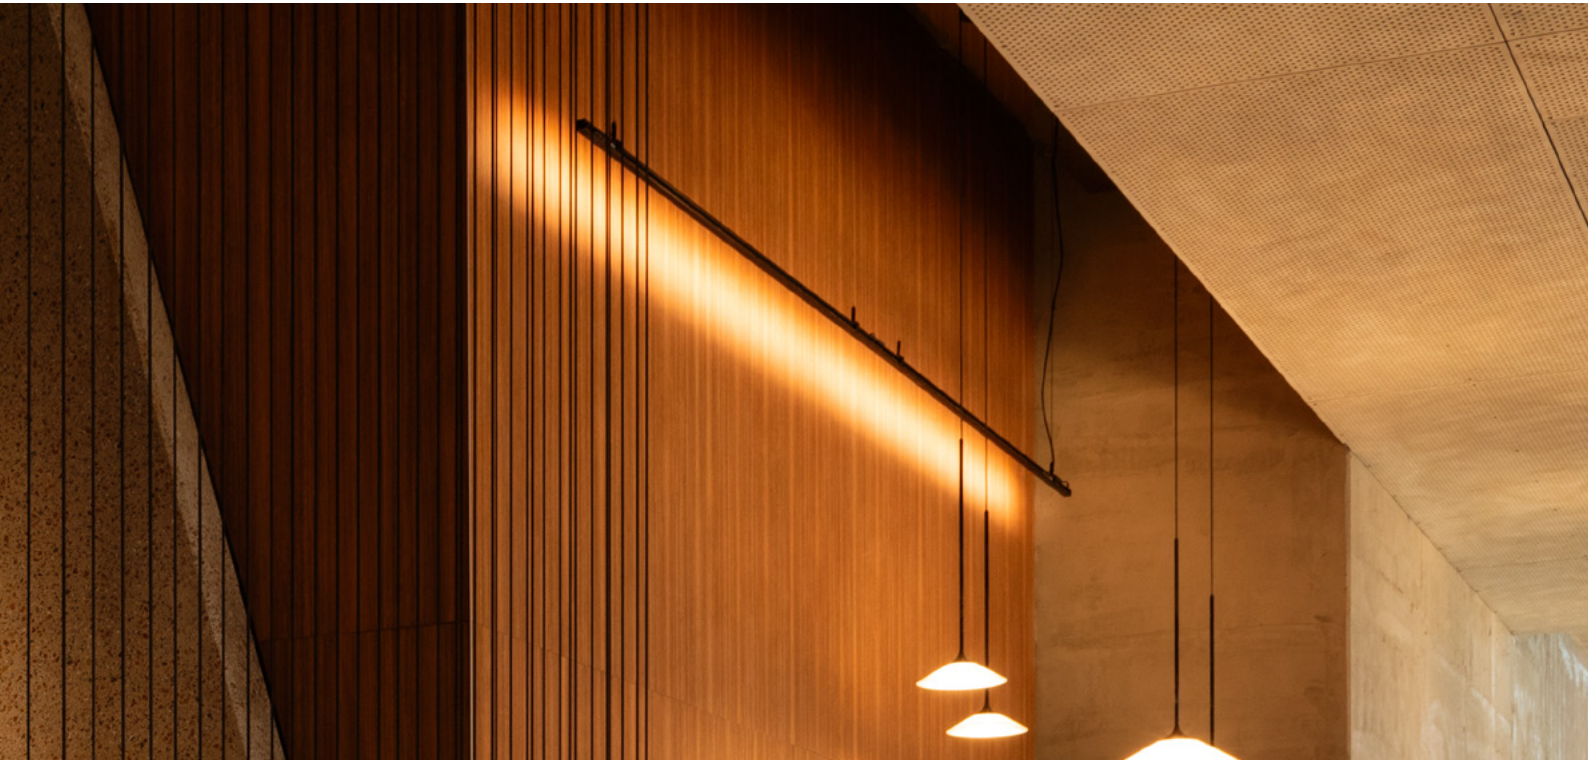

POWER

PROFILE / LUMINOUS FLUX



SD

LL

HL

11W	11.2W / metre	1,000 lm / metre	490 lm / metre	255 lm / metre
16W	16.8W / metre	1,520 lm / metre	710 lm / metre	350 lm / metre
33W	33.6W / metre	2,650 lm / metre	1,330 lm / metre	680 lm / metre

COLOUR TEMPERATURE


2700K

3000K

4000K

DIMENSIONS

SD • Standard Profile



ORDERING EXAMPLE

STR-FORMA 16W 3.0K S2A0 SD WHT LC2MF WB 100 IP40

TYPE	WATTAGE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	WIRING LENGTH	IP RATING
------	---------	-----	----------	--------------------	----------------	----------------	-----------------	---------------	-----------

WATTAGE

11W	11.2W per Metre
16W	16.8W per Metre
33W	33.6W per Metre

COLOUR TEMPERATURE ¹

2.7K	2700K CRI 80
2.7KCRI	2700K CRI 90
3.0K	3000K CRI 80
3.0KCRI	3000K CRI 90
4.0K	4000K CRI 80
4.0KCRI	4000K CRI 90

PRODUCT LENGTH ²

Length as per Site Measurements
Length:
Undefined

DIFFUSER / LOUVRE

SD	No Louvre
LL	Longitudinal Louvre
HL	Honeycomb Louvre

PROFILE COLOUR

BLK	Black (Standard)
WHT	White
CST	Custom Colour ³

WIRING CONFIGURATION

WR2OS	Wire 2 Core One Side
WR2BS	Wire 2 Core Both Sides
OC2MO	Connector 2 pin Male Only
OC2MF	Connector 2 pin Male + Female
LC2MO ⁴	Locking Connector 4 pin Male Only
LC2MF ⁴	Locking Connector 4 pin Male + Female
RC2OS ⁵	Round Cable 2 Core One Side
RC2BS ⁵	Round Cable 2 Core Both Sides
SMPLC	Sample Type Connector 2.5mm

WIRING POSITION

WB	Wire from Back
WS	Wire from Side

WIRING LENGTH

100	100mm
250	250mm
500	500mm
1000	1,000mm

IP RATING

IP40	Indoor Use
------	------------

¹ Other CCT subject to availability.

² Corner configuration only available for 11W and 16W.

³ Custom colours available on request.

⁴ Locking Connectors (LC2MO / LC2MF) only available with Wire from Back (WB) and Suspension Kit.

⁵ Round Cable (RC2OS / RC2BS) only available with Wire from Back (WB).