





MAYA P20

MEDIUM POWER LED STRIP STR-MAYA P20

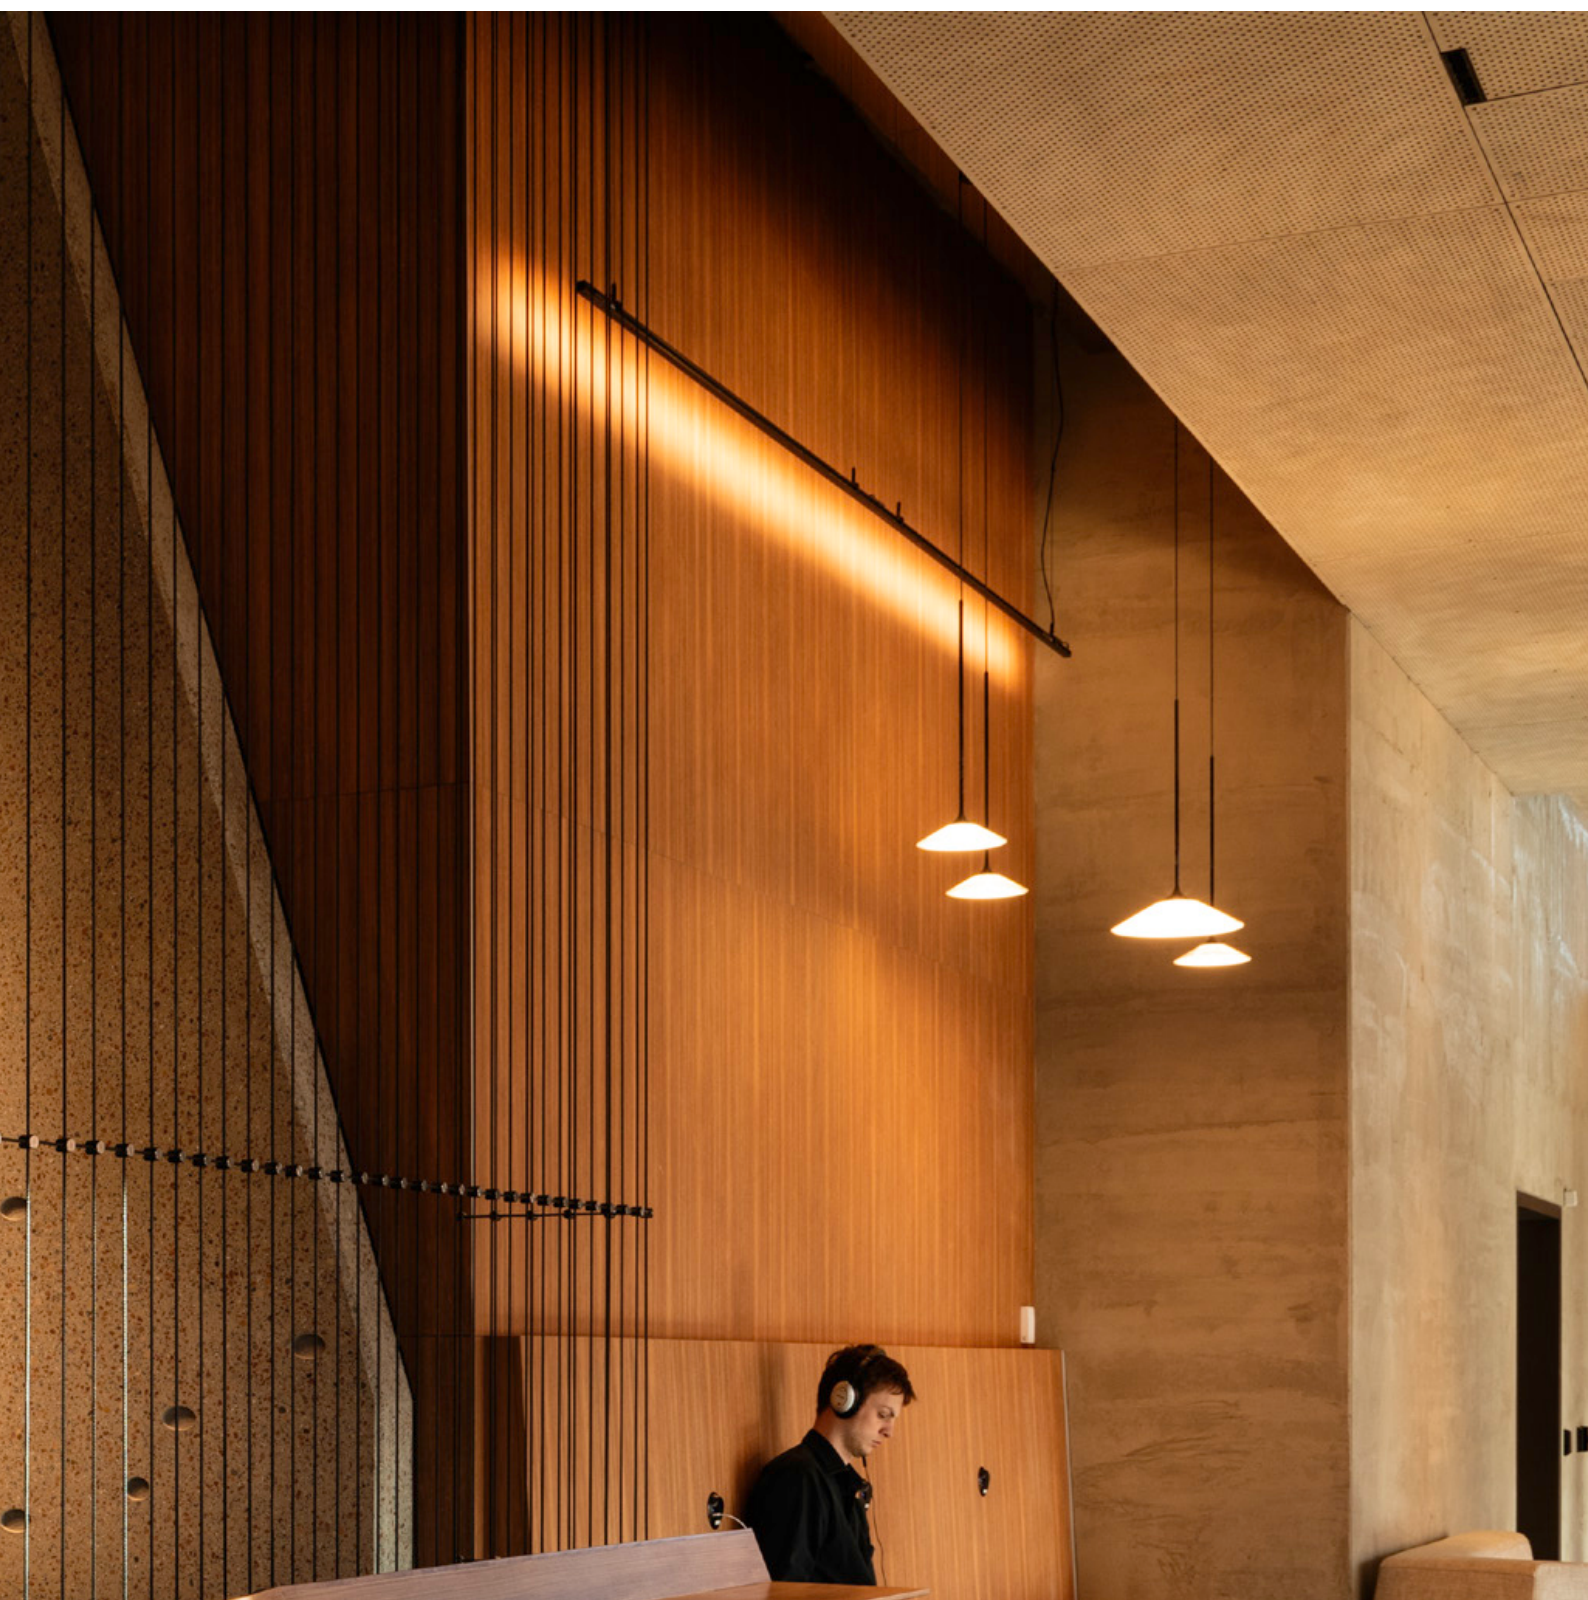

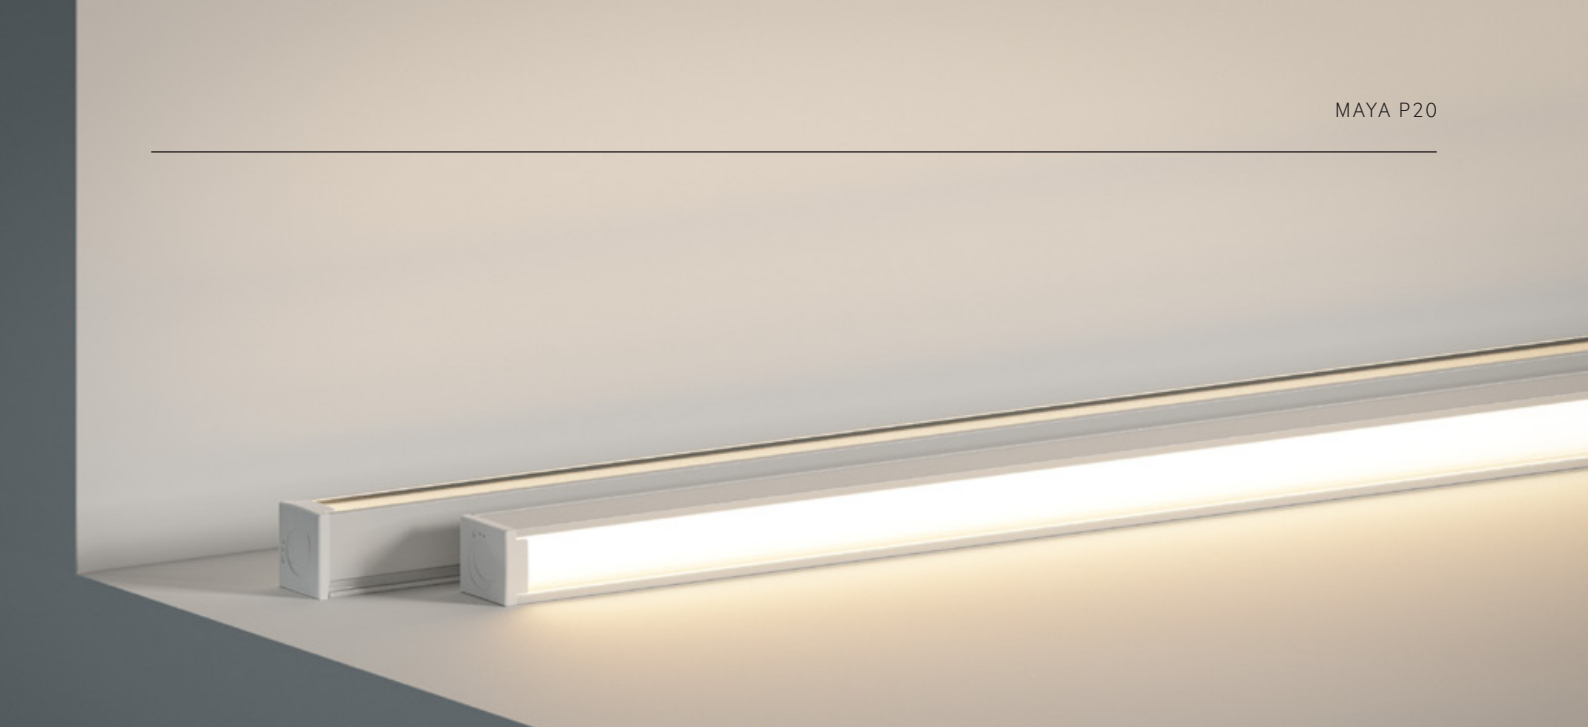

Maya P20 is a LED luminaire perfected for projects that prioritise high-quality illumination, design versatility, and ease of use. With a high CRI dot-free glow, a broad selection of CCTs, and length options divisible every 37.5mm, Maya P20 delivers exceptional visual comfort while offering extensive customisation options.

Maya P20 can be installed as a suspended pendant or a surface mounted fitting, and features a range of glare reduction options along with 90-degree corner options allowing the luminaire to be tailored to create the perfect lighting effect to complement your project.

POWER

10W

9.3W / metre



SD • 368 – 775 lm / metre



LL • 212 – 446 lm / metre



HL • 207 – 436 lm / metre



TD • 289 – 607 lm / metre

20W

18.3W / metre



SD • 683 – 1,437 lm / metre



LL • 393 – 827 lm / metre



HL • 384 – 808 lm / metre



TD • 535 – 1,125 lm / metre

COLOUR TEMPERATURE



CONTROL OPTIONS



A CHOICE OF GLARE CONTROL OPTIONS

The Maya P20 product offers a number of unique glare control and output options.

SD
Recessed Light Engine

HL
Honeycomb Louvre

LD
Longitudinal Louvre

TD
Tall Diffuser 260°

SEAMLESS CORNER OPTIONS

Specially designed corner locks allow for continuous illumination around 90-degree corners. Seamless corner options are available for both suspended and surface mounted fittings, enabling more flexibility to the sleek and minimal design of Maya P20.

L90

LONG OPERATING LIFE

Coolon products use the world's most reputable LED manufacturers and the latest available standards to adequately report lumen maintenance. We strive to drive LEDs under their nominal current and use state-of-the-art heat dissipation methods, leading to durable electronics.



VARIOUS CCT & COLOUR BINNING CONSISTENCY

All products are offered in various colour temperatures, and manufactured using tighter bins, ensuring excellent consistency and uniformity.

5
YEARS

5 YEARS WARRANTY

Coolon luminaires are covered by a solid comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



PROUDLY MADE IN AUSTRALIA

Our products are designed and manufactured in Australia. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested to ensure that it exceeds the highest standards.

• Pictured with Longitudinal Louvre

TECHNICAL SPECIFICATIONS

	10W VERSION	20W VERSION
Part Number	STR-MAYA P20	
Description	Maya P20 Low Power Strip and Pendant	
Segment Length (S)	300mm	
Sub-Segment Length (A)	37.5mm	
Number of Sub-Segments	8	
Segment Width	10.50mm	
LED Pitch	5.35mm	
LEDs Per Segment (S)	56	
LEDs Per Sub Segment (A)	7	
Operating Voltage	24VDC	
Typical Power Consumption per Segment (S)	2.79W	5.49W
Typical Power Consumption per Metre	9.3W/Metre	18.3W/Metre
Light Quality	3-step MacAdam Ellipse, CRI>90, Rf: 93, Rg: 99	
Dimmable	See driver options on last page	
External Heatsink Required	No	
Ambient Operating Temp	Ta -10°C to 40°C	
Lumen Maintenance TM21	L90 / B50 (12K) > 72,000 hours	
IP Rating	IP40	
Max Continuous Connection Length	Please refer to installation limitations	


POWER & LUMEN OUTPUT

		LUMINOUS FLUX (lm / m)						
POWER	PROFILE	FINISH	1800K	2700K	3000K	3500K	4000K	6500K
10W 9.3W / m	SD	WHT	475	661	709	753	762	775
		BLK	368	513	550	585	591	601
	LL	WHT	273	380	408	433	438	446
		BLK	212	295	316	336	340	346
	HL	WHT	267	372	398	423	428	436
		BLK	207	288	309	329	332	338
	TD	WHT	372	518	555	590	597	607
		BLK	289	402	431	458	463	471
POWER		FINISH	1800K	2700K	3000K	3500K	4000K	6500K
20W 18.3W / m	SD	WHT	881	1,226	1,314	1,397	1,413	1,437
		BLK	683	952	1,020	1,084	1,097	1,150
	LL	WHT	507	705	756	804	813	827
		BLK	393	547	587	624	631	641
	HL	WHT	495	689	739	785	794	808
		BLK	384	535	573	609	616	627
	TD	WHT	690	960	1,029	1,094	1,107	1,125
		BLK	535	745	799	849	859	873


DIMENSIONS

For final strip lengths please refer to the "Product Length" table.


P20 STANDARD

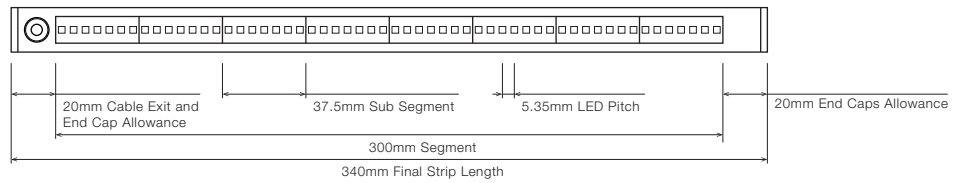


P20 CORNER - CS1A4

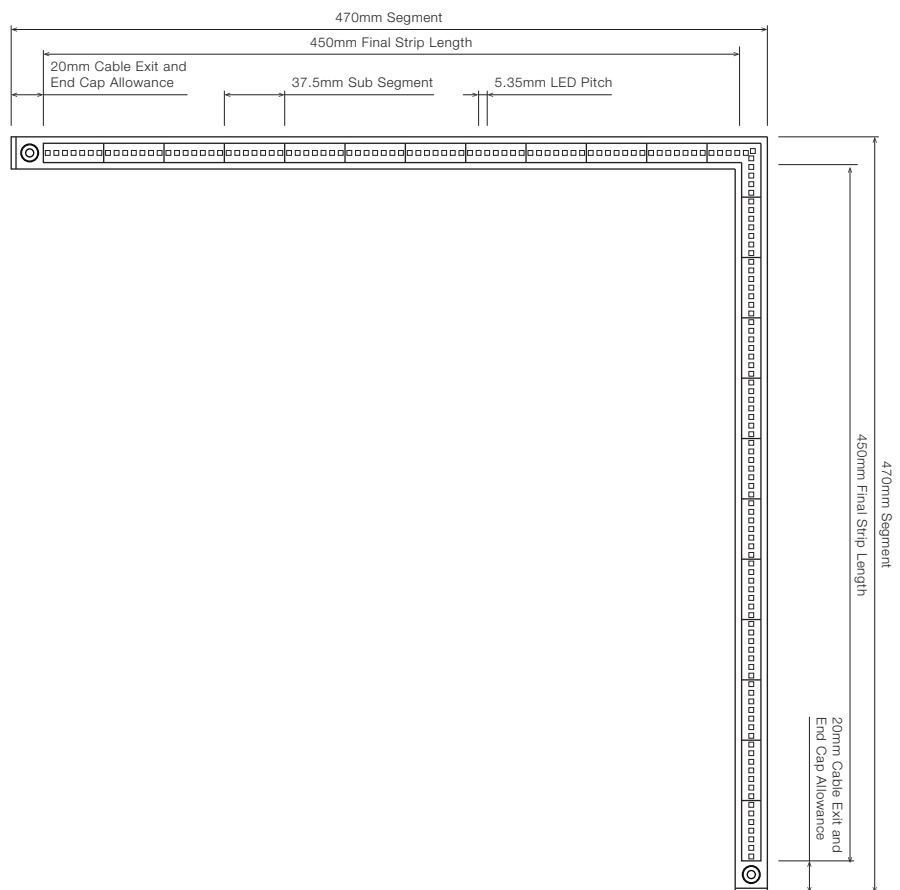

STANDARD PROFILE




TALL PROFILE

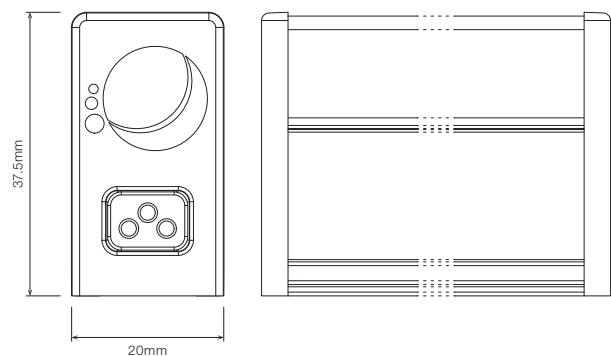


DIMENSIONS

(CONTINUED)


WITH STAINLESS STEEL C-CLIP

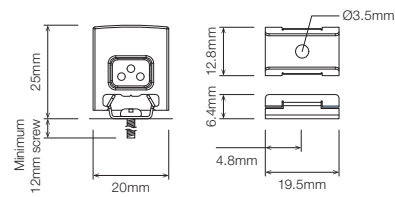


ROTATING MOUNTING BRACKET, TYPE A/B ROTATING CLIP ¹

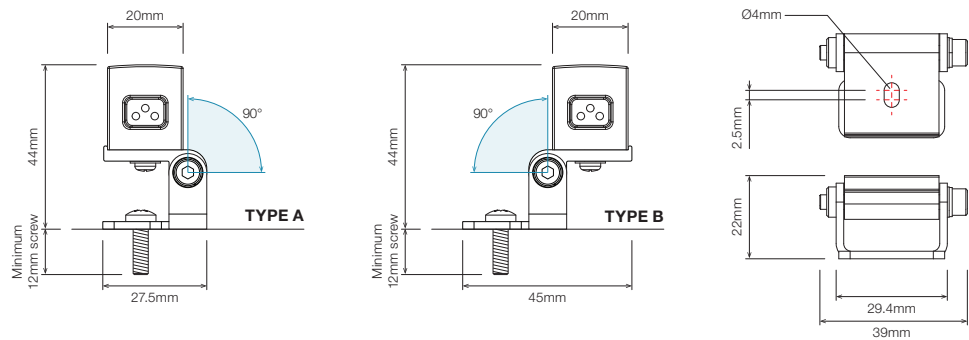


WITH SHORT OUTREACH ADJUSTABLE ARM ¹

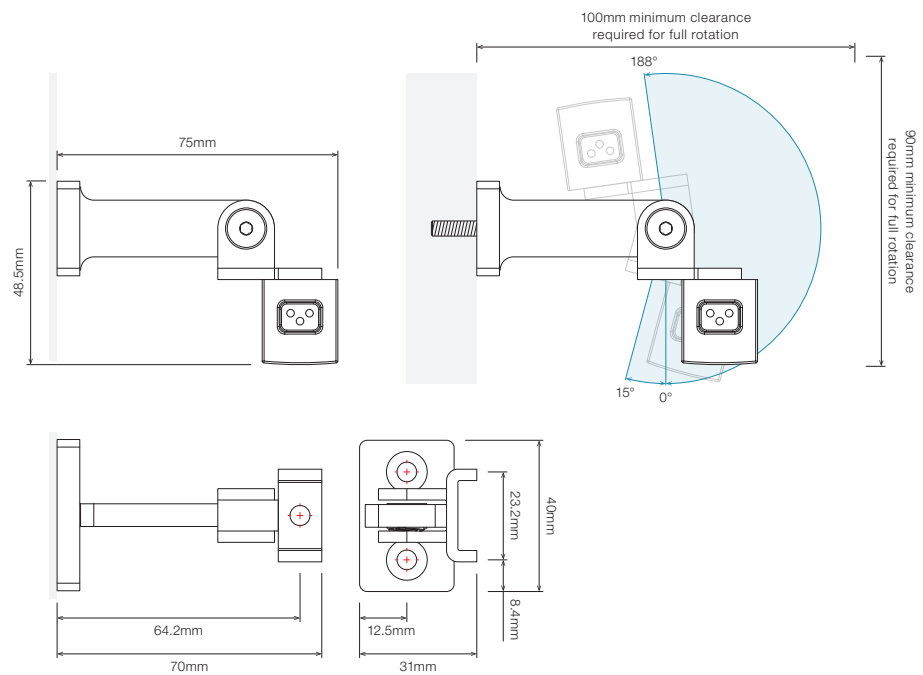

WITH SUSPENSION KIT

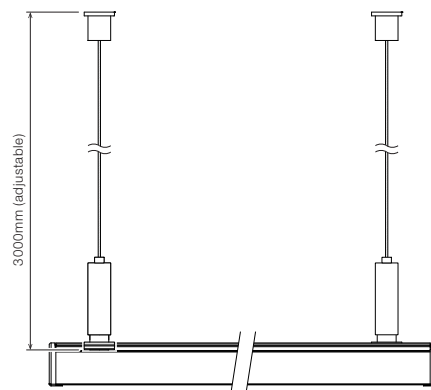

WITH LOCKING CLIP

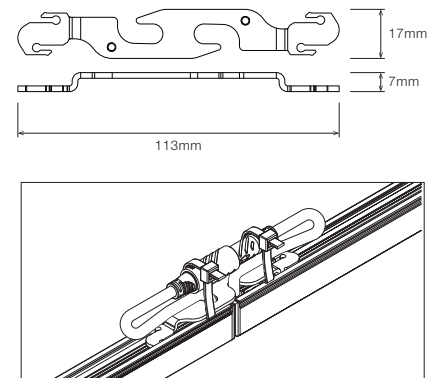

¹ Recommended spacing between Mounting Brackets is maximum 500mm and Mounting Clips is maximum 300mm.

■ PRODUCT LENGTH

CABLE FROM ONE SIDE


FULL SEGMENTS	SUB SEGMENTS	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
S0	A1	37.5mm	add 25mm	62.5mm
S0	A2	75mm	add 25mm	100mm
S0	A3	112.5mm	add 25mm	137.5mm
S0	A4	150mm	add 25mm	175mm
S0	A5	187.5mm	add 25mm	212.5mm
S0	A6	225mm	add 25mm	250mm
S0	A7	262.5mm	add 25mm	287.5mm
S1	A0	300mm	add 25mm	325mm
S1	A1	337.5mm	add 25mm	362.5mm
S1	A2	375mm	add 25mm	400mm
S1	A3	412.5mm	add 25mm	437.5mm
S1	A4	450mm	add 25mm	475mm
S1	A5	487.5mm	add 25mm	512.5mm
S1	A6	525mm	add 25mm	550mm
S1	A7	562.5mm	add 25mm	587.5mm
S2	A0	600mm	add 25mm	625mm
S2	A1	637.5mm	add 25mm	662.5mm
S2	A2	675mm	add 25mm	700mm
S2	A3	712.5mm	add 25mm	737.5mm
S2	A4	750mm	add 25mm	775mm
S2	A5	787.5mm	add 25mm	812.5mm
S2	A6	825mm	add 25mm	850mm
S2	A7	862.5mm	add 25mm	887.5mm
S3	A0	900mm	add 25mm	925mm
S3	A1	937.5mm	add 25mm	962.5mm
S3	A2	975mm	add 25mm	1,000mm
S3	A3	1,012.5mm	add 25mm	1,037.5mm
S3	A4	1,050mm	add 25mm	1,075mm
S3	A5	1,087.5mm	add 25mm	1,112.5mm
S3	A6	1,125mm	add 25mm	1,150mm
S3	A7	1,162.5mm	add 25mm	1,187.5mm
S4	A0	1,200mm	add 25mm	1,225mm
S4	A1	1,237.5mm	add 25mm	1,262.5mm
S4	A2	1,275mm	add 25mm	1,300mm
S4	A3	1,312.5mm	add 25mm	1,337.5mm
S4	A4	1,350mm	add 25mm	1,375mm
S4	A5	1,387.5mm	add 25mm	1,412.5mm
S4	A6	1,425mm	add 25mm	1,450mm
S4	A7	1,462.5mm	add 25mm	1,487.5mm
S5	A0	1,500mm	add 25mm	1,525mm

➤ Continued on next page

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.




⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.



■ PRODUCT LENGTH

(CONTINUED)

CABLE FROM ONE SIDE

FULL SEGMENTS	SUB SEGMENTS	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
S5	A1	1,537.5mm	add 25mm	1,562.5mm
S5	A2	1,575mm	add 25mm	1,600mm
S5	A3	1,612.5mm	add 25mm	1,637.5mm
S5	A4	1,650mm	add 25mm	1,675mm
S5	A5	1,687.5mm	add 25mm	1,712.5mm
S5	A6	1,725mm	add 25mm	1,750mm
S5	A7	1,762.5mm	add 25mm	1,787.5mm
S6	A0	1,800mm	add 25mm	1,825mm
S6	A1	1,837.5mm	add 25mm	1,862.5mm
S6	A2	1,875mm	add 25mm	1,900mm
S6	A3	1,912.5mm	add 25mm	1,937.5mm
S6	A4	1,950mm	add 25mm	1,975mm
S6	A5	1,987.5mm	add 25mm	2,012.5mm
S6	A6	2,025mm	add 25mm	2,050mm
S6	A7	2,062.5mm	add 25mm	2,087.5mm
S7	A0	2,100mm	add 25mm	2,125mm
S7	A1	2,137.5mm	add 25mm	2,162.5mm
S7	A2	2,175mm	add 25mm	2,200mm
S7	A3	2,212.5mm	add 25mm	2,237.5mm
S7	A4	2,250mm	add 25mm	2,275mm
S7	A5	2,287.5mm	add 25mm	2,312.5mm
S7	A6	2,325mm	add 25mm	2,350mm
S7	A7	2,362.5mm	add 25mm	2,387.5mm
S8	A0	2,400mm	add 25mm	2,425mm
S8	A1	2,437.5mm	add 25mm	2,462.5mm
S8	A2	2,475mm	add 25mm	2,500mm
S8	A3	2,512.5mm	add 25mm	2,537.5mm
S8	A4	2,550mm	add 25mm	2,575mm
S8	A5	2,587.5mm	add 25mm	2,612.5mm
S8	A6	2,625mm	add 25mm	2,650mm
S8	A7	2,662.5mm	add 25mm	2,687.5mm
S9	A0	2,700mm	add 25mm	2,725mm
S9	A1	2,737.5mm	add 25mm	2,762.5mm
S9	A2	2,775mm	add 25mm	2,800mm
S9	A3	2,812.5mm	add 25mm	2,837.5mm
S9	A4	2,850mm	add 25mm	2,875mm
S9	A5	2,887.5mm	add 25mm	2,912.5mm
S9	A6	2,925mm	add 25mm	2,950mm
S9	A7	2,962.5mm	add 25mm	2,987.5mm


■ Confirm interstate courier compliance

■ Custom length subject to availability

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.




⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.



■ PRODUCT LENGTH

(CONTINUED)

CABLE FROM BOTH SIDES


FULL SEGMENTS	SUB SEGMENTS	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
S0	A1	37.5mm	add 40mm	77.5mm
S0	A2	75mm	add 40mm	115mm
S0	A3	112.5mm	add 40mm	152.5mm
S0	A4	150mm	add 40mm	190mm
S0	A5	187.5mm	add 40mm	227.5mm
S0	A6	225mm	add 40mm	265mm
S0	A7	262.5mm	add 40mm	302.5mm
S1	A0	300mm	add 40mm	340mm
S1	A1	337.5mm	add 40mm	377.5mm
S1	A2	375mm	add 40mm	415mm
S1	A3	412.5mm	add 40mm	452.5mm
S1	A4	450mm	add 40mm	490mm
S1	A5	487.5mm	add 40mm	527.5mm
S1	A6	525mm	add 40mm	565mm
S1	A7	562.5mm	add 40mm	602.5mm
S2	A0	600mm	add 40mm	640mm
S2	A1	637.5mm	add 40mm	677.5mm
S2	A2	675mm	add 40mm	715mm
S2	A3	712.5mm	add 40mm	752.5mm
S2	A4	750mm	add 40mm	790mm
S2	A5	787.5mm	add 40mm	827.5mm
S2	A6	825mm	add 40mm	865mm
S2	A7	862.5mm	add 40mm	902.5mm
S3	A0	900mm	add 40mm	940mm
S3	A1	937.5mm	add 40mm	977.5mm
S3	A2	975mm	add 40mm	1,015mm
S3	A3	1,012.5mm	add 40mm	1,052.5mm
S3	A4	1,050mm	add 40mm	1,090mm
S3	A5	1,087.5mm	add 40mm	1,127.5mm
S3	A6	1,125mm	add 40mm	1,165mm
S3	A7	1,162.5mm	add 40mm	1,202.5mm
S4	A0	1,200mm	add 40mm	1,240mm
S4	A1	1,237.5mm	add 40mm	1,277.5mm
S4	A2	1,275mm	add 40mm	1,315mm
S4	A3	1,312.5mm	add 40mm	1,352.5mm
S4	A4	1,350mm	add 40mm	1,390mm
S4	A5	1,387.5mm	add 40mm	1,427.5mm
S4	A6	1,425mm	add 40mm	1,465mm
S4	A7	1,462.5mm	add 40mm	1,502.5mm
S5	A0	1,500mm	add 40mm	1,540mm

➤ Continued on next page

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.




⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.

LED Strips must not be bent.



When handling LED Strips, please ensure that they are kept straight.



PRODUCT LENGTH

(CONTINUED)

CABLE FROM BOTH SIDES

FULL SEGMENTS	SUB SEGMENTS	EXACT STRIP LENGTH	END CAP ALLOWANCE	FINAL LENGTH
S5	A1	1,537.5mm	add 40mm	1,577.5mm
S5	A2	1,575mm	add 40mm	1,615mm
S5	A3	1,612.5mm	add 40mm	1,652.5mm
S5	A4	1,650mm	add 40mm	1,690mm
S5	A5	1,687.5mm	add 40mm	1,727.5mm
S5	A6	1,725mm	add 40mm	1,765mm
S5	A7	1,762.5mm	add 40mm	1,802.5mm
S6	A0	1,800mm	add 40mm	1,840mm
S6	A1	1,837.5mm	add 40mm	1,877.5mm
S6	A2	1,875mm	add 40mm	1,915mm
S6	A3	1,912.5mm	add 40mm	1,952.5mm
S6	A4	1,950mm	add 40mm	1,990mm
S6	A5	1,987.5mm	add 40mm	2,027.5mm
S6	A6	2,025mm	add 40mm	2,065mm
S6	A7	2,062.5mm	add 40mm	2,102.5mm
S7	A0	2,100mm	add 40mm	2,140mm
S7	A1	2,137.5mm	add 40mm	2,177.5mm
S7	A2	2,175mm	add 40mm	2,215mm
S7	A3	2,212.5mm	add 40mm	2,252.5mm
S7	A4	2,250mm	add 40mm	2,290mm
S7	A5	2,287.5mm	add 40mm	2,327.5mm
S7	A6	2,325mm	add 40mm	2,365mm
S7	A7	2,362.5mm	add 40mm	2,402.5mm
S8	A0	2,400mm	add 40mm	2,440mm
S8	A1	2,437.5mm	add 40mm	2,477.5mm
S8	A2	2,475mm	add 40mm	2,515mm
S8	A3	2,512.5mm	add 40mm	2,552.5mm
S8	A4	2,550mm	add 40mm	2,590mm
S8	A5	2,587.5mm	add 40mm	2,627.5mm
S8	A6	2,625mm	add 40mm	2,665mm
S8	A7	2,662.5mm	add 40mm	2,702.5mm
S9	A0	2,700mm	add 40mm	2,740mm
S9	A1	2,737.5mm	add 40mm	2,777.5mm
S9	A2	2,775mm	add 40mm	2,815mm
S9	A3	2,812.5mm	add 40mm	2,852.5mm
S9	A4	2,850mm	add 40mm	2,890mm
S9	A5	2,887.5mm	add 40mm	2,927.5mm
S9	A6	2,925mm	add 40mm	2,965mm
S9	A7	2,962.5mm	add 40mm	3,002.5mm

P20 CORNER LENGTH

FULL SEGMENTS	SUB SEGMENTS	FINAL LENGTH
CS1	A4	470mm x 470mm


Confirm interstate courier compliance

Custom length subject to availability

⚠ WARNING

Do not bend LED strip when removing from mounting clips.


Gently twist LED Strip to remove from mounting clips.




⚠ WARNING

PLEASE HANDLE LONG LED STRIPS WITH CARE.


LED Strips must not be bent.




When handling LED Strips, please ensure that they are kept straight.



■ DIFFUSER / LOUVRE

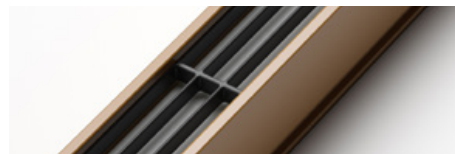SD • No Louvre**LL** • Longitudinal Louvre**HL** • Honeycomb Louvre**TD** • Tall Diffused

■ PROFILE COLOUR

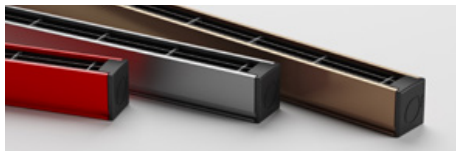BLK • Black (Standard)**WHT** • White**CST** • Custom Colour ¹

¹ Custom colours available on request.

■ WIRING CONFIGURATION

CONNECTOR TYPE	DRAWING	MALE	FEMALE
WR2OS Wire 2 Core One Side			
WR2BS Wire 2 Core Both Sides			
IC2MO Indoor Connector 2pin Male Only			
IC2MF Indoor Connector 2pin Male + Female			
LC2MO ¹ Locking Connector 2pin Male Only			
LC2MF ¹ Locking Connector 2pin Male + Female			
RC2OS Round Cable 2 Core One Side			
RC2BS Round Cable 2 Core Both Sides			
SMPLC Sample Type Connector 2.5mm			

■ For detailed information on Outdoor IP67 connector please contact Coolon.

■ Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.

¹ Locking Connectors (LC2MO / LC2MF) only available with Wire from Back (WB) and Suspension Kit.

WIRING COLOUR CODE	
Red	+ VDC
Black	GND

■ WIRING POSITION

WB - Wire from back



Ideal for fittings installed back-to-back or limited spaces.

Wiring from Back (WB) only available for LC2MO, LC2MF, RC2OS & RC2BS.

WS - Wire from Side



Ideal for fittings installed individually or vertically.

Wiring from Side (WS) only available for WR2OS, WR2BS, OC2MO, OC2MF & SMPLC.


■ IP RATING

IP40


Protected against solid objects greater than 1mm. No protection against liquids.

■ INSTALLATION LIMITS


SCENARIO 1



SCENARIO 2

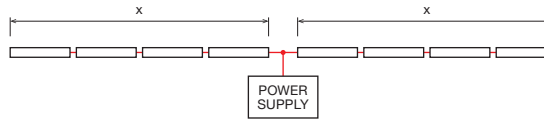

SCENARIO 3

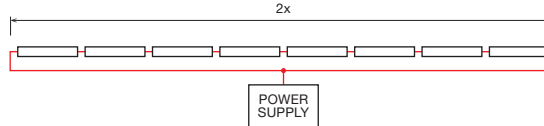

10W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)

CONNECTOR TYPE

13,000 mm	With standard 2 core (WR2OS / WR2BS / RC2OS / RC2BS)
11,000 mm	With standard 2 pin connectors (IC2MO / IC2MF / LC2MO / LC2MF)

- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.

20W VERSION

MAX. CONTINUOUS CONNECTION LENGTH (X)



CONNECTOR TYPE

7,000 mm	With standard 2 core (WR2OS / WR2BS / RC2OS / RC2BS)
5,000 mm	With standard 2 pin connectors (IC2MO / IC2MF / LC2MO / LC2MF)

- Please consult Coolon for details on extension cable between LED fittings, drivers and power supplies.


⚠ WARNING

Avoid connecting multiple power supplies into a single circuit, unless they are specifically designed to do so.



ORDERING EXAMPLE

STR - MAYA P20 - 20W - 3.0KCRI - S2A0 - SD - WHT - LC2MF - WB - 100 - IP40

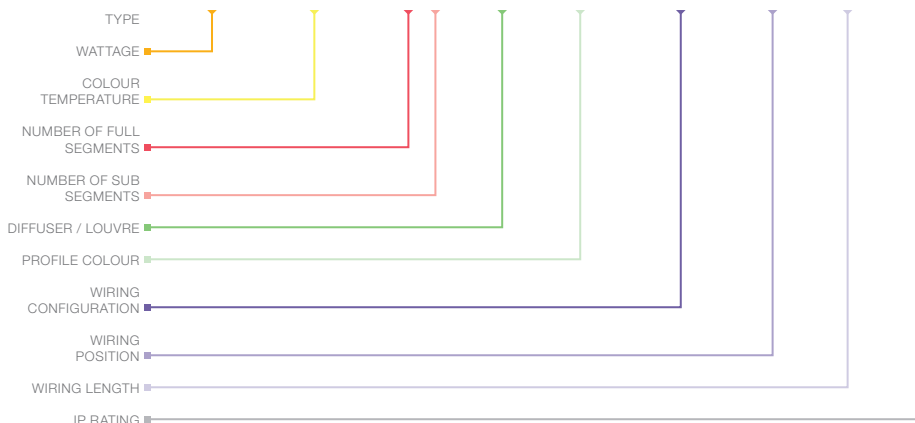

WATTAGE

10W	9.3W per Metre
20W	18.3W per Metre

COLOUR TEMPERATURE ¹

1.8KCRI	1800K CRI 90
2.2KCRI	2200K CRI 90
2.7KCRI	2700K CRI 90
3.0KCRI	3000K CRI 90
3.5KCRI	3500K CRI 90
4.0KCRI	4000K CRI 90
6.5KCRI	6500K CRI 90

PRODUCT LENGTH

FULL SEGMENTS	SUB SEGMENTS
S1	A0
S2	A1
S3	A2
S4	A3
S5	A4
S6	A5
S7	A6
S8	A7
S9	
CORNER LENGTHS	
CS1A4	470mm x 470mm Corner Assembly

DIFFUSER / LOUVRE

SD	No Louvre
LL	Longitudinal Louvre
HL	Honeycomb Louvre
TD	Tall Diffused

PROFILE COLOUR ²

BLK	Black (Standard)
WHT	White
CST	Custom Colour

WIRING CONFIGURATION

WR2OS	Wire 2 Core One Side
WR2BS	Wire 2 Core Both Sides
IC2MO	Indoor Connector 2 pin Male Only
IC2MF	Indoor Connector 2 pin Male + Female
LC2MO ³	Locking Connector 2 pin Male Only
LC2MF ³	Locking Connector 2 pin Male + Female
RC2OS ⁴	Round Cable 2 Core One Side
RC2BS ⁴	Round Cable 2 Core Both Sides
SMPLC	Sample Type Connector 2.5mm

WIRING POSITION

WB	Wire from Back
WS	Wire from Side

WIRING LENGTH

100	100mm
250	250mm
500	500mm
1000	1000mm

IP RATING

IP40	Indoor Use
------	------------


¹ Other CCT subject to availability.

² Custom colours available on request.

³ Locking Connectors (LC2MO / LC2MF) only available with Wire from Back (WB) and Suspension Kit.

⁴ Round Cable (RC2OS / RC2BS) only available with Wire from Back (WB).

■ ACCESSORIES

	PRODUCT CODE	DESCRIPTION
MOUNTING CLIP ¹		
	MC-CCLIP20	Stainless Steel C-Clip for P20 Profile
	MBR-RB-TA-P20-BLK	Rotating Bracket, TYPE A Rotating Clip - Black
	MBR-RB-TB-P20-BLK	Rotating Bracket, TYPE B Rotating Clip - Black
	MBR-STR-ARM-70-SS	Short Outreach Adjustable Arm - Stainless Steel
¹ Recommended spacing between Mounting Clips is maximum 300mm. Recommended spacing between Mounting Brackets is maximum 500mm.		
SUSPENSION KIT ²		
	MSK-STR-SUSKIT_0-1.5M-BLK	Kit for fixtures ranging from 0 – 1.5m (2 wires included)
	MSK-STR-SUSKIT_1.6-2.5M-BLK	Kit for fixtures ranging from 1.6 – 2.5m (3 wires included)
	MSK-STR-SUSKIT_2.6-3.5M-BLK	Kit for fixtures ranging from 2.6 – 3.5m (4 wires included)
² Solid Rod Suspension available on request.		
CONTROLLER		
	DRV-DALIPOINT-1X5A	Coolon DALI 5 Amps 1 Channel LED Driver
	DRV-DALIPOINT CV NEO	Coolon Outdoor DALI to 10 Amps 1 Channel LED Driver
	DRV-OTI DALI 160/220-240/24 1CH G3	Inventronics Outdoor DALI 160W 24V 1 Channel LED PSU + Integrated Driver ³
	DRV-IT D0P 350/100-277/24V/2C P67 G	Inventronics Outdoor DALI 350W 24V 2 Channel LED PSU + Integrated Driver ³
	DRV-OTI DALI 210/220-240/24_4CH_DT6/8_P	Inventronics Outdoor DALI 210W 24V 4 Channel LED PSU + Integrated Driver ³
	DRV-IT-D0P-480W_12-48V_4CH_DALI-2	Inventronics DALI-2 10 Amps 4 Channel LED Driver
	DRV-RDM-P4	Coolon DMX / RDM 4 Channel LED Driver
	DRV-RDM CV NEO	Coolon Outdoor DMX / RDM 4 Channel LED Driver
	CAS-CBU-PWM4	Casambi Bluetooth Controllable 4 Channel LED Driver
	DRV-LC-150W-24VDC-BDW-SC-PRE2	Tridonic Casambi Bluetooth 150W 24V 1 Channel LED PSU + Integrated Driver ⁴
	DRV-OT FIT 150/220-240/24 PC	Inventronics Phase Dimmable 150W 24V 1 Channel LED PSU + Integrated Driver ³
	DRV-DIMMERPOINT-1X10A	Coolon Rotary Wall-Mount LED Driver
³ Various wattages available. ⁴ Can substitute with an Inventronics alternative.		
POWER SUPPLIES		
	PWR-HLG-60H-42AU	Mean Well Power Supply HLG 60W 42V IP67
	PWR-HLG-150H-42AU	Mean Well Power Supply HLG 150W 42V IP67
	PWR-HLG-240H-42AU	Mean Well Power Supply HLG 240W 42V IP67
CABLE EXTENSIONS		
	CBL-STR-WR2-DC-JL-IP40-3M	3m Cable Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-WR2-DC-JL-IP40-5M	5m Cable Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-IC2FO-DC-L-IP65-0.1M	0.1m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-IC2FO-DC-L-IP65-0.25M	0.25m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires
	CBL-STR-IC2FO-DC-L-IP65-0.5M	0.5m Connector Extension for Strips 1x Red, 1x Black, 0.75mm ² wires

■ PHOTOGRAPHY

Cover Photo	LOCATION
	Melbourne Conservatorium of Music, 204 – 234 St Kilda Rd, Southbank VIC 3006
	LIGHTING DESIGN
	Electrolight
	ARCHITECT
	John Wardle Architects
	ELECTRICAL CONTRACTOR
	Prime Electrical
	PHOTOGRAPHY
	Trevor Mein