

ORITRACK

EMERGENCY TRACK LIGHT



ORITRACK EMERGENCY TRACK LIGHT



The OriTrack LED emergency luminaire combines a compact track-mounted design with reliable emergency performance. Compatible with 4-wire, 3-phase tracks, it features selectable maintained/non-maintained operation, a 3-hour emergency runtime and an eco-friendly LiFePO4 battery, making it ideal for retail, hospitality and commercial environments.

PRODUCT INFO

Range	Emergency Light
Model	OriTrack
Operating Mode	Auto Test
Mounting Method	Track Mount
Battery	LiFePO4
Voltage	220-240VAC, 50/60Hz
Power Consumption Standby	6W (Maintained) 3.5W (Non-maintained) 2W (Emergency)

PERFORMANCE SPECIFICATIONS

IP Rating	IP20
IK Rating	IK06
Lumen Output	220 lm
CCT / CRI	5000K / Ra>70
Photometric Classification	C0 D63 C90 D63
Working Temperature	0°C to 45°C


DESIGN SPECIFICATIONS

Weight	0.5 KG
Construction	Poly Carbonate Body
Housing Colour	White or Black Housing

COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS
Warranty	5 Year Warranty

DIMENSIONS (MM)

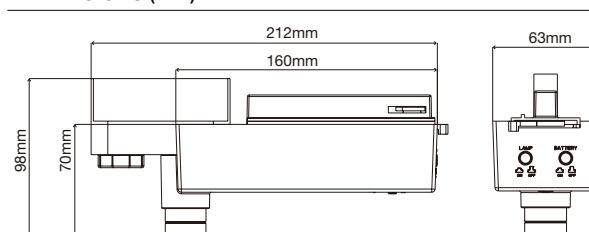

ORDERING EXAMPLE

EMA	OTK	AT	WIDE	WH
EMERGENCY	MODEL	TEST MODE	OPTICS	HOUSING COLOUR
EMA Emergency Light	OTK OriTrack	AT Auto Test	WIDE Wide 140° Optics	WH White Housing
			NARROW Narrow 30° Optics	BK Black Housing
			OVAL Oval Optics	