
COOLON

DESIGNED & MANUFACTURED IN AUSTRALIA




SECONDARY RETENTION DEVICES


Designed as a secondary retention device for industrial luminaires where single-point mounting, elevated installation, or site requirements demand additional mechanical security.

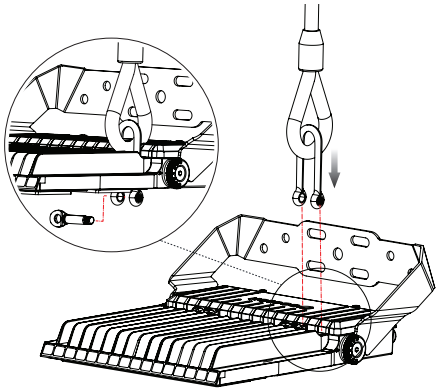

Example: BUTCH

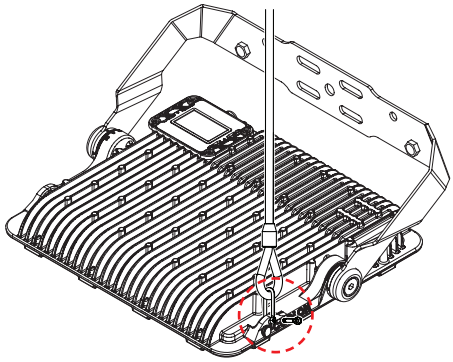


Example: CASSIDY

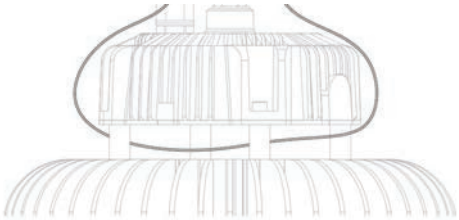

Example: HIGH BAY

SAFETY LANYARD

Enhancing safety during luminaire installation in high-risk environments, this secondary restraint provides dependable backup protection and is comprised of both the lanyard and shackle.

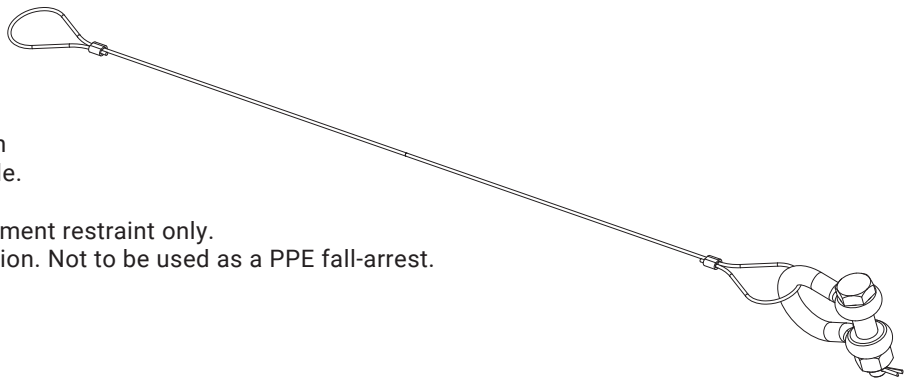

NOTE: Lanyards designed for luminaire or equipment restraint only.
Not to be used as primary load-bearing suspension. Not to be used as a PPE fall-arrest.

Ordering Example

ACC - LANYARD	- SS	- 20	- 1	- B8
PRODUCT	MATERIAL	STATIC LOAD[2]	LENGTH	CONNECTOR TYPE
LANYARD[1] Secondary Retention Device	**SS** Stainless Steel 316	**20** 20kg	**1** 1m	**B8** Bow Shackle
	GAL Galvanised Mild Steel	**50** 50kg	**2** 2m	
			3 3m	

[1] Each lanyard is supplied complete with a shackle for secure attachment.
[2] Maximum steady-state weight safely supported for a drop not exceeding 200mm (8-inch).

COOLON
www.coolon.com.au
sales@coolon.com.au **aus.** 1300 287 533 **intl.** +613 8681 3633 **fax.** +613 9703 2408
All documentation is subject to change without notice. Refer to our website for the latest information.


COOLON

DESIGNED & MANUFACTURED IN AUSTRALIA

SECONDARY RETENTION DEVICES

POLE MOUNT LANYARD ANCHOR POINT BRACKET

Provide a secure and independent pole-mounted anchor point for your safety lanyard. The PMA bracket clamps directly to pipe structures for reliable industrial performance.

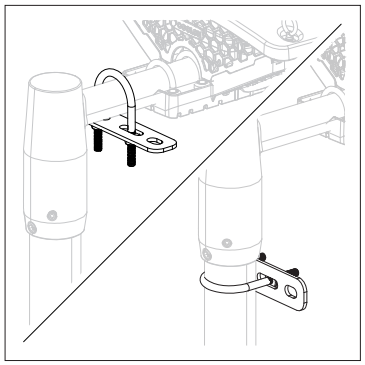


Ordering Example

ACC - PMA	- NB40	- PL180	- GAL
Pole Mount Anchor Bracket	**NB32** fit DN32 pipe **NB40** fit DN40 pipe **NB50** fit DN50 pipe	Mounting Plate	**GAL** Galvanized Steel **SS** Stainless Steel 316

EYEBOLT

Supporting the DLK series, Eyebolt paired with a safety lanyard provides dependable backup protection, increasing installation safety and meeting strict industrial standards in high-risk environments.

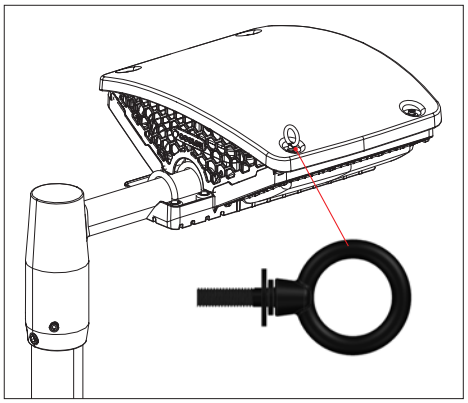


Ordering Example

Suitable for DLK		
ACC - EBM512	**- SS**	**- PTFE**
M5x12 Eyebolt	Stainless Steel	PTFE Black

Suitable for DLK2, DLK2S, DLK3		
ACC - EBM520	**- SS**	**- PTFE**
M5x20 Eyebolt	Stainless Steel	PTFE Black

SHACKLE

When paired with a safety lanyard, the Shackle creates a dependable secondary safety connection.

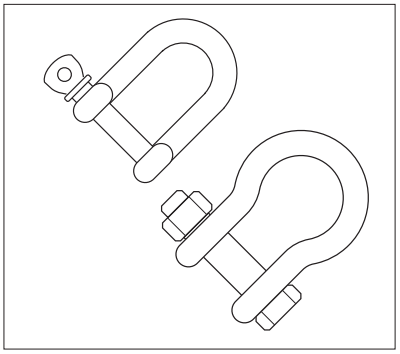

Ordering Example

Suitable for CASSIDY			
ACC - SH - DL	**- 5**	**- SS**
Long D Shackle	5mm	Stainless Steel

ACC - SH - B	**- 8**	**- GAL**
Bow Shackle	8mm	Galvanized Steel

Additional sizes and accessories available. Visit the website for details.

All documentation is subject to change without notice. Refer to our website for the latest information.