



 COOLON

DLK2S / TNR2S

60W LED Conveyor/Area Light

BRILLIANT • CONNECTED

Brilliant Connected Lights

Over many years of flawless performance on mine sites all over Australia, our DLK range has become synonymous with reliability, robustness and quality.

Featuring the superior quality of the preceding ranges, DLK2S offers more value and functionality than ever before. Once powered up, fittings automatically mesh together to form a wireless network across the whole site. Each luminaire continuously detects and reports on any surrounding activity or important environmental changes. The network enables services like hazard identification, real-life asset tracking and personnel locating and provides a digital backbone for invaluable sensor-based data insights. It opens unprecedented possibilities for operations management, providing key insights to boost site safety and productivity.

With a perfect balance between performance, functionality and reliability, the DLK2S is the ultimate luminaire of the future.



 Wirepas

Designed for use in:

- Conveyors
- General Area Lighting
- Pedestrian Access Ways
- Stacker / Reclaimer
- Stairwells
- Tunnels
- Walkways

 DESIGNED &
MANUFACTURED
IN AUSTRALIA





Lowest cost of installation

The DLK2S is so easy to install it can be done in minutes, without the need of any specialized tools. Simply open the hatch, connect the cable, tighten the gland, close the hatch.

The DLK2S is made to cut costs; before it is ever turned on.



Enables digitisation



Lights automatically mesh together forming a site-wide wireless network enabling the effortless deployment of a wide range of IoT based sensors and services from third-party providers:

- Asset Tracking
- Personnel Locating
- Machine Condition Monitoring
- ... and many more!




Lights as a digital backbone

Lights are naturally positioned to provide the best radio coverage - elevated, constantly powered, routinely inspected and present everywhere on site.

Equipped with a smart networking node, DLK2S creates a robust mesh network across the site, regardless of the size or complexity of the infrastructure.


DIMENSIONS / WIRING CONFIGURATION

DLK2S Luminaire

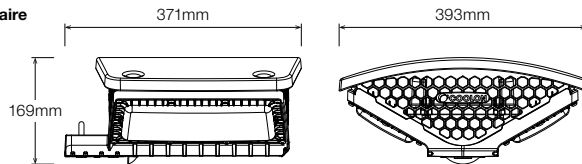


MP Mains Powered
* Cable not included


230VAC MAINS IN*



TNR2S Luminaire

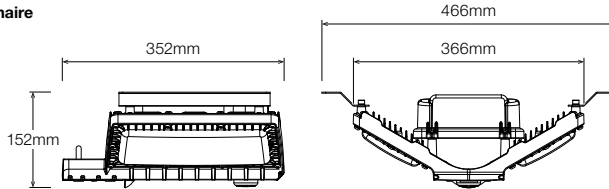


230VAC MAINS IN*




POLAR DISTRIBUTION


Cool White - BW1



Cool White - BW3



Cool White - SY1




— Max Vertical Plane


— Max Horizontal Cone

ISOLUX PLOTS


Cool White - BW1



Cool White - BW3



Cool White - SY1



Lux 1 5 10 20 30 40 50
Mounting Height= 2.7m Arm Length= 0.2m Tilt= 5° LLF= 0.75

TECHNICAL SPECIFICATIONS

| | |
|----------------|---|
| Product | DLK2S / TNR2S LED Conveyor / Area Light |
| Model | DLK2S / TNR2S Mains Powered (MP) |

Optical Characteristics ¹

| | |
|-------------------------------------|--|
| Luminous Flux (Photometered) | 4,526 – 6,180 lm |
| CCT | CWT / WWT / AMB / GRN |
| CRI | >70 excluding amber and green |
| Dimming | 10 – 100% Remote via BitCortex Cloud / Gateway API |

Electrical Characteristics ¹

| | |
|--------------------------|----------------------------|
| Power Consumption | 60W Typical |
| Nominal Voltage | 230VAC |
| Rated Voltage | 120 – 240VAC, 127 – 250VDC |
| Voltage Range | 90 – 305VAC, 127 – 250VDC |
| Frequency Range | 50 / 60Hz |
| Power Factor | >0.95 / 230VAC |
| Leakage Current | <0.75mA / 277VAC |

Wireless Communication

| | |
|-----------------------------------|--------------------------------|
| Protocol | Wirepas |
| Operating Band | 2.4 GHz, 40 Channels |
| Typical Range ² | 15 – 30 metres line of sight |
| Data Encryption | AES-128 |
| Network Standby Time | > 24 hours during power outage |

Sail Area

| | |
|-------------------------------|---------------------|
| Horizontal Orientation | 0.048m ² |
|-------------------------------|---------------------|

Environmental

| | |
|--------------------------------------|---|
| IP Rating | IP66 |
| Impact Rating | IK09 |
| Salt Spray Tested | Yes |
| Operating Temp. Range | 0 to +50°C |
| Thermal Management Type | Active / Continuous |
| Expected Lifespan | 50,000 Hours to 70% Brightness |
| Material Composition (Body) | LM6 Aluminium Alloy (<0.1% copper content) Polyester powder coated |
| Material Composition (Optics) | Polycarbonate |
| Material Composition (Cover) | Polycarbonate |
| Max. Mounting Height | <8m above ground level |
| Mounting/Bracket Type | Spigot Mount OD 32 – 44 mm (NB25 – NB32) |
| Cable Gland | M20 x 1.5 SS316 |
| Cable Ø Entry Range | 7 – 13mm |

Battery

| | |
|-------------------------|-------------------------|
| Charge Time | ≤16 hours |
| Battery Type | LiFePO ₄ |
| Battery Lifetime | 2,000 cycles to 70% SOC |

Storage

| | |
|--------------------------------|--------------------------|
| Temperature | 0 to +45°C |
| Shelf Life ³ | Up to 12 months @ 20±5°C |

Weight/Packaging

| | |
|-------------------------------------|-------------------|
| Luminaire Weight | 7kg |
| Packaging Dimensions (DLK2S) | 560 x 470 x 230mm |
| Packaged Weight | 9.4kg |

Compliance (Safety Standards)

| | |
|------------------|---|
| AS/NZS 60598.1 | Luminaires - General Requirements and Tests |
| AS/NZS 60598.2.3 | Luminaires - Particular requirements - For road and street lighting |

Compliance (EMC)

| | |
|----------------|---|
| AS/NZS CISPR15 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment |
| AS/NZS 4268 | Radio equipment and systems - Short range devices - Limits and methods of measurement |

Warranty

| | |
|-----------------|------------------------------|
| Warranty | 5 years warranty as standard |
|-----------------|------------------------------|


¹ Optical and electrical characteristics are measured using Cool White LEDs (CWT). Reading taken while test unit operating in steady state. Ambient temperature during testing is typically 25°C. Individual unit behaviour may differ due to electronic component tolerance and ambient conditions. Product parameters and application suitability shall be checked by the user prior to commissioning.

² Wireless range might significantly vary depending on the type of antennas used, elevation above the ground, presence of metal obstacles and environmental conditions. Wireless coverage could be optimised with increased amount of devices forming mesh network.

³ Shelf life time with Battery Switch in OFF position is defined as time since product dispatch from Coolon, or since last charge cycle.

The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.

MESH NETWORK

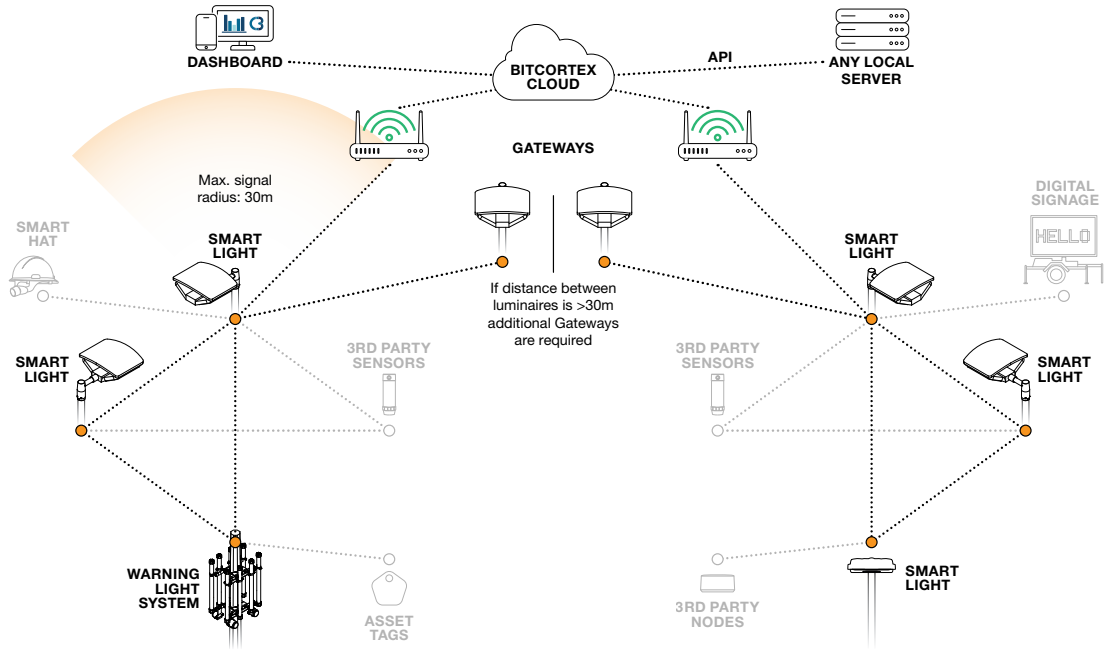

TURTLE FRIENDLY OPTION

In many coastal areas, white light is discouraged as it may disrupt the breeding cycles of sea turtles. The DLK2S is available in turtle friendly Amber (595 nm).



BitCortex

A web based platform to manage and control smart wireless devices. Accessible anywhere through an internet connected browser.

For more information on Coolon smart lighting range please visit: www.bitcortex.net



WIREPAS MASSIVE ENABLED

Wirepas is a leading IoT company on mission to democratise enterprise IoT. The Wirepas Massive self-healing network optimises itself by local decision-making to reach unlimited scalability, coverage and density while using the available radio spectrum as efficiently as possible.

AVAILABLE IN DARK SKY

Lighting pollution is a negative of today's technology, disturbing nocturnal animals, affecting human circadian rhythms and severely impacting astronomy observatories.

The DLK2S is available in Dark Sky in a bid to reduce light pollution.

ORDERING EXAMPLE

DLK2S - 60 - CWT - BW3 - MP

PRODUCT TYPE COLOUR TEMP OPTICS SUPPLY OPTION

| PRODUCT | TYPE | COLOUR TEMP | OPTICS | SUPPLY OPTION | HOOD OPTION |
|---------|--------|----------------|----------------------------|------------------|-------------------------------|
| DLK2S | 60 60W | CWT Cool White | BW1 Batwing Type 1 | MP Mains Powered | DS Dark Sky Hood ¹ |
| TNR2S | | WWT Warm White | BW3 Batwing Type 3 | | |
| | | AMB Amber | SY1 Symmetrical / Diffuser | | |
| | | GRN Green | | | |

¹ Dark Sky Hood (DS) only available for Warm White LEDs (WWT)