



 **COOLON**

BRILLIANT CONNECTED LIGHTS

# WALLABY

**BATTEN LIGHT**  
**30W**

## Industrial lighting has evolved

Wallaby is not only a robust and superior batten light replacement, it is also a giant leap forward towards enabling Industrial IoT across your site.

Built around a wide suite of sensors and an industrial grade of wireless network connectivity, Wallaby lights automatically connect together, forming a wireless mesh network, stretching throughout your whole site.

Installing Wallaby lights is the best way to upgrade lighting and effortlessly digitize the entire site without the need of cabling or engineering.

### Designed for use in:

- Workshops
- Switchboard / Switchrooms
- Pump Rooms
- Car Parks
- Walkways
- Stairwells



 **Wirepas**




**AUSTRALIAN DEVELOPED  
SMART TECHNOLOGY**



## Australian Developed Smart Technology

Designed and developed in Australia, Brilliant Connected Lights (BCL) transform industrial luminaires into a connected IoT network, enabling seamless monitoring, control and integration across complex environments.

Lights automatically mesh to form a site-wide network, supporting the deployment of IoT-based sensors and services such as asset tracking, weather monitoring, machine condition monitoring and more.

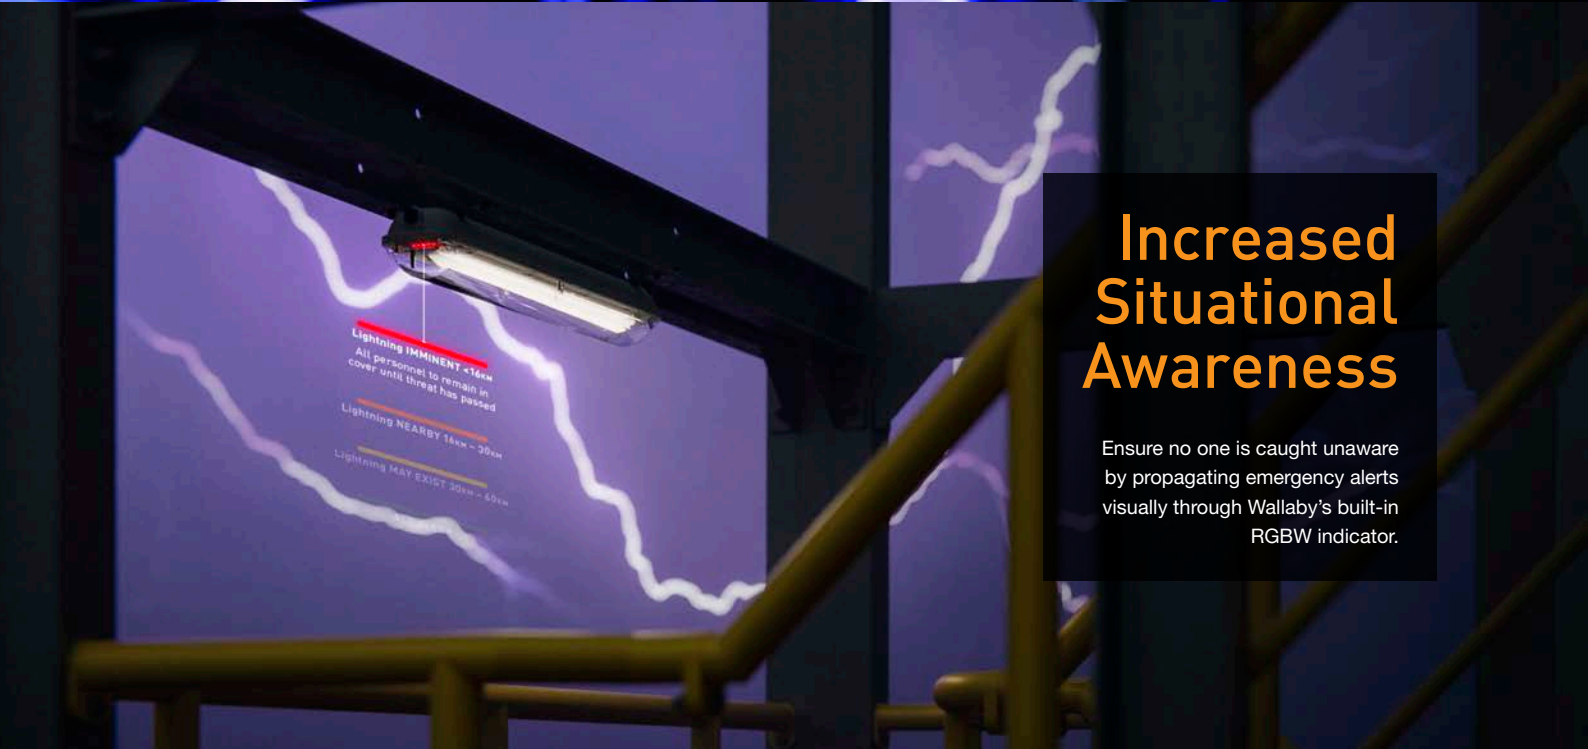

## Increased Situational Awareness


Ensure no one is caught unaware by propagating emergency alerts visually through Wallaby's built-in RGBW indicator.



## Motion-dimming

Fitted with an in-built motion sensor, Wallaby will automatically dim when there are no people in the vicinity and switch on to full power once motion is detected.

## DIMENSIONS

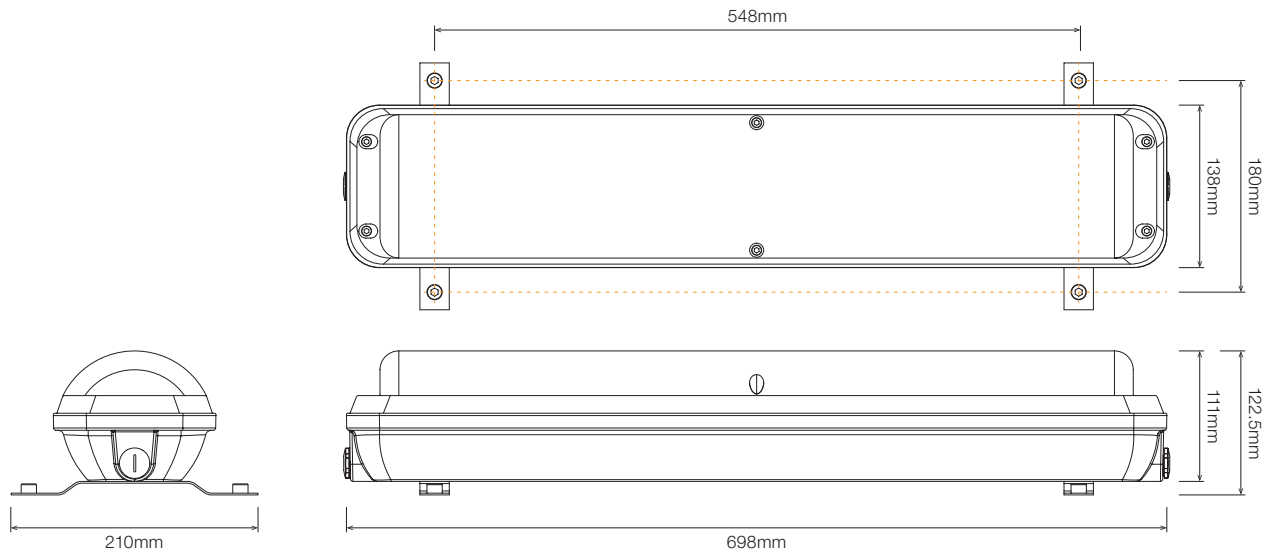

## TECHNICAL SPECIFICATIONS

<b>Product</b>	Wallaby
Model	WLB-30
<b>Optical Characteristics <sup>1</sup></b>	
Luminous Flux (Photometered)	3,100 - 3,500 lm
CCT	AWC (Amber/Warm White/Cool White) <sup>2</sup>
CRI	>80
<b>Electrical Characteristics (Luminaire) <sup>1</sup></b>	
Typical Power Consumption	30W
Max Power Consumption (Cold start)	35W
Nominal Voltage	230VAC
Voltage Range	100 - 277VAC
Frequency Range	50/60 Hz
Power Factor	>0.9 typical @ 230VAC
Cable Diameter Entry	8-12 mm
Conductor Size	1 - 4mm <sup>2</sup> (17-12AWG)
<b>Inrush and Leakage Currents <sup>3</sup></b>	
Peak Inrush Current (A) @ 230V	37.6A
Duration - twidth (ms) @ 10% peak	0.5 ms
I <sup>2</sup> t (A <sup>2</sup> S)	1.41 A <sup>2</sup> s
Leakage Current (mA)	0.75mA max @ 277VAC/60Hz
<b>Maximum number of luminaires per MCB @ 230V <sup>4</sup></b>	
B16	6
C16	10
D16	21
<b>Lighting Control <sup>5</sup></b>	
Dimming	15-100%
Motion Detection Behaviour	Dimming level, ON/OFF
RGBW Indicator Mode	Colour, Frequency
Control Modes	Grouping, scheduling
Main Light	ON/OFF
<b>Wireless Communication</b>	
Protocol	Wirepas
Operating Band	2.4 GHz, 40 Channels
Range <sup>6,7</sup>	Up to 50m line of sight
Data Encryption	AES-128

<b>Sensors</b>	
Motion	Microwave radar motion sensor
<b>Environmental</b>	
IP Rating	IP66
Impact Rating	IK09
Salt Spray Tested	Yes
Operating Temp. Range	-20°C to +50°C
Thermal Management Type	Active / Continuous
Expected Lifespan	50,000 hours to 70% Brightness
Material Composition (Body)	Aluminium
Material Composition (Bracket)	Aluminium
Material Composition (Cover)	Polycarbonate
Mounting / Bracket Type	Surface mount
<b>Weight/Packaging</b>	
Luminaire Weight	3.2 kg (plus 0.2kg bracket)
Packaged Weight	4kg
Dimensions	745 x 210 x 125 mm
<b>Compliance (Safety Standards)</b>	
AS/NZS 60598.1	Luminaires - General requirements and Tests
AS/NZS 60598.2.1	Luminaires - Particular requirements - Fixed general purpose luminaires
<b>Compliance (EMC)</b>	
AS/NZS CISPR15	Limits and methods of measurements of radio and disturbance characteristics of electrical lighting and similar equipment
AS/NZS 4268	Radio equipment and systems - short range devices - Limits and methods of measurement
<b>Warranty</b>	
Warranty	5 years warranty as standard

<sup>1</sup> Reading taken while test unit operating in steady state. Ambient temperature during testing is typically 25°C. Individual unit behaviour may differ due to electronic component tolerance and ambient conditions. Product parameters and application suitability shall be checked by the user prior to commissioning. Excludes Amber and Green.

<sup>2</sup> CCT Selectable via integrated mechanical switch.  
<sup>3</sup> Note: At 230VAC input, 25°C cold start, 10% l<sub>p</sub>k-10% l<sub>p</sub>k.


<sup>4</sup> Number of luminaires is subject to relative MCB properties, assuming a 30mA leakage current limit and MCB steady state current load not exceeding 60%, 70% and 80% for the B, C, D type MCB respectively.

<sup>5</sup> Lighting Control via BitCortex. Gateway is required.

<sup>6</sup> Wireless range might significantly vary depending on the type of antennas used, elevation above the ground, presence of metal obstacles and environmental conditions.

<sup>7</sup> Wireless coverage could be optimised with increased number of devices forming mesh network.

## MESH NETWORK

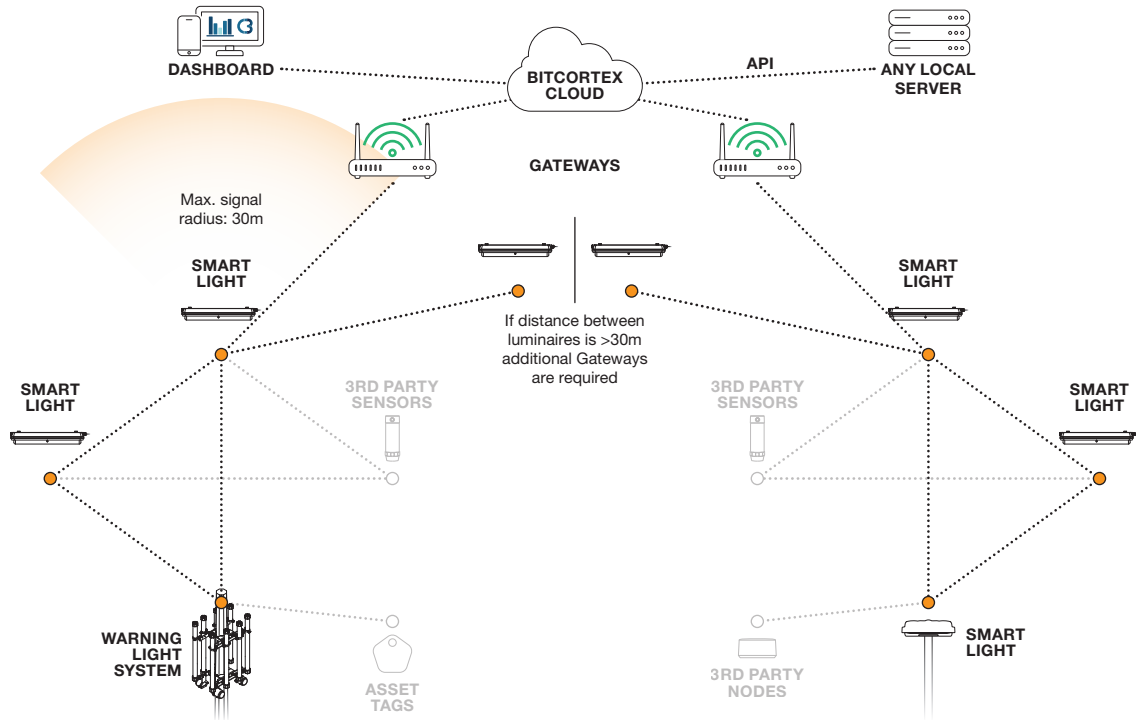

A web based platform to manage and control smart wireless devices. Accessible anywhere through an internet connected browser.

For more information on Coolon smart lighting range please visit: [www.bitcortex.net](http://www.bitcortex.net)



### WIREPAS MASSIVE ENABLED

Wirepas is a leading IoT company on a mission to democratise enterprise IoT. The Wirepas Massive self-healing network optimises itself by local decision-making to reach unlimited scalability, coverage and density while using the available radio spectrum as efficiently as possible.

## ORDERING EXAMPLE

**WLB - B0 - S - 30 - AWC - RGBW - A**

PRODUCT | BATTERY | BODY TYPE | POWER | CCT | INDICATOR | INPUT VOLTAGE

PRODUCT	BATTERY	BODY TYPE	POWER	CCT	INDICATOR	INPUT VOLTAGE
WLB Wallaby	B0 No Battery	S Short	30 30W	AWC Amber / Warm / Cool White	RGBW RGBW Indicator	A 100-277 VAC

### COMING SOON WALLABY 80W LONG

A high-power, long-format Wallaby variant is in development. Designed for extended runs and wider coverage. Full details coming soon.

