

ARIS



LINEAR MEDIUM POWER LNR-ARIS



POWER

PROFILE / LUMINOUS FLUX



SC

33W 33W / metre

1,600 lm / metre

COLOUR TEMPERATURE

2700K

3000K


3200K

4000K

5000K

DIMENSIONS

SC · Standard Profile

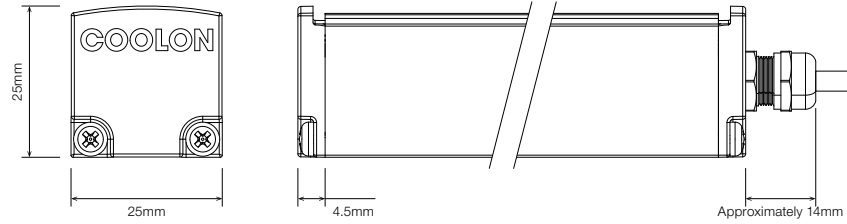

ORDERING EXAMPLE

LNR-ARIS	3.5KCRI	S2	O209	SC	BLK	WR2.1OS	WB	IP40
TYPE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING
■ COLOUR TEMPERATURE								
2.7KCRI	2700K CRI 90							
3.0KCRI	3000K CRI 90							
3.5KCRI	3500K CRI 90							
4.0KCRI	4000K CRI 90							
5.0KCRI	5000K CRI 90							
■ PRODUCT LENGTH								
Length as per Site Measurements								
Length:								
Undefined								
■ OPTICS								
L07	14° Beam							
L25	50° Beam							
F5010	Flare 100° x 20° Beam							
O209	Oval 40° x 18° Beam							
■ PROFILE / DIFFUSER								
SC	Standard Profile Clear							
■ PROFILE COLOUR ¹								
BLK	Black (Standard)							
WHT	White							
CST	Custom Colour							
■ WIRING CONFIGURATION								
WR2.1OS	Wire 2+1 Core One Side							
OC2.2MO	Outdoor Connector 2.2 pin Male Only							
SMPLC.1	Sample Type Connector 2.5mm							
■ WIRING POSITION								
WB	Wire from Back							
WS	Wire from Side							
■ IP RATING								
IP40	Indoor Use							

¹ Custom colours available on request.