

# BEAM




LINEAR BEAM MOUNT LNR-BEAM



## POWER

## PROFILE / LUMINOUS FLUX



SC

SD

**60W** 60W / metre

3,000 lm / metre

## COLOUR TEMPERATURE

2700K

3000K

3200K

4000K

5000K


## DIMENSIONS

Standard Profile

SC • Standard Clear

SD • Standard Diffused

WB • Wire from Back

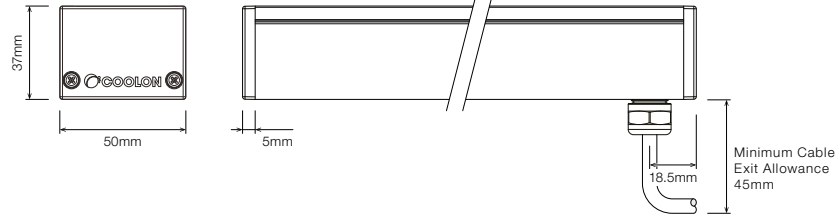

WS • Wire from Side



## ORDERING EXAMPLE

LNR-BEAM	3.0KCRI	S2	O209	SC	BLK	WR2.1OS	WB	IP40
TYPE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING
<b>COLOUR TEMPERATURE</b>								
2.7KCRI	2700K CRI 90							
3.0KCRI	3000K CRI 90							
3.2KCRI	3200K CRI 90							
4.0KCRI	4000K CRI 90							
5.0KCRI	5000K CRI 90							
<b>PRODUCT LENGTH</b>								
Length as per Site Measurements								
Length:								
Undefined								
<b>OPTICS</b>								
L07	14° Beam							
L25	50° Beam							
F5010	Flare 100° x 20° Beam							
O209	Oval 40° x 18° Beam							
NOP	No Optics							
<b>PROFILE / DIFFUSER</b>								
SC	Standard Profile Clear							
SD	Standard Profile Diffused							
<b>PROFILE COLOUR <sup>1</sup></b>								
BLK	Black (Standard)							
WHT	White							
CST	Custom Colour							
<b>WIRING CONFIGURATION</b>								
WR2.1OS	Wire 2+1 Core One Side							
OC2.1MO	Outdoor Connector 2.1 pin Male Only							
SMPLC.1	Sample Type Connector 2.5mm							
<b>WIRING POSITION</b>								
WB	Wire from Back							
WS	Wire from Side							
<b>IP RATING</b>								
IP40	Indoor Use							

<sup>1</sup> Custom colours available on request.