

ELECTRO



LINEAR MEDIUM POWER LNR-ELECTRO



POWER

PROFILE / LUMINOUS FLUX



22W 22W / metre

SD • 1,600 lm / metre

PT • 1,600 lm / metre

40W 40W / metre

SD • 2,000 lm / metre

PT • 2,000 lm / metre

COLOUR TEMPERATURE

2700K

3000K

4000K



sales@coolon.com.au

aus. 1300 287 533

intl. +613 8681 3633

www.coolon.com.au

Version 1.03


All documentation is subject to change without notice. Refer to our website for the latest information.

DIMENSIONS

Standard Profile

SD · Standard Diffused ¹

PT · Polyurethane Translucent ²

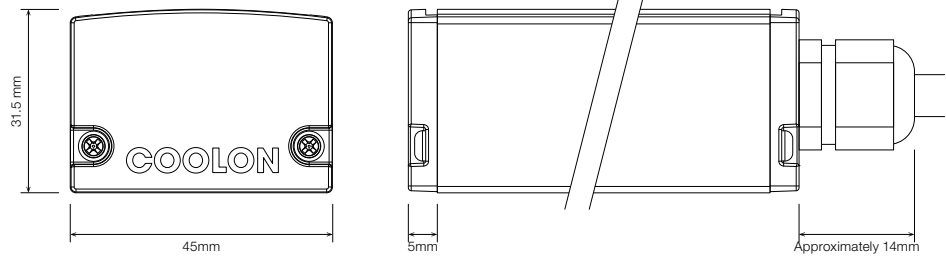

ORDERING EXAMPLE

LNR-ELECTRO	22W	3.0K	S2A1	SD	BLK	WR2OS	WB	IP40
TYPE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING LENGTH	IP RATING	
WATTAGE								
22W	22W per metre							
40W	40W per metre							
COLOUR TEMPERATURE								
2.7K	2700K CRI 80							
2.7KCRI	2700K CRI 90							
3.0K	3000K CRI 80							
3.0KCRI	3000K CRI 90							
4.0K	4000K CRI 80							
4.0KCRI	4000K CRI 90							
PRODUCT LENGTH								
Length as per Site Measurements								
Length:								
Undefined								
DIFFUSER								
SD	Standard Diffused ¹							
PT	Polyurethane Translucent ²							
PROFILE COLOUR								
BLK	Black (Standard)							
WHT	White							
BNA	Brushed Natural Aluminium							
CST	Custom Colour ³							
WIRING CONFIGURATION								
WR2OS	Wire 2 Core One Side							
OC2.1MO	Outdoor Connector 2.1pin Male Only							
SMPLC	Sample Type Connector 2.5mm							
WIRING POSITION								
WB	Wire from Back							
WS	Wire from Side							
IP RATING								
IP40	Indoor Use							
IP65	Outdoor Use							

¹ Standard Diffuser applicable to IP40 only.

² Polyurethane Translucent applicable to IP65 only.

³ Custom colours available on request.