


FORMA

LED STRIP STR-FORMA

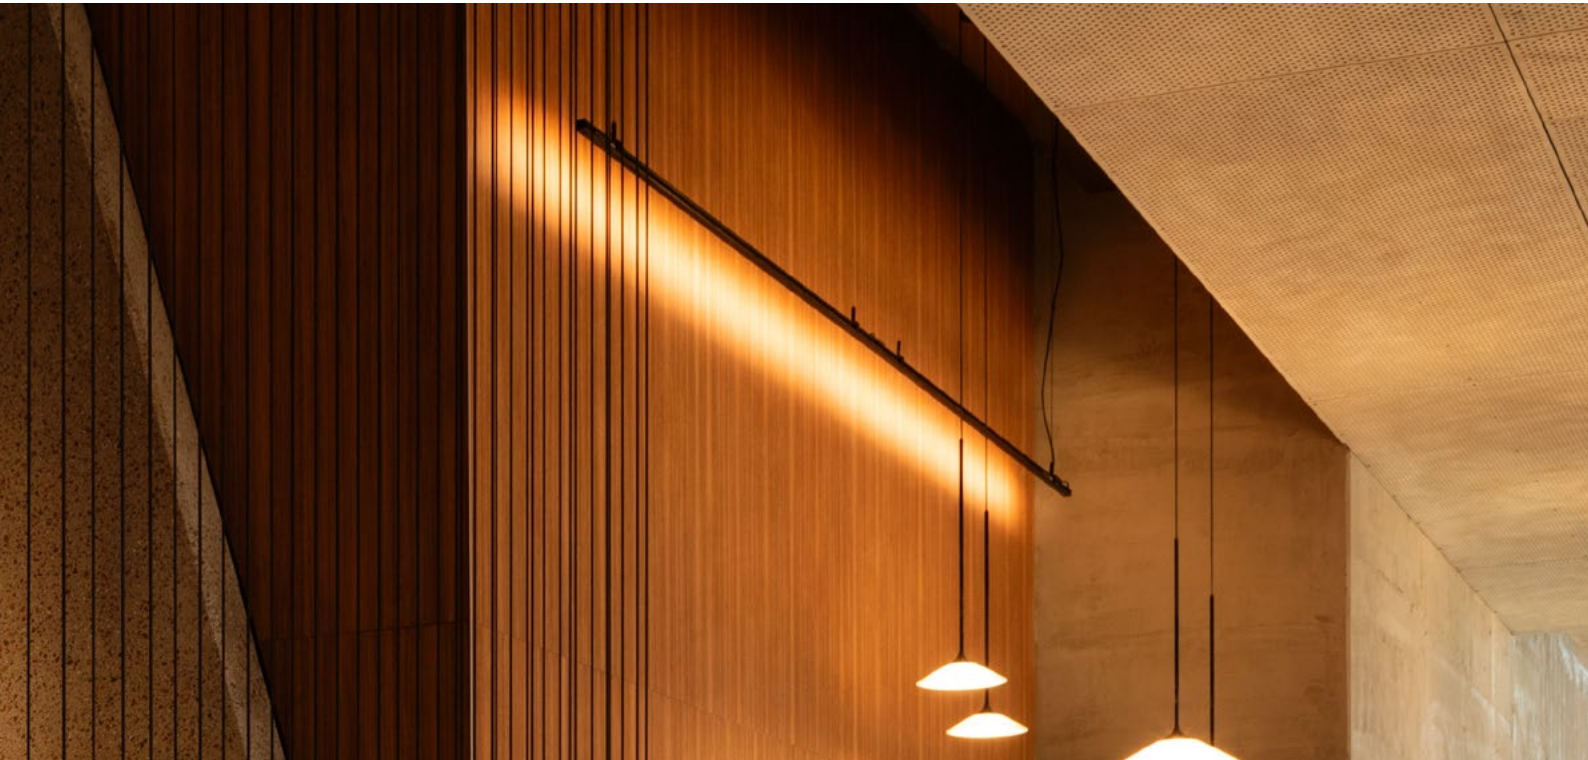

POWER

PROFILE / LUMINOUS FLUX



SD

LD

RD

| | | | | |
|------------|---------------|------------------|------------------|----------------|
| 11W | 11.2W / metre | 1,000 lm / metre | 490 lm / metre | 255 lm / metre |
| 16W | 16.8W / metre | 1,520 lm / metre | 710 lm / metre | 350 lm / metre |
| 33W | 33.6W / metre | 2,650 lm / metre | 1,330 lm / metre | 680 lm / metre |

COLOUR TEMPERATURE


2700K

3000K

4000K

DIMENSIONS

SD • Standard Profile



ORDERING EXAMPLE

STR-FORMA 16W 3.0K S2A0 SD WHT LC2MF WB 100 IP40

TYPE WATTAGE CCT SEGMENTS PROFILE / DIFFUSER PROFILE COLOUR WIRING CONFIG. WIRING POSITION WIRING LENGTH IP RATING

WATTAGE

| | |
|-----|-----------------|
| 11W | 11.2W per Metre |
| 16W | 16.8W per Metre |
| 33W | 33.6W per Metre |

COLOUR TEMPERATURE ¹

| | |
|---------|--------------|
| 2.7K | 2700K CRI 80 |
| 2.7KCRI | 2700K CRI 90 |
| 3.0K | 3000K CRI 80 |
| 3.0KCRI | 3000K CRI 90 |
| 4.0K | 4000K CRI 80 |
| 4.0KCRI | 4000K CRI 90 |

PRODUCT LENGTH ²

Length as per Site Measurements

Length:

Undefined

DIFFUSER / LOUVRE

| | |
|----|---------------------|
| SD | No Louvre |
| LL | Longitudinal Louvre |
| HL | Honeycomb Louvre |

PROFILE COLOUR

| | |
|-----|----------------------------|
| BLK | Black (Standard) |
| WHT | White |
| CST | Custom Colour ³ |

WIRING CONFIGURATION

| | |
|--------------------|---------------------------------------|
| WR2OS | Wire 2 Core One Side |
| WR2BS | Wire 2 Core Both Sides |
| OC2MO | Connector 2 pin Male Only |
| OC2MF | Connector 2 pin Male + Female |
| LC2MO ⁴ | Locking Connector 4 pin Male Only |
| LC2MF ⁴ | Locking Connector 4 pin Male + Female |
| RC2OS ⁵ | Round Cable 2 Core One Side |
| RC2BS ⁵ | Round Cable 2 Core Both Sides |
| SMPLC | Sample Type Connector 2.5mm |

WIRING POSITION

| | |
|----|----------------|
| WB | Wire from Back |
| WS | Wire from Side |

WIRING LENGTH

| | |
|------|---------|
| 100 | 100mm |
| 250 | 250mm |
| 500 | 500mm |
| 1000 | 1,000mm |

IP RATING

| | |
|------|------------|
| IP40 | Indoor Use |
|------|------------|

¹ Other CCT subject to availability.

² Corner configuration only available for 11W and 16W.

³ Custom colours available on request.

⁴ Locking Connectors (LC2MO / LC2MF) only available with Wire from Back (WB) and Suspension Kit.

⁵ Round Cable (RC2OS / RC2BS) only available with Wire from Back (WB).