

# LIVERPOOL

STATIC WHITE LED POLE PLE-LIVERPOOL





Liverpool is a fully illuminated pole-top light column available in four length options and a range of colour temperatures. Featured in award-winning lighting projects, Liverpool transforms and enhances public and architectural spaces through its spectacular display of light and prominent form.

**POWER****LUMINOUS FLUX****56W**

56W / metre


**COLOUR TEMPERATURE**

2700K

3000K

3500K

4000K



# CREATE DISTINCTIVE EFFECTS

Available in a range of heights and colour temperatures, this striking marker light can provide the sculptural effect and atmosphere you choose, punctuating outdoor spaces with a seamless warm glow or pillars of clear white.



## 360° ILLUMINATION

Liverpool is a pole-top light column that provides uniform illumination in 360 degrees. A bold feature alone or arranged in combination, Liverpool is a vibrant beacon that adds presence to urban spaces such as streets, roads and public areas, marking these spaces with a prominent display of light.



### LONG USEFUL OPERATING LIFE

Currently available specification from world's most reputable LED manufacturers states 50,000 hours of continuous operation at the rated current within the operating temperature range to 70% residual light output.



### VARIOUS CCT & COLOUR BINNING CONSISTENCY

Product is offered in various Colour Temperatures using tighter bins.



### 5 YEARS WARRANTY

Coolon Luminaires are covered by a solid comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



### PROUDLY MADE IN AUSTRALIA

Our products are designed and manufactured in Australia. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested to ensure that it exceeds the highest standards.

TECHNICAL SPECIFICATIONS


Part Number	PLE-LIVERPOOL-05	PLE-LIVERPOOL-10	PLE-LIVERPOOL-15	PLE-LIVERPOOL-20
Description	Liverpool Static White Pole-top LED			
Length (Illuminated)	532.5mm	1,020mm	1,522.5mm	2,010mm
Width	105mm	105mm	105mm	105mm
Operating Voltage	24V	24V	24V	24V
Typical Power Consumption	28W	56W	84W	112W
Ambient Operating Temperature	Ta -10 to +50°C			
Avg Lumen Maint. @ Ta 25°C	70% @ 50,000 Hours			
IP Rating	IP65			

IP RATING




Fully protected against dust. Protected against water jets from all directions.

INSTALLATION OPTIONS

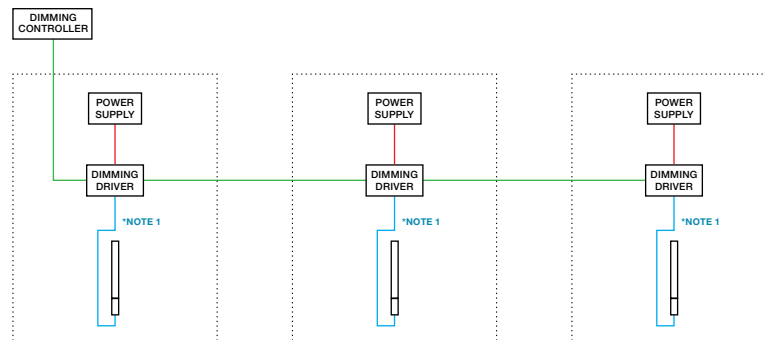


<sup>1</sup> Maximum distance from driver to luminaire is 15,000mm with the provided 2 core AWG14

## ■ DIMENSIONS

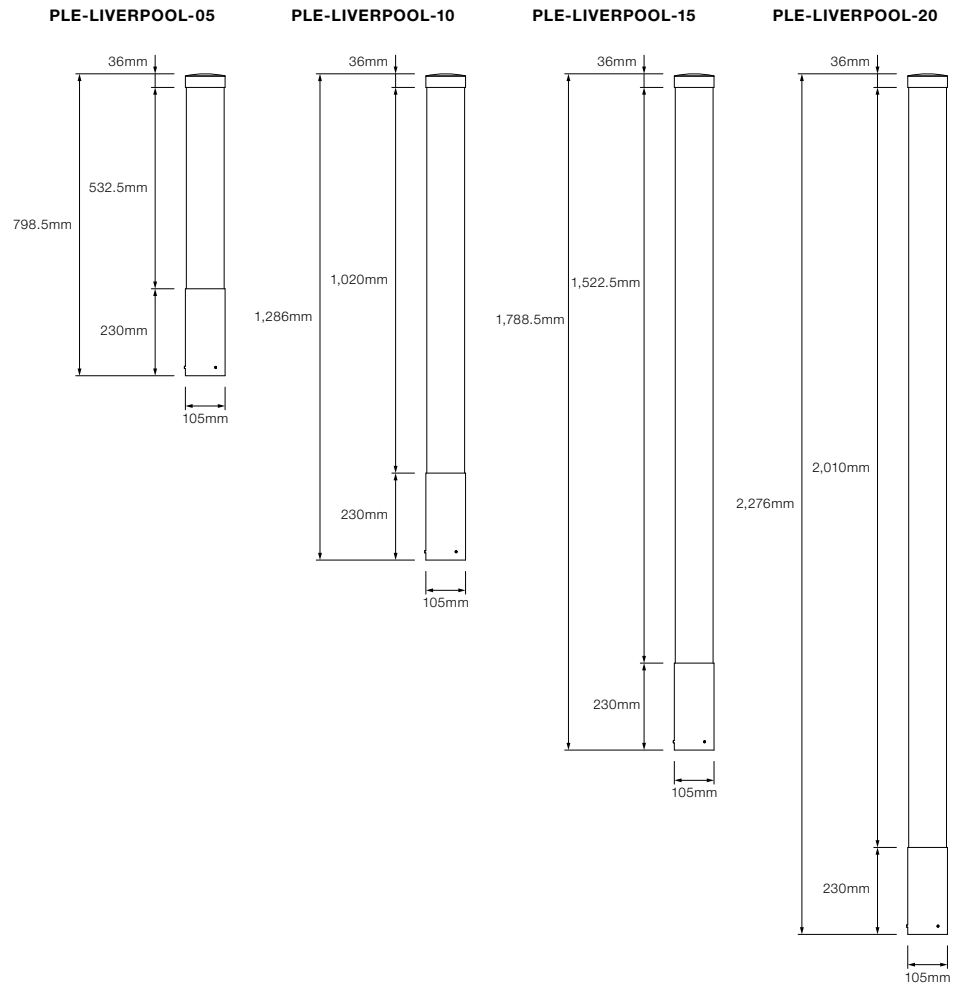

## ORDERING EXAMPLE

### PLE - LIVERPOOL - 10 - GRY - IP65



#### ■ FULL PRODUCT LENGTH PAGE 06

05	798.5mm
10	1,286mm
15	1,788.5mm
20	2,276mm

#### ■ BASE COLOUR PAGE 07

GRY	Grey (Standard)
BLK	Black
WHT	White
CST	Custom Colour *

#### ■ IP RATING PAGE 08

IP65	Outdoor Use
------	-------------

## ACCESSORIES

	PRODUCT CODE	DESCRIPTION
<b>DRIVER</b>		
	DRV-RDM-IP-P4	Outdoor DMX/RDM 4 Channel LED Driver
	DRV-DALIPOINT-IP-1X10A	Outdoor DALI Point 1 Channel Driver 10A
	PWR-OT 130/220-240/24 DIM P	Osram Power Supply OT 130W 220 – 240V 24V DIM P 1 – 10V Dimmable IP66
<b>POWER SUPPLY FOR OUTDOOR USE (IP67)</b>		
	PWR-HLG40-24V	Mean Well Power Supply HLG 40W 24V IP67
	PWR-HLG100-24V	Mean Well Power Supply HLG 100W 24V IP67
	PWR-HLG150-24V	Mean Well Power Supply HLG 150W 24V IP67

\* Custom colours available on request.