




LONSDALE

RGB LED POLE PLE-LONSDALE



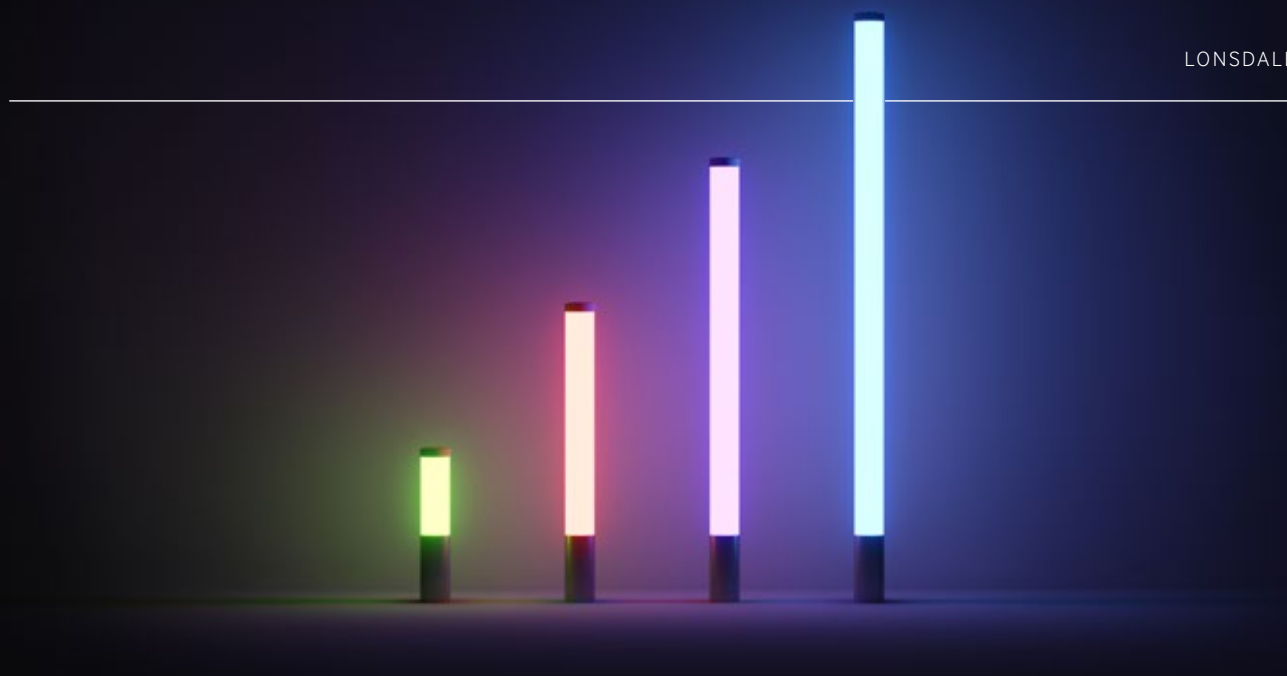

Lonsdale is an RGB illuminated pole top which allows individual addressing via DMX/RDM protocol for maximum customization. The Lonsdale is featured in award winning lighting projects and is able to transform public and architectural spaces with its vibrant and dynamic colours.

POWER**40W**

40W / metre

LUMINOUS FLUX**RGB FULL COLOUR**

RGB COLOUR

The Lonsdale is an RGB pole top light column luminaire that offers a range of dynamic colours enabling the user to create colourful sequences out of a 16.58 million colour range.



360° ILLUMINATION

Lonsdale is a pole-top light column that provides uniform illumination in 360 degrees. A bold feature alone or arranged in combination, Lonsdale is a vibrant colourful beacon that adds presence to urban spaces such as streets, roads and public areas, marking these spaces with a prominent display of light.



LONG USEFUL OPERATING LIFE

Currently available specification from world's most reputable LED manufacturers states 50,000 hours of continuous operation at the rated current within the operating temperature range to 70% residual light output.



VARIOUS CCT & COLOUR BINNING CONSISTENCY

Product is offered in various Colour Temperatures using tighter bins.



5 YEARS WARRANTY

Coolon Luminaires are covered by a solid comprehensive manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



PROUDLY MADE IN AUSTRALIA

Our products are designed and manufactured in Australia. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested to ensure that it exceeds the highest standards.

TECHNICAL SPECIFICATIONS


Part Number	PLE-LONSDALE- RGB-05	PLE-LONSDALE- RGB-10	PLE-LONSDALE- RGB-15	PLE-LONSDALE- RGB-20
Description	Lonsdale RGB Pole-top LED			
Length (Illuminated)	545mm	1,045mm	1,560mm	2,060mm
Width	105mm	105mm	105mm	105mm
Operating Voltage	24V	24V	24V	24V
Typical Power Consumption	20W	40W	60W	80W
Ambient Operating Temperature	Ta -10 to +50°C			
Avg Lumen Maint. @ Ta 25°C	70% @ 50,000 Hours			
IP Rating	IP65			

IP RATING


IP65

Fully protected against dust. Protected against water jets from all directions.

INSTALLATION OPTIONS

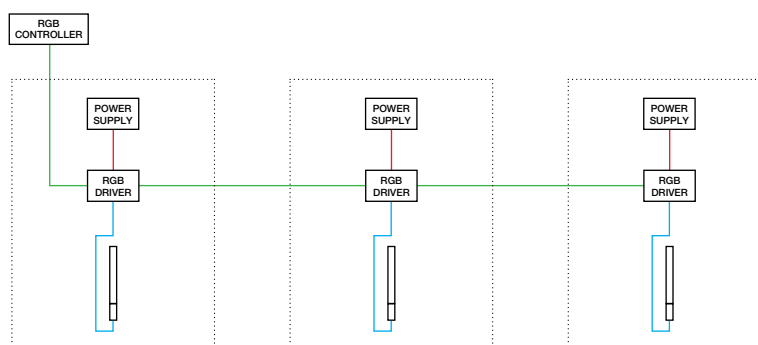

■ DIMENSIONS

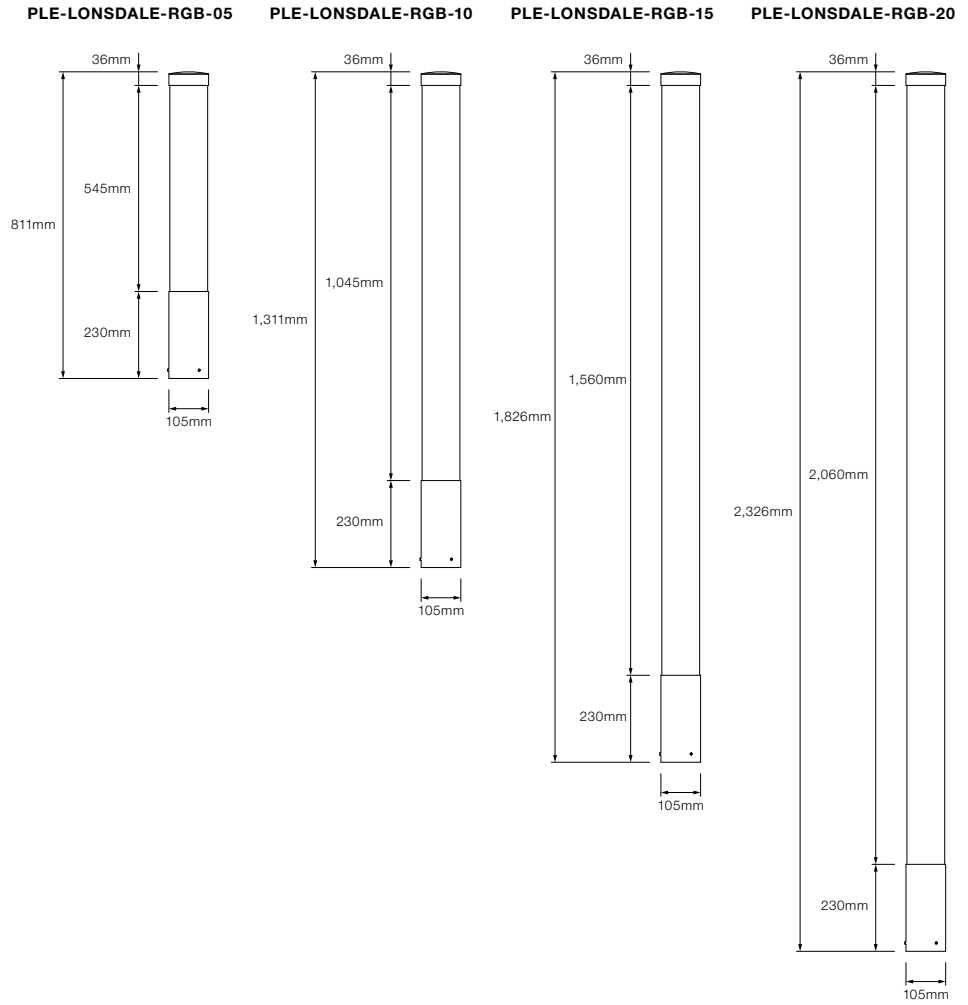

ORDERING EXAMPLE

PLE - LONSDALE - RGB - 10 - GRY - IP65



■ **LED COLOUR** PAGE 04

RGB Red, Green, Blue Spectrum

■ **FULL PRODUCT LENGTH** PAGE 06

05	811mm
10	1,311mm
15	1,826mm
20	2,326mm

■ **BASE COLOUR** PAGE 07

GRY Grey (Standard)

BLK Black



WHT White

CST Custom Colour *

■ **IP RATING** PAGE 08

IP65 Outdoor Use

ACCESSORIES

	PRODUCT CODE	DESCRIPTION
DRIVER		
	DRV-RDM-IP-P4	Outdoor DMX/RDM 4 Channel LED Driver
POWER SUPPLY FOR OUTDOOR USE (IP67)		
	PWR-HLG60-24V	Mean Well Power Supply HLG 60W 24V IP67
	PWR-HLG150-24V	Mean Well Power Supply HLG 150W 24V IP67

* Custom colours available on request.