

# MAX MINI UG




LINEAR MEDIUM POWER LNR-MAX MINI UG



## POWER

## PROFILE / LUMINOUS FLUX



### UG

<b>28W</b>	28W / metre	1,800 lm / metre
<b>40W</b>	39.2W / metre	2,500 lm / metre


## COLOUR TEMPERATURE

2700K

3000K

4000K

## DIMENSIONS

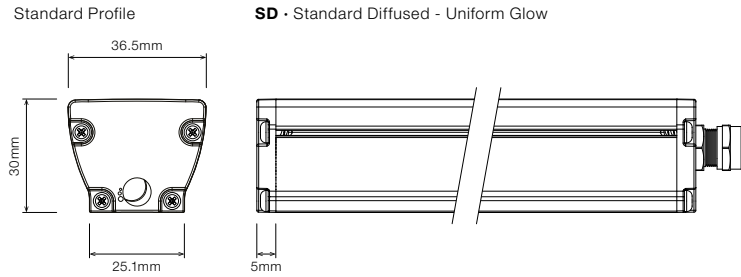

## ORDERING EXAMPLE

LNR-MAX MINI UG		40W	2.7K	S2A0	SD	BLK	WR2OS	WB	IP40
TYPE	WATTAGE	CCT	SEGMENTS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING	
<b>WATTAGE</b>					<b>PROFILE / DIFFUSER</b>				
28W	28W per metre				SD	Standard Diffused - Uniform Glow			
40W	39.2W per metre								
<b>COLOUR TEMPERATURE</b>					<b>PROFILE COLOUR</b>				
2.7K	2700K CRI 80				BLK	Black (Standard)			
2.7KCRI	2700K CRI 90				WHT	White			
3.0K	3000K CRI 80				CST	Custom Colour <sup>1</sup>			
3.0KCRI	3000K CRI 90								
4.0K	4000K CRI 80				<b>WIRING CONFIGURATION</b>				
4.0KCRI	4000K CRI 90				WR2OS	Wire 2 Core One Side			
					OC2.2MO	Outdoor Connector 2.2 pin Male Only			
					SMPLC	Sample Type Connector 2.5mm			
<b>PRODUCT LENGTH</b>					<b>WIRING POSITION</b>				
	Length as per Site Measurements				WB	Wire from Back			
	Length:				WS	Wire from Side			
	Undefined				<b>IP RATING</b>				
					IP40	Indoor Use			

<sup>1</sup> Custom colours available on request.