

MAXIS



LINEAR HIGH POWER PRJ-MAXIS



POWER

PROFILE / LUMINOUS FLUX



SC

60W 60W / metre

3,000 lm / metre

COLOUR TEMPERATURE

2700K

3000K

3200K

4000K



5000K

DIMENSIONS

Standard Profile



SC • Standard Clear

WB • Wire from Back

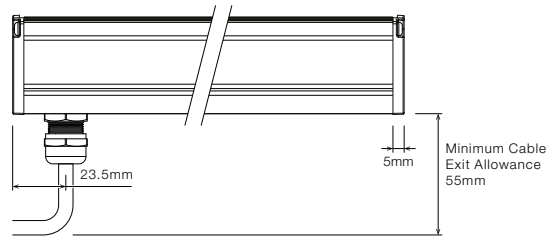

Minimum Cable Exit Allowance 55mm

WS • Wire from Side

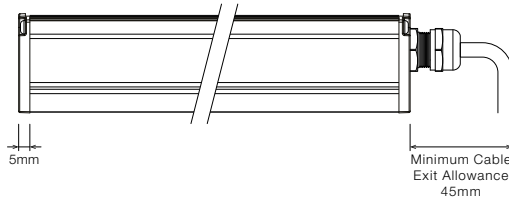

Minimum Cable Exit Allowance 45mm

ORDERING EXAMPLE

PRJ-MAXIS 3.0KCRI S2 O209 SC WHT WR5OS WB IP40

TYPE CCT SEGMENTS OPTICS PROFILE / DIFFUSER PROFILE COLOUR WIRING CONFIG. WIRING POSITION IP RATING

COLOUR TEMPERATURE

2.7KCRI	2700K CRI 90
3.0KCRI	3000K CRI 90
3.2KCRI	3200K CRI 90
4.0KCRI	4000K CRI 90
5.0KCRI	5000K CRI 90

PRODUCT LENGTH

Length as per Site Measurements
Length:
Undefined

OPTICS

L07	14° Beam
L25	50° Beam
F5010	Flare 100° x 20° Beam
O209	Oval 40° x 18° Beam

PROFILE / DIFFUSER

SC	Standard Profile Clear
----	------------------------

PROFILE COLOUR

BLK	Black (Standard)
WHT	White
CST	Custom Colour ¹

WIRING CONFIGURATION

WR2.1OS	Wire 2+1 Core One Side
OC2.1MO	Outdoor Connector 2.1 pin Male Only
SMPLC.1	Sample Type Connector 2.5mm

WIRING POSITION

WB	Wire from Back
WS	Wire from Side

IP RATING

IP40	Indoor Use
------	------------

¹ Custom colours available on request.