

# MIRA



LINEAR HIGH POWER PRJ-MIRA



## POWER

## PROFILE / LUMINOUS FLUX



**SC**

**60W** 60W / metre

3,000 lm / metre

## COLOUR TEMPERATURE

2700K

3000K


3200K

4000K

5000K

## DIMENSIONS

SC - Standard Profile

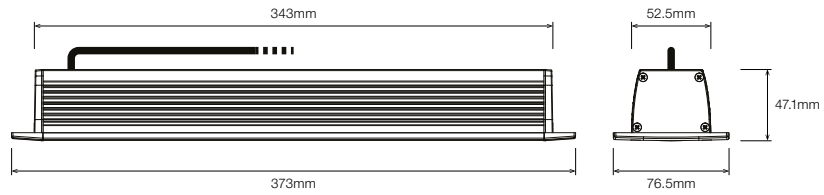

## ORDERING EXAMPLE

PRJ-MIRA	3.0K	S2	O209	SC	BLK	WR2.1OS	WB	IP40
TYPE	CCT	SEGMENTS	OPTICS	PROFILE / DIFFUSER	PROFILE COLOUR	WIRING CONFIG.	WIRING POSITION	IP RATING

### COLOUR TEMPERATURE

2.7K	2700K
3.0K	3000K
3.2K	3200K
4.0K	4000K
5.0K	5000K

### PRODUCT LENGTH

Length as per Site Measurements
Length:
Undefined

### OPTICS

L07	14° Beam
L25	50° Beam
F5010	Flare 100° x 20° Beam
O209	Oval 40° x 18° Beam
NOP	No Optics

### PROFILE / DIFFUSER

SC	Standard Profile Clear
----	------------------------

### PROFILE COLOUR

BLK	Black (Standard)
WHT	White
CST	Custom Colour <sup>1</sup>

### WIRING CONFIGURATION

WR2.1OS	Wire 2+1 Core One Side
OC2.1MO	Outdoor Connector 2.1 pin Male Only
SMPLC.1	Sample Type Connector 2.5mm

### WIRING POSITION

WB	Wire from Back
----	----------------

### IP RATING

IP40	Indoor Use
------	------------

<sup>1</sup> Custom colours available on request.