


GUIDEBLADE EXIT SIGN

EXIT CEILING/WALL MOUNT IP65



GUIDEBLADE EXIT SIGN CEILING/WALL MOUNT IP65

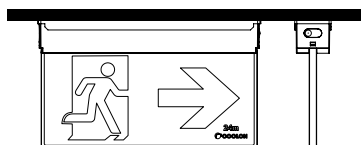

The GuideBlade is a blade-style emergency exit sign designed for architectural integration in commercial interiors, including aquatic centres and pool environments. Its refined housing and double-sided decal deliver a clean, modern presence, while the evenly illuminated diffuser provides clear, consistent visibility at distances up to 24 metres. Featuring maintained operation with integrated auto-test functionality, it offers flexible installation, easy pictogram replacement via external decals, and a buckle-structure design for quick assembly, all while maintaining full compliance with AS/NZS 2293.

PRODUCT INFO

Part Number	EXA-GBL-AT-CM-WH-IP65
Range	Exit Light
Model	GuideBlade
Operating Mode	Auto Test
Mounting Method	Ceiling / Wall Mount
Battery	LiFeP04 6.4V 600mA
Voltage	220-240VAC, 50/60Hz
Power Consumption Standby	2.4W Standby 3.7W Max

PERFORMANCE SPECIFICATIONS

IP Rating	IP65
IK Rating	IK10
LEDs	SMD 2835LED, 6000K/Ra>80
Viewing Distance	24M
Photometric Classification	C0 D2 C90 D2
Working Temperature	0°C to 45°C


DESIGN SPECIFICATIONS

Weight	1.03kg
Construction	Poly Carbonate
Diffuser Material	PMMA Diffuser Blade
Housing Colour	White Housing
Pictograms	Directional Pictograms Supplied

COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS CISPR 15
Warranty	5 Year Warranty

DIMENSIONS (MM)

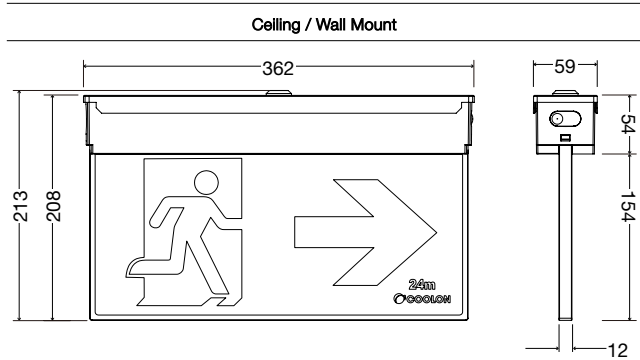

REPLACEMENT PARTS

Replacement Part Numbers	EXA-GSM-AT-CM-WH- Battery
	EXA-GSM-AT-CM-WH-Driver
	EXA-GSM-AT-CM-WH- Diffuser

ORDERING EXAMPLE

EXA	GBL	AT	CM	WH	IP65
EXIT LIGHT	MODEL	TEST MODE	MOUNTING	HOUSING COLOUR	INGRESS PROTECTION
EXA Emergency Light	GBL GuideBlade	AT Auto Test	CM Ceiling Mount	WH White Housing	IP65 Ingress Protection 65