


GUIDEBLADE EXIT SIGN

EXIT CEILING/WALL MOUNT



GUIDEBLADE EXIT SIGN CEILING/WALL MOUNT

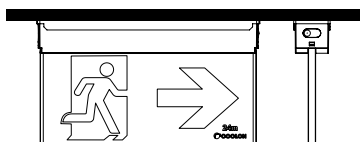

The GuideBlade is a blade-style emergency exit sign designed for architectural integration in commercial interiors, including warehouses and factory environments. Its refined housing and double-sided decal deliver a clean, modern presence, while the evenly illuminated diffuser provides clear, consistent visibility at distances up to 24 metres. Featuring maintained operation with integrated auto-test functionality, it offers flexible installation, easy pictogram replacement via external decals, and a buckle-structure design for quick assembly, all while maintaining full compliance with AS/NZS 2293.

PRODUCT INFO

Part Number	EXA-GBL-AT-CM-WH
Range	Exit Light
Model	GuideBlade
Operating Mode	Auto Test
Mounting Method	Ceiling / Wall Mount
Battery	LiFeP04 6.4V 600mA
Voltage	220-240VAC, 50/60Hz
Power Consumption Standby	2.4W Standby 3.7W Max

PERFORMANCE SPECIFICATIONS

IP Rating	IP20
IK Rating	IK06
LEDs	SMD 2835LED, 6000K/Ra>80
Viewing Distance	24M
Photometric Classification	C0 D2 C90 D2
Working Temperature	0°C to 45°C


DESIGN SPECIFICATIONS

Weight	1.03kg
Construction	Poly Carbonate
Diffuser Material	PMMA Diffuser Blade
Housing Colour	White Housing
Pictograms	Directional Pictograms Supplied

COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS CISPR 15
Warranty	5 Year Warranty

DIMENSIONS (MM)

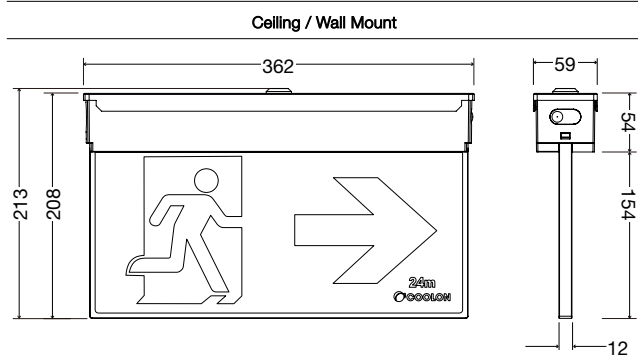

REPLACEMENT PARTS

Replacement Part Numbers	EXA-GSM-AT-CM-WH- Battery
	EXA-GSM-AT-CM-WH-Driver
	EXA-GSM-AT-CM-WH- Diffuser

ORDERING EXAMPLE

EXA	GBL	AT	CM	WH
EXIT LIGHT	MODEL	TEST MODE	MOUNTING	HOUSING COLOUR
EXA Emergency Light	GBL GuideBlade	AT Auto Test	CM Ceiling Mount	WH White Housing