


GUIDESLIM EXIT SIGN

EXIT CEILING MOUNT



GUIDESLIM EXIT SIGN CEILING MOUNT

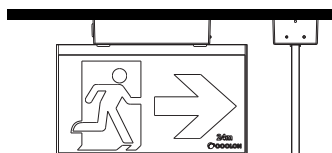

The GuideSlim is a ceiling mount, blade-style emergency exit sign designed for seamless architectural integration. Its slim profile delivers a clean, modern aesthetic, while the illuminated diffuser ensures clear, uniform visibility. Constructed from durable aluminium with a high-quality polycarbonate sign panel, it offers flexible installation, easy pictogram replacement, and full compliance with AS/NZS 2293 for dependable performance in commercial environments.

PRODUCT INFO

Range	Exit Light
Model	GuideSlim
Operating Mode	Auto Test
Mounting Method	Ceiling Mount
Battery	LiFePO4 6.4V 600mA
Voltage	220-240VAC, 50/60Hz
Power Consumption Standby	2.4W Standby 3.7W Max

PERFORMANCE SPECIFICATIONS

IP Rating	IP20
IK Rating	IK06
LEDs	12 X Osram DK LED 100,000 hours
Viewing Distance	24M
Photometric Classification	C0 D2 C90 D2
Working Temperature	0°C to 45°C


DESIGN SPECIFICATIONS

Weight	1.1 KG
Construction	Aluminium Trim Body
Diffuser Material	PMMA Diffuser Blade
Housing Colour	White or Black Housing
Pictograms	Directional Pictograms Supplied

COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS CISPR 15
Warranty	5 Year Warranty

DIMENSIONS (MM)

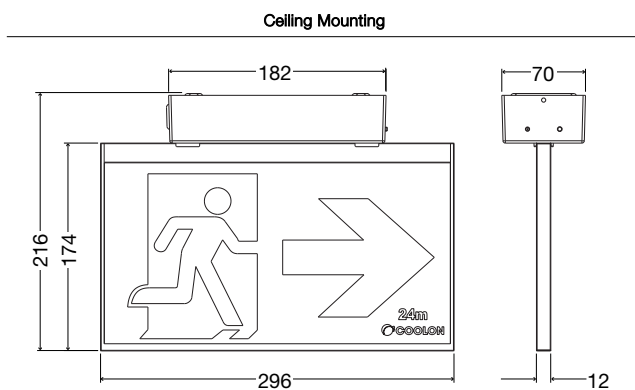

ACCESSORIES & PARTS

Accessories	ACC-GSM-FB-WH Flag Bracket
Replacement Part Numbers	EXA-GSM-AT-CM-WH- Battery
	EXA-GSM-AT-CM-WH-Driver
	EXA-GSM-AT-CM-WH- Diffuser

ORDERING EXAMPLE

EXA	GSM	AT	CM	WH
EXIT LIGHT	MODEL	TEST MODE	MOUNTING	HOUSING COLOUR
EXA Emergency Light	GSM GuideSlim	AT Auto Test	CM Ceiling Mount	WH White Housing
				BK Black Housing