


ORISNAP

EMERGENCY DOWNLIGHT



ORISNAP EMERGENCY RECESSED

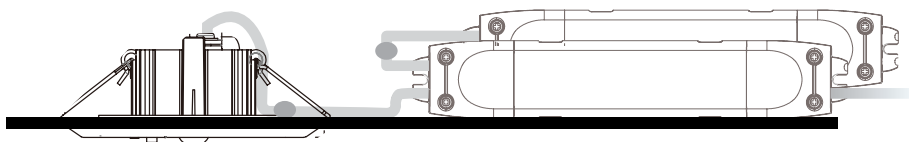

The OriSnap emergency recessed offers a compact, purpose-designed solution for compliant emergency illumination. Designed with a round lens and clean recessed mount, it operates at 3W maximum in both mains and emergency modes, delivering consistent light output with a 2-hour emergency runtime. Integrated auto-test functionality supports ongoing compliance while reducing maintenance effort, making it a practical and discreet choice for commercial and architectural applications.

PRODUCT INFO

Range	Emergency Light
Model	OriSnap
Operating Mode	Auto Test
Mounting Method	Recessed Mount
Battery	LiFeP04 6.4V 1500mA
Voltage	220-240VAC, 50/60Hz
Power Consumption Standby	3.5W Max

PERFORMANCE SPECIFICATIONS

IP Rating	IP20
IK Rating	IK06
Lumen Output	300 lm
CCT / CRI	5000K / Ra>70
Photometric Classification	C0 D63 C90 D63
Working Temperature	0°C to 45°C


DESIGN SPECIFICATIONS

Weight	0.5 KG
Construction	Poly Carbonate Body
Housing Colour	White or Black Housing


COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS
Warranty	5 Year Warranty

DIMENSIONS (MM)

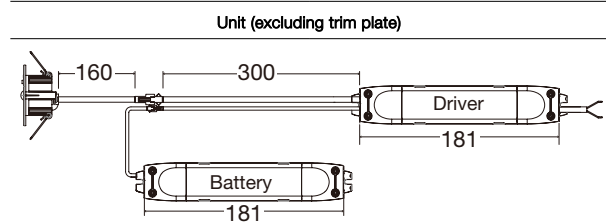


Trim Plate 55mm DIA

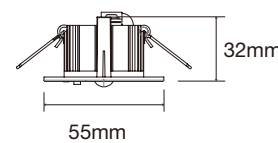

Required Cutout Size 45mm DIA

Trim Plate 140mm DIA

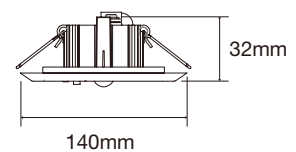

Required Cutout Size 80mm DIA

REPLACEMENT PARTS

Replacement Part Numbers	EXA-GSM-AT-CM-WH- Battery
	EXA-GSM-AT-CM-WH-Driver
	EXA-GSM-AT-CM-WH- Diffuser

ORDERING EXAMPLE

EMA	OSN	AT	WIDE	WH
EMERGENCY	MODEL	TEST MODE	OPTICS	HOUSING COLOUR
EMA Emergency Light	OCT OriCast	AT Auto Test	WIDE Wide 140° Optics	WH White Housing
			OVAL Oval Optics	BK Black Housing