

KOMATSU

WA1200



Lighting Design Simulation Report



This report is compiled to provide illustrations of product use for a particular application. It is created for evaluation purposes only. Individual machines may vary in configuration, hence affecting results. Please contact us to request a specific design for your application. Coolon recommends that all system upgrades are carried out by a qualified auto electrician.

SIMULATION



KOMATSU WA1200
OPTION A

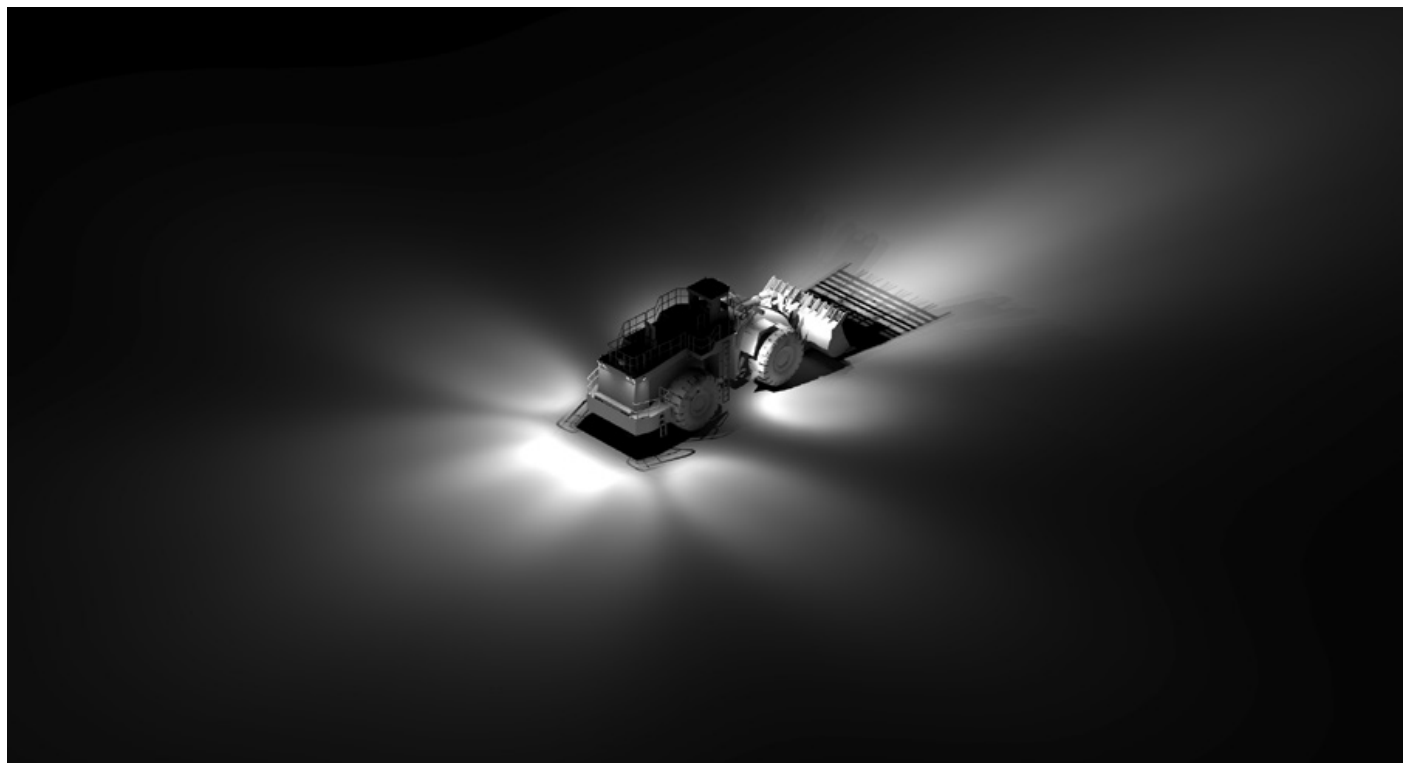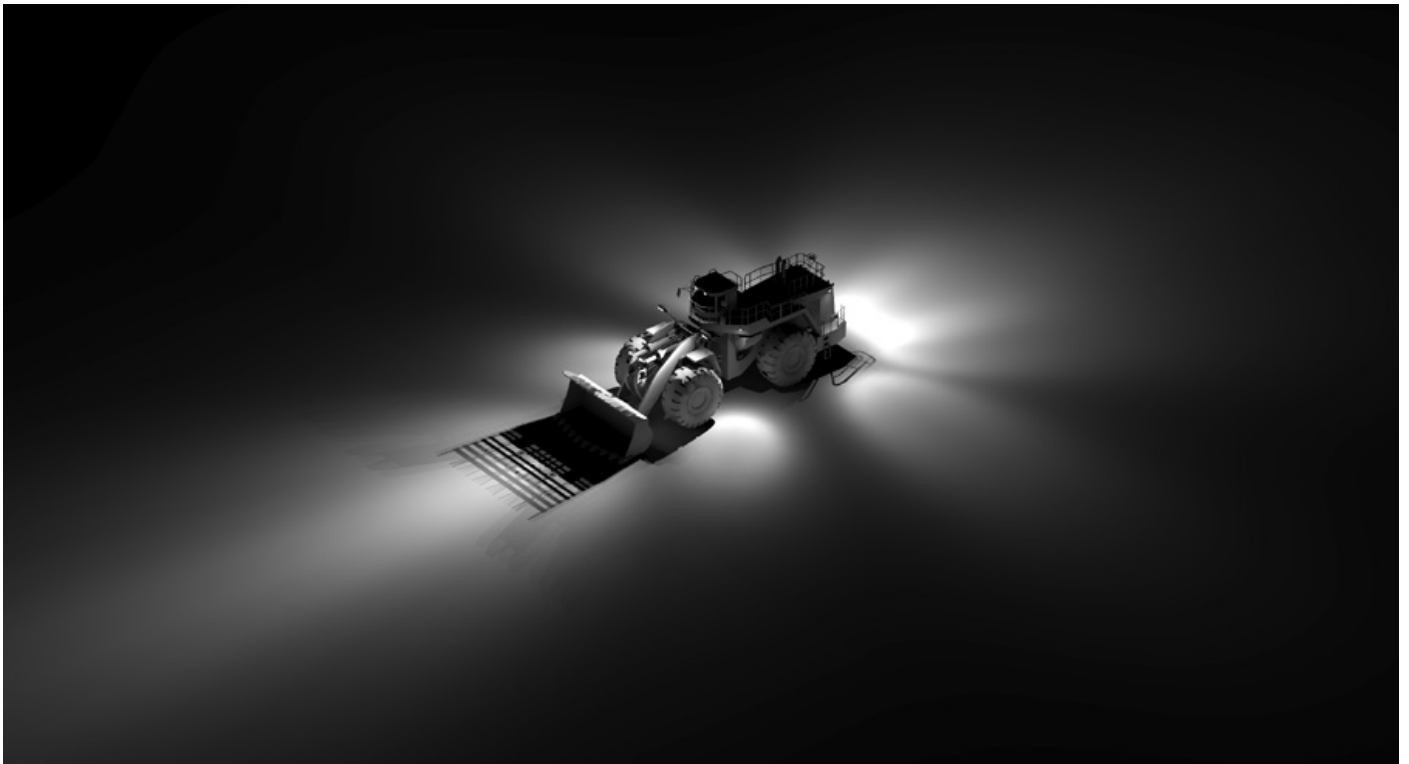

LUMINAIRE SCHEDULE


KOMATSU WA1200 OPTION A

Model No.	Luminaire	Optic Type	Quantity
CP9-L07	CP9 Flood Light	L07 - 14° Beam Angle	2
CP9-O209	CP9 Flood Light	O209 - 40° x 18° Beam Angle	2
CP9-L25	CP9 Flood Light	L25 - 50° Beam Angle	10

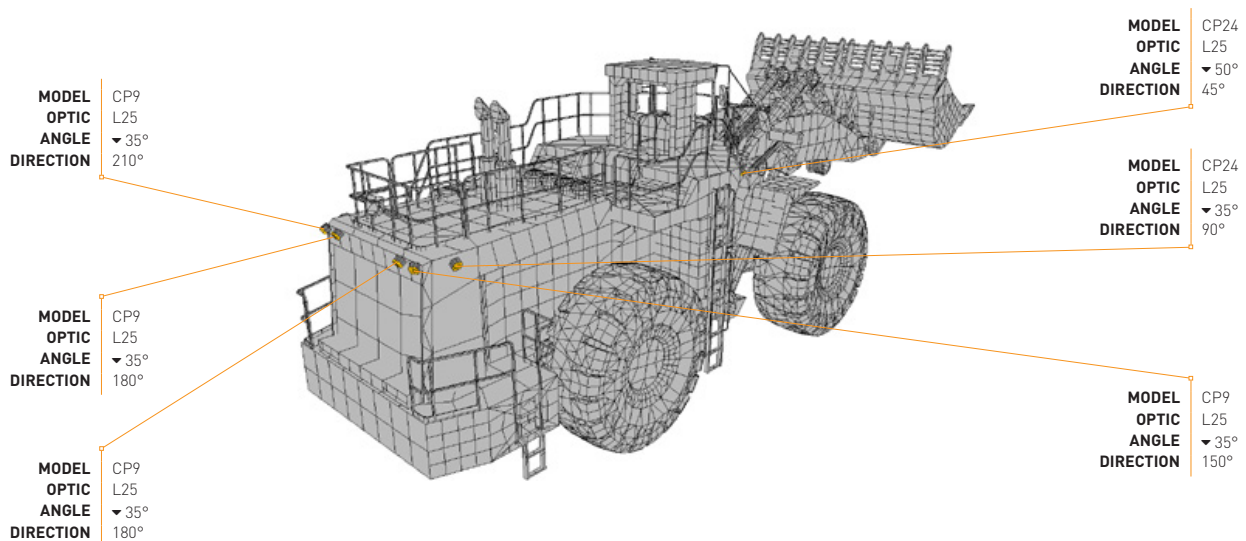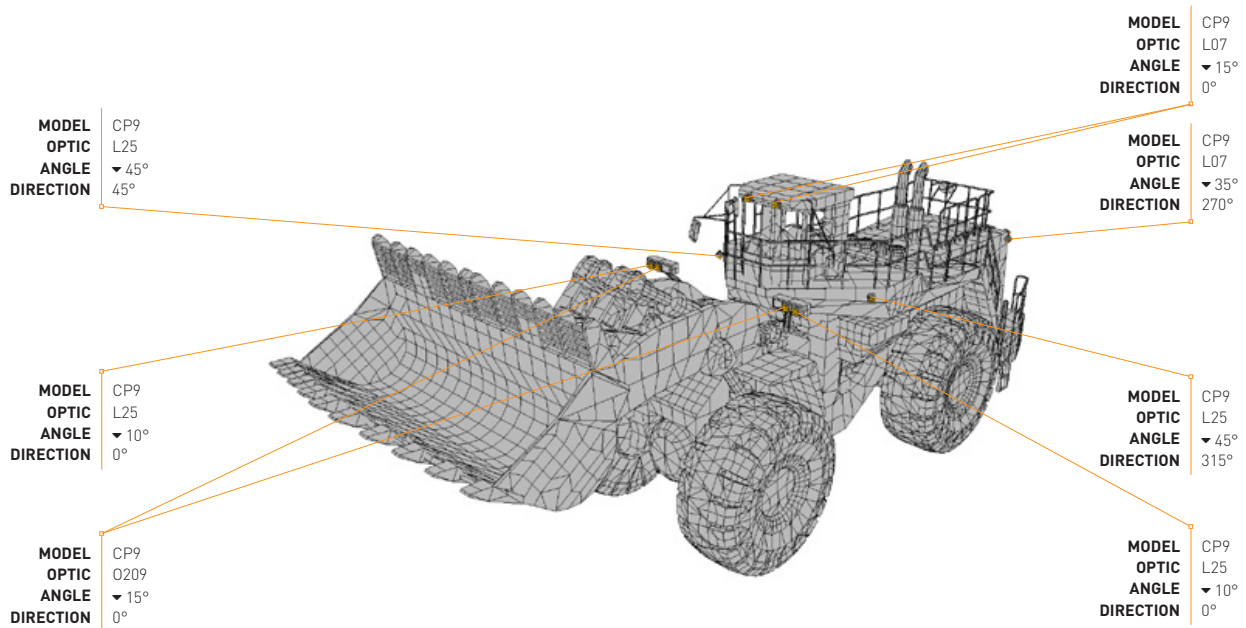

ISOLINE VIEW


KOMATSU WA1200
OPTION A

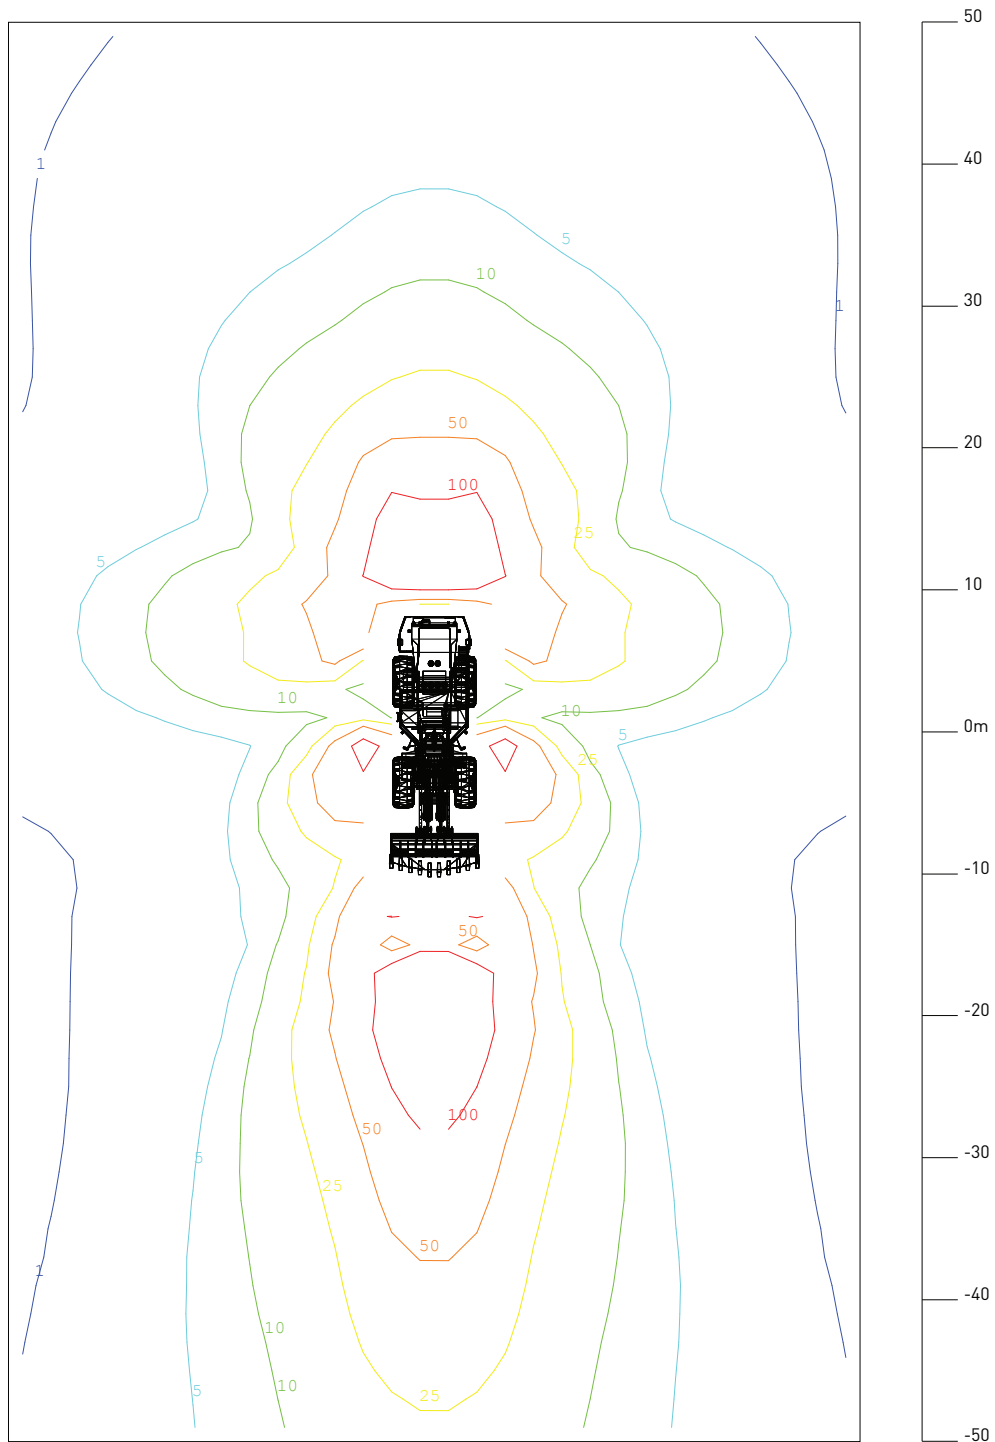

Total LLF: 0.7



OPERATOR'S VIEW

KOMATSU WA1200
OPTION A

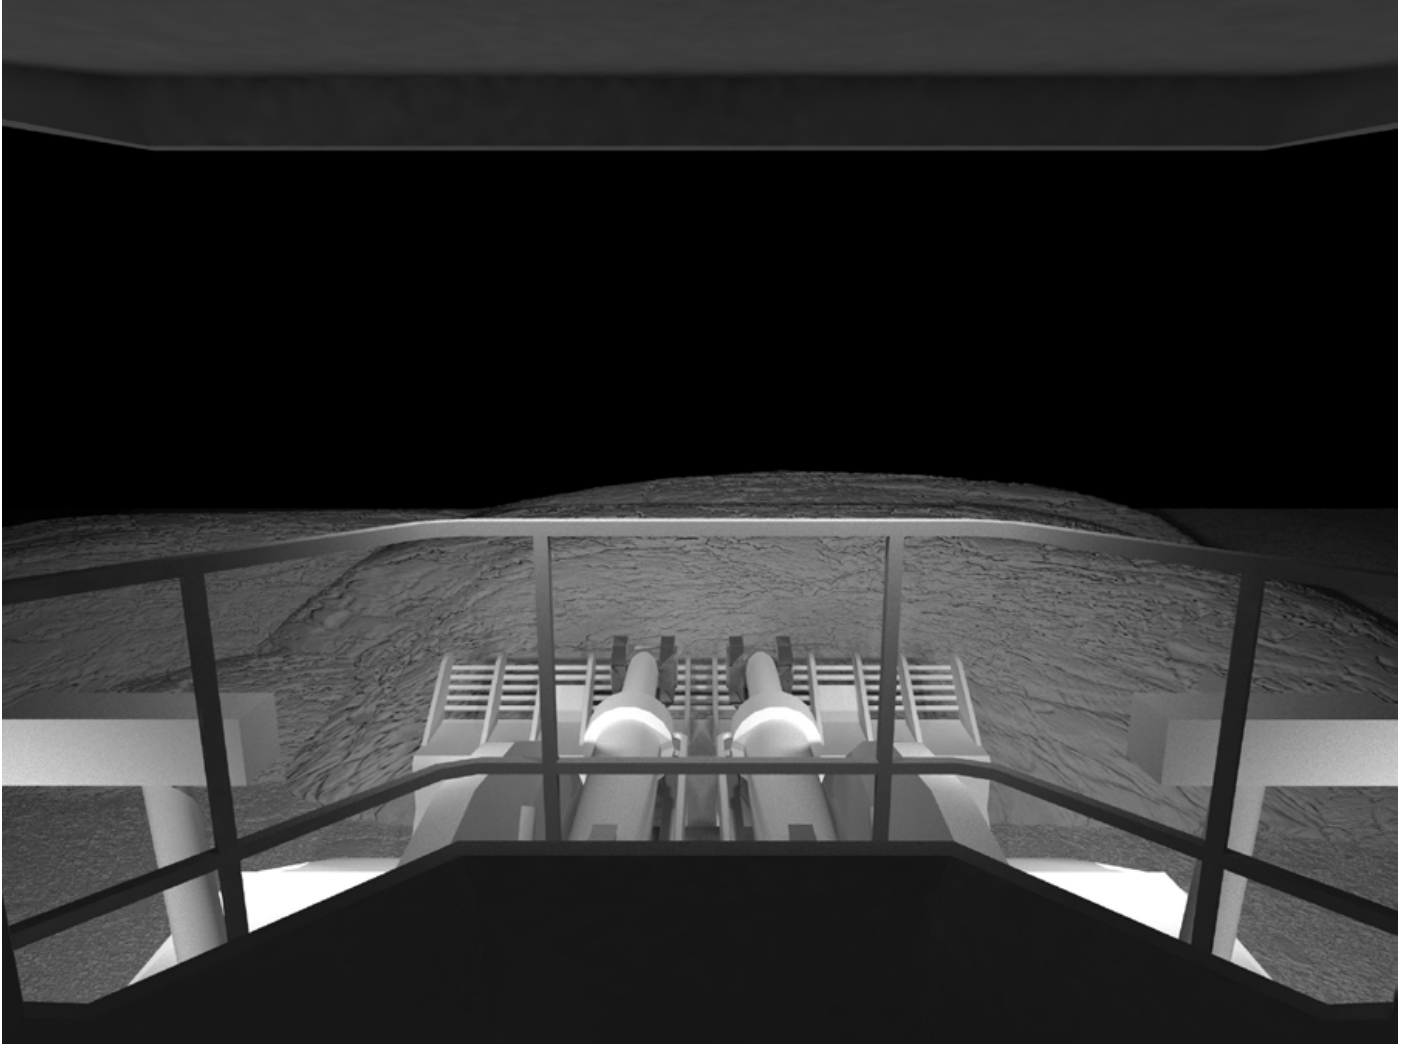

SIMULATION


KOMATSU WA1200
OPTION B

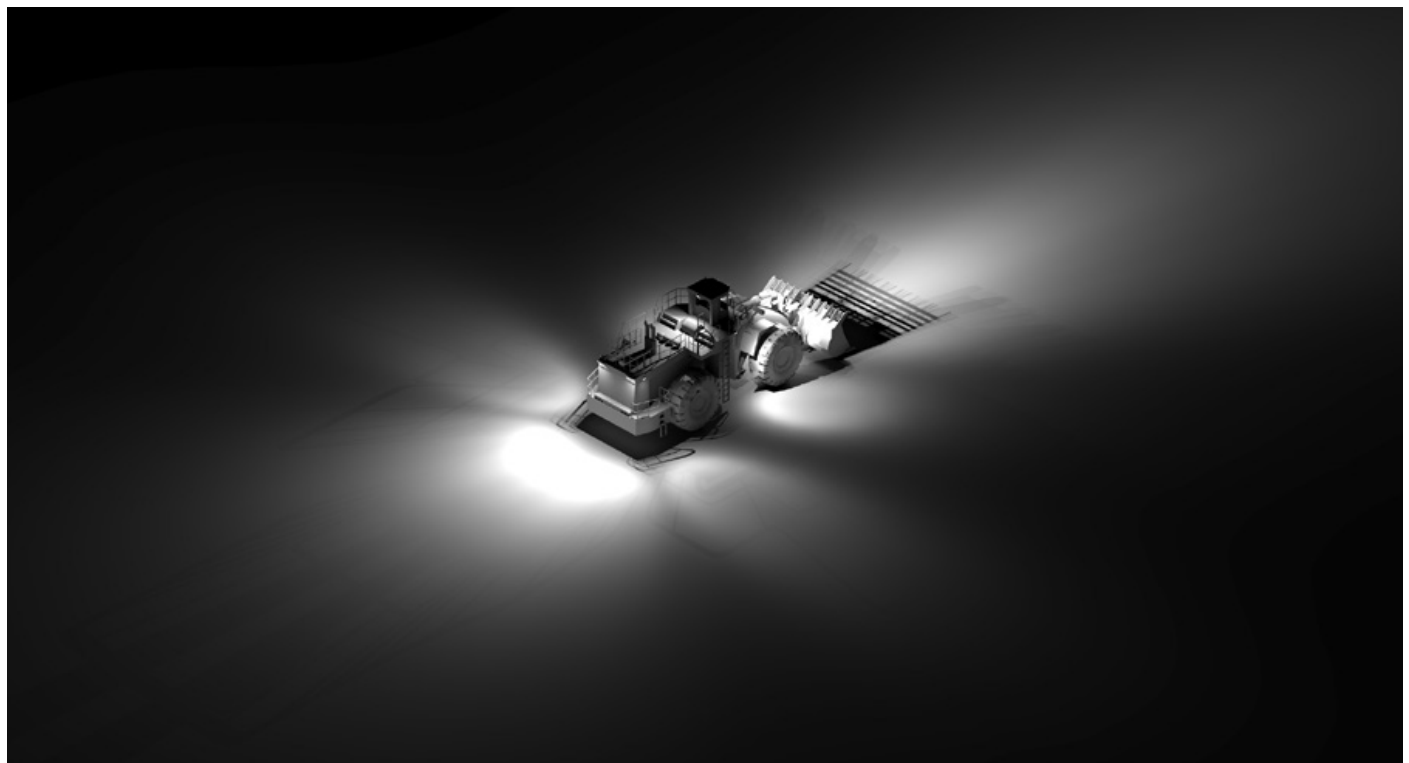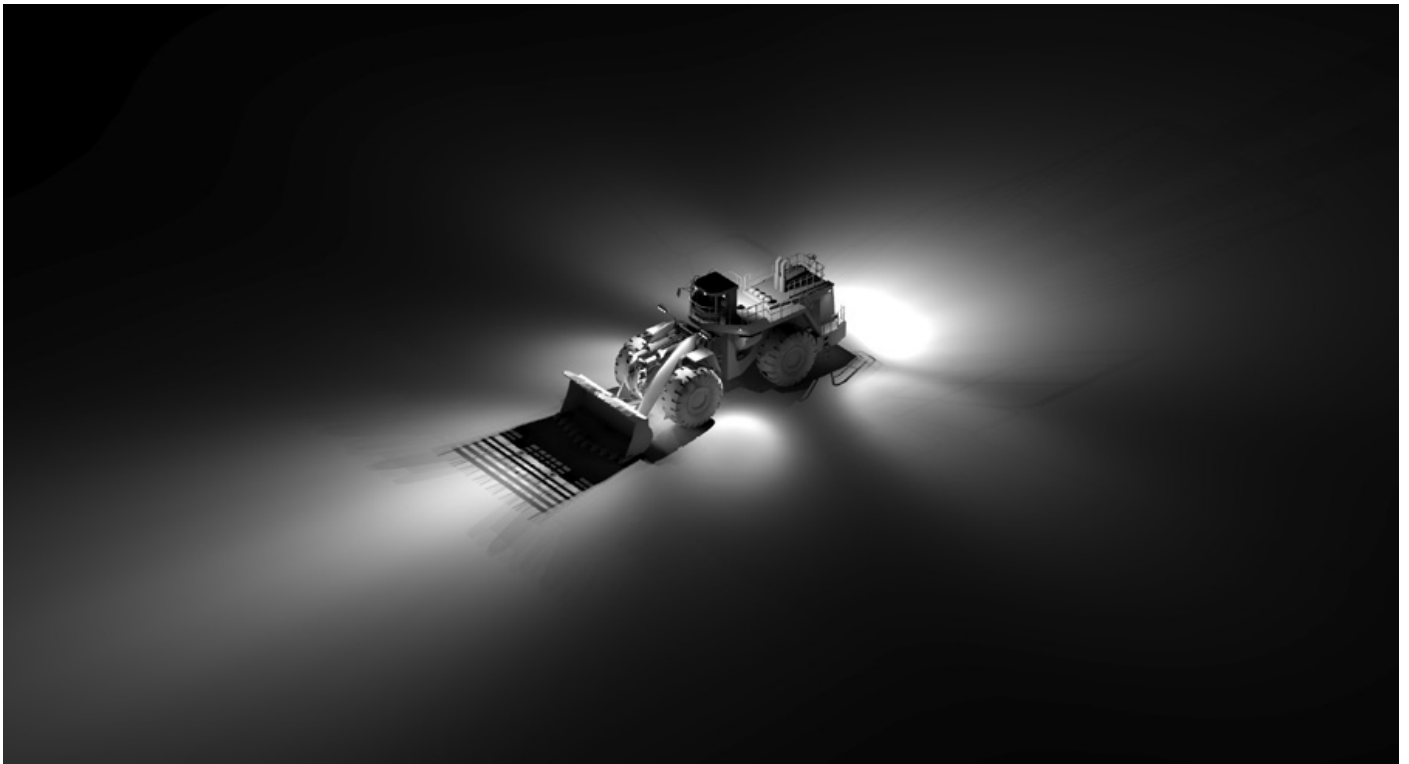

LUMINAIRE SCHEDULE


KOMATSU WA1200 OPTION B

Model No.	Luminaire	Optic Type	Quantity
CP9-NOP	CP9 Flood Light	No Optics - 120° Beam Angle	1
CP9-L07	CP9 Flood Light	L07 - 14° Beam Angle	2
CP9-O209	CP9 Flood Light	O209 - 40° x 18° Beam Angle	6
CP9-L25	CP9 Flood Light	L25 - 50° Beam Angle	12

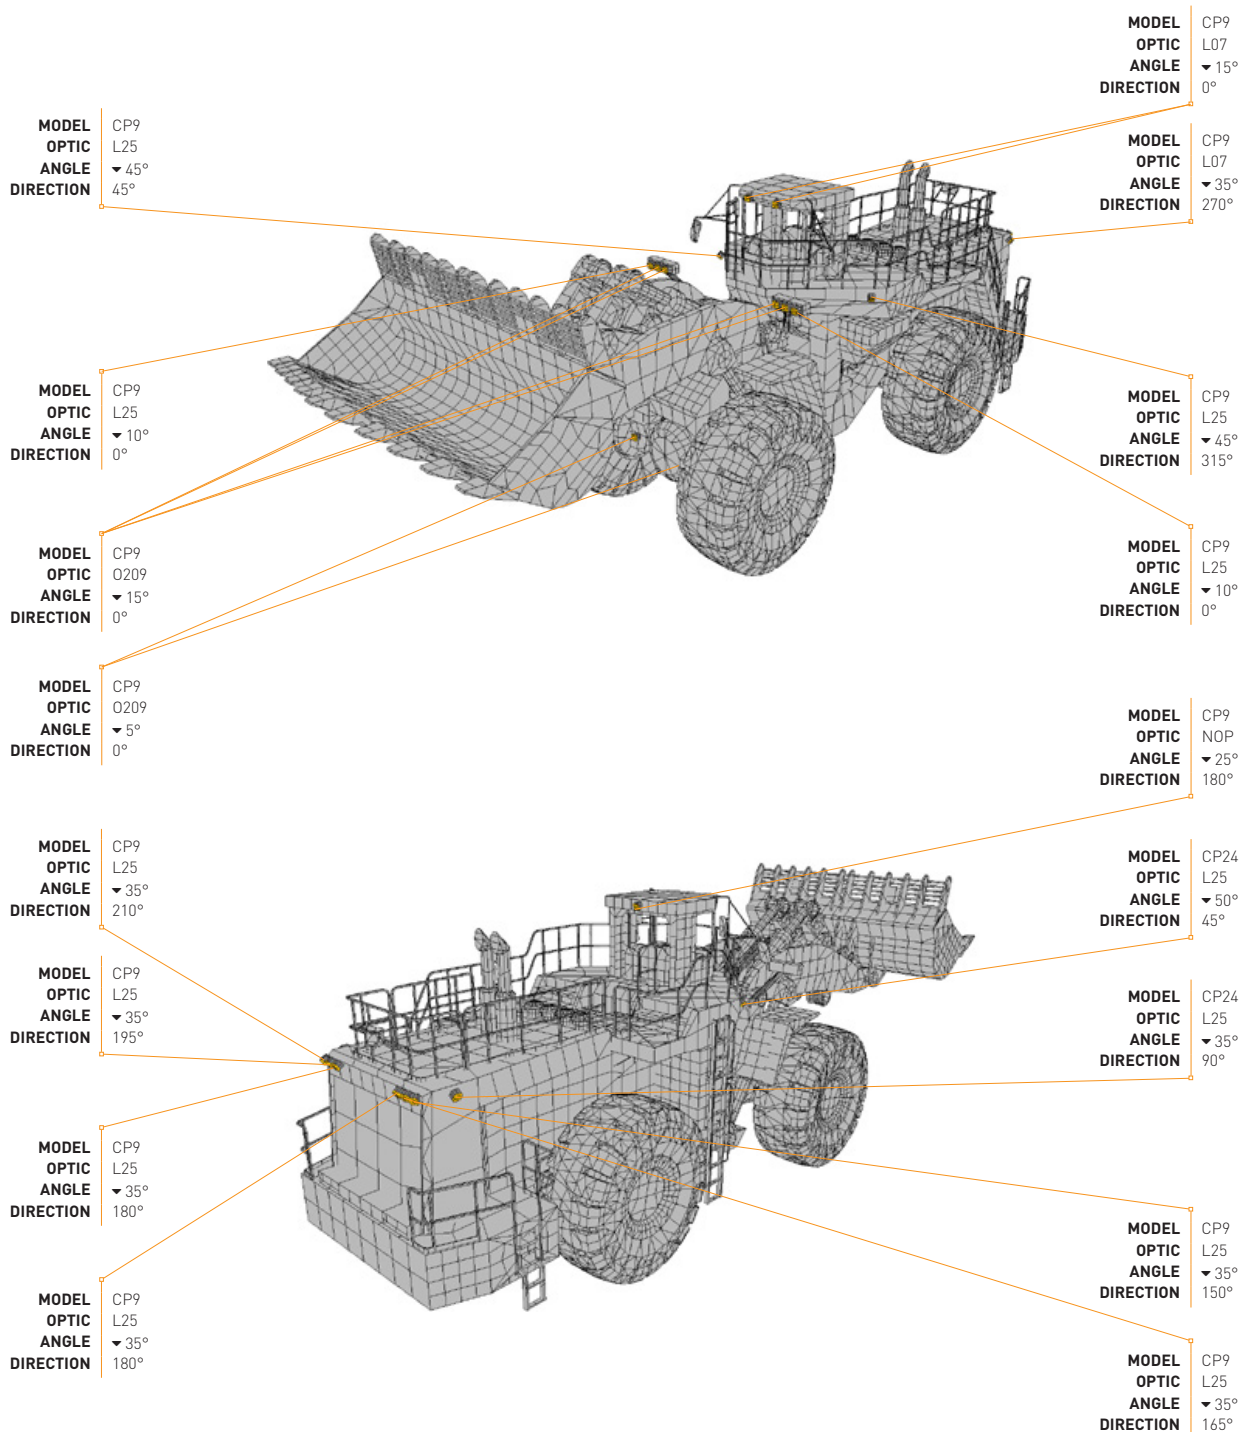

ISOLINE VIEW

KOMATSU WA1200
OPTION B

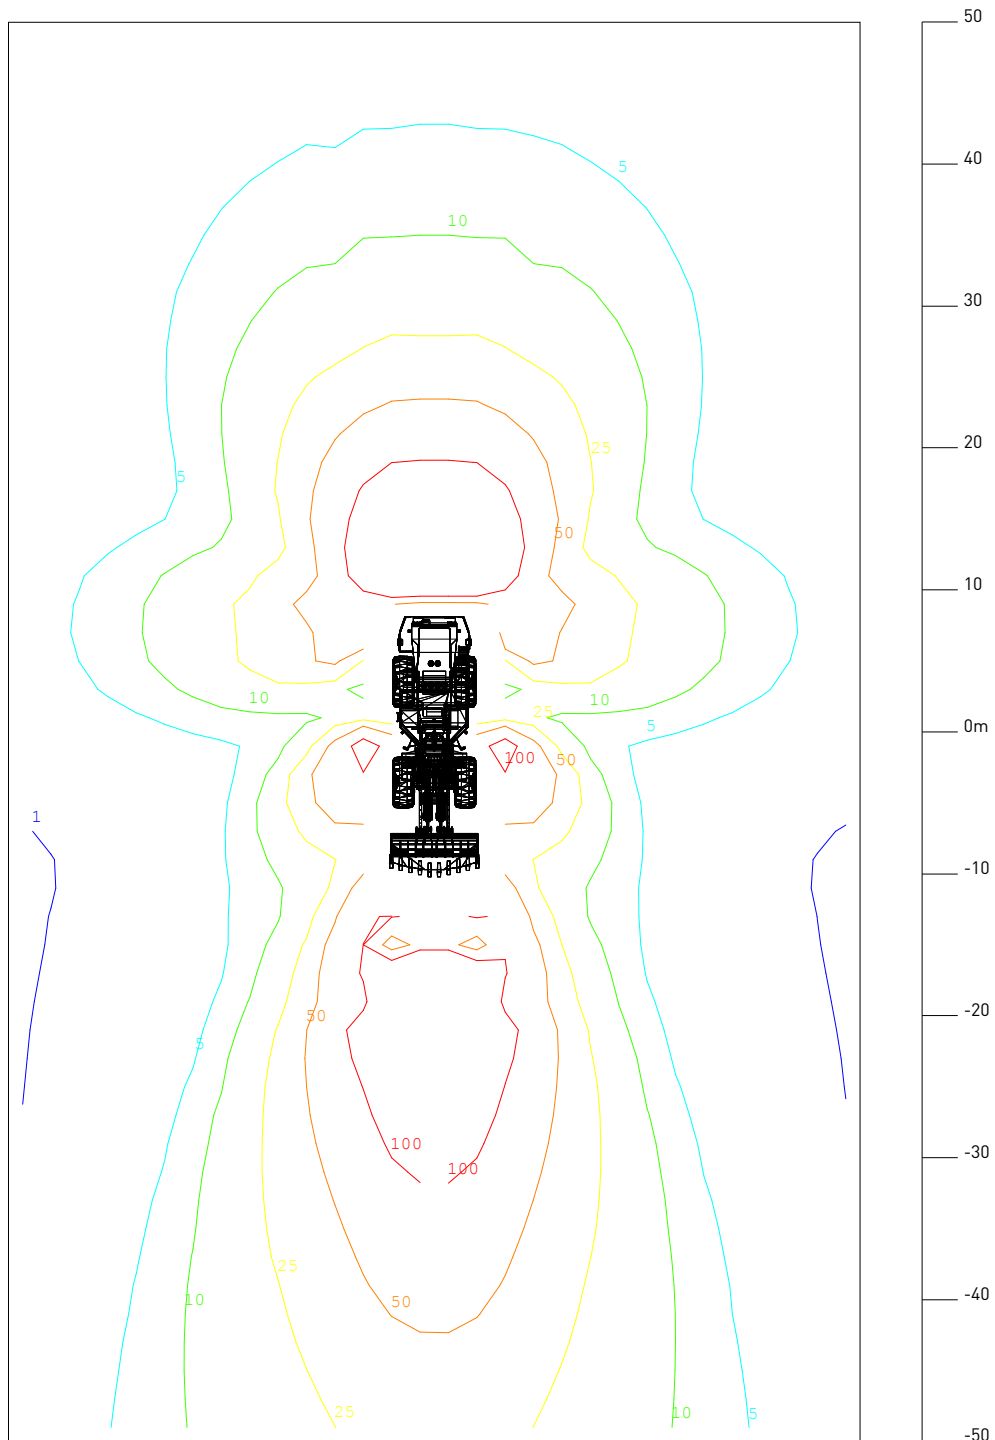

Total LLF: 0.7

OPERATOR'S VIEW

KOMATSU WA1200
OPTION B

