




LIEBHERR

R9250 / R9350

Lighting Design Simulation Report

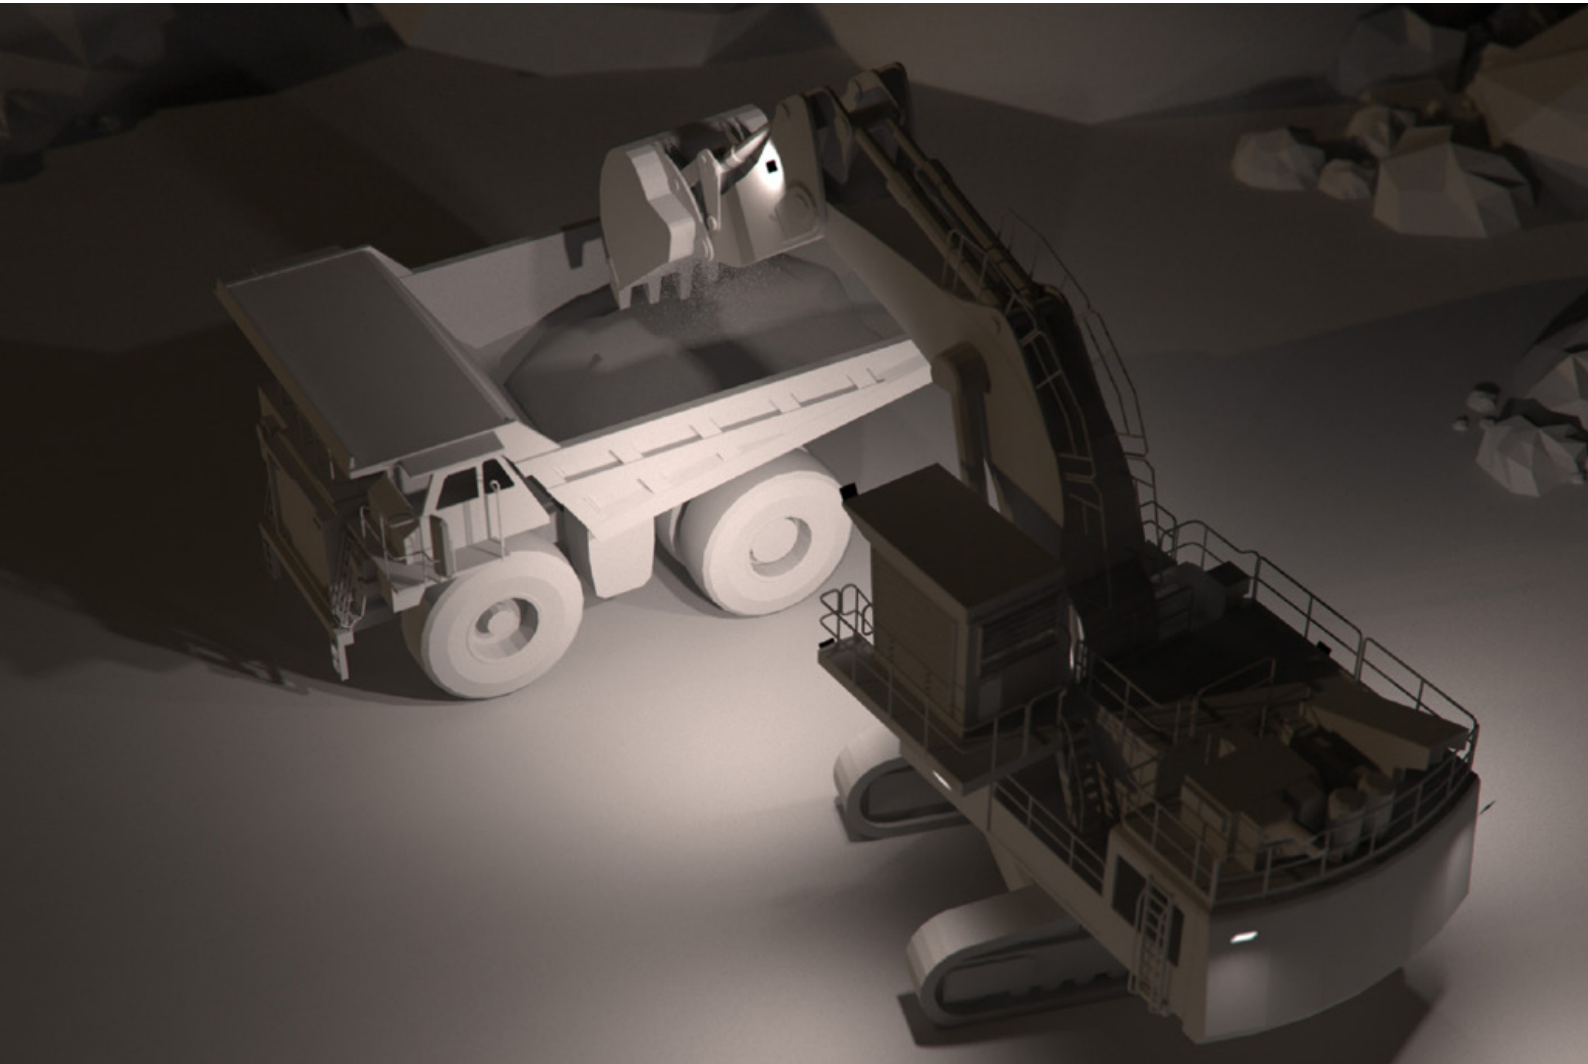


R9250 Suggested Layout

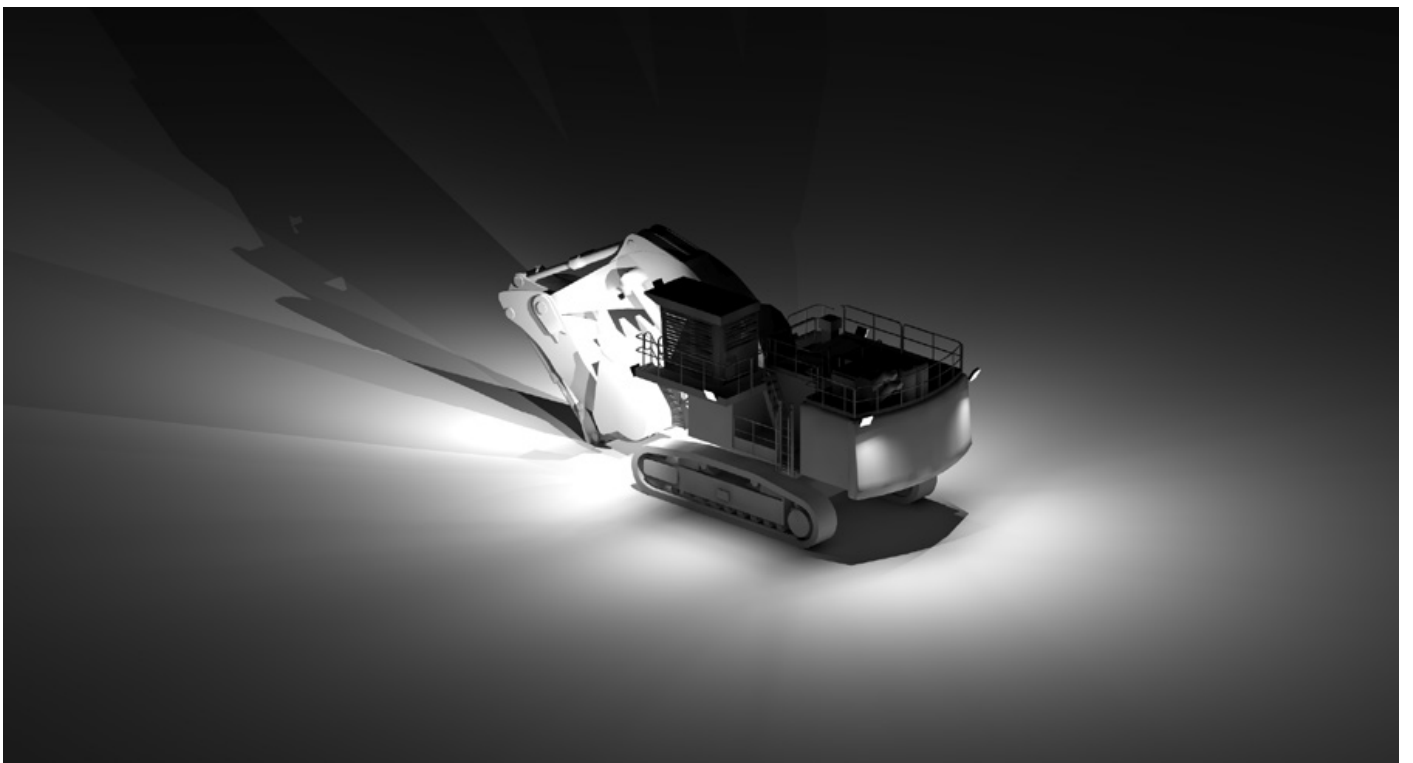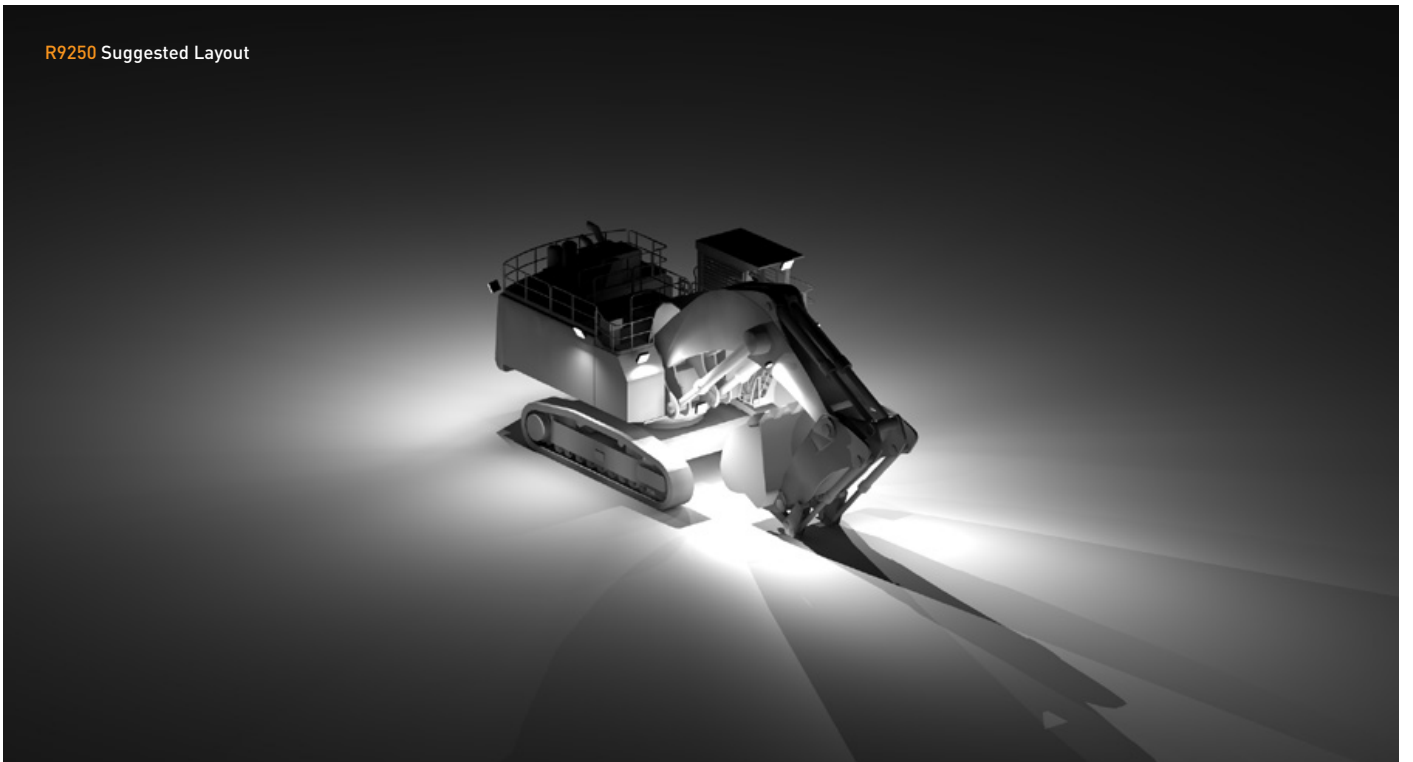


R9250 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-0209	CP56 Flood Light	O209 - 40° x 18° Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics - 120° Beam Angle	5
CP56-L25	CP56 Flood Light	L25 - 50° Beam Angle	2
CP24-L25	CP24 Flood Light	L25 - 50° Beam Angle	2

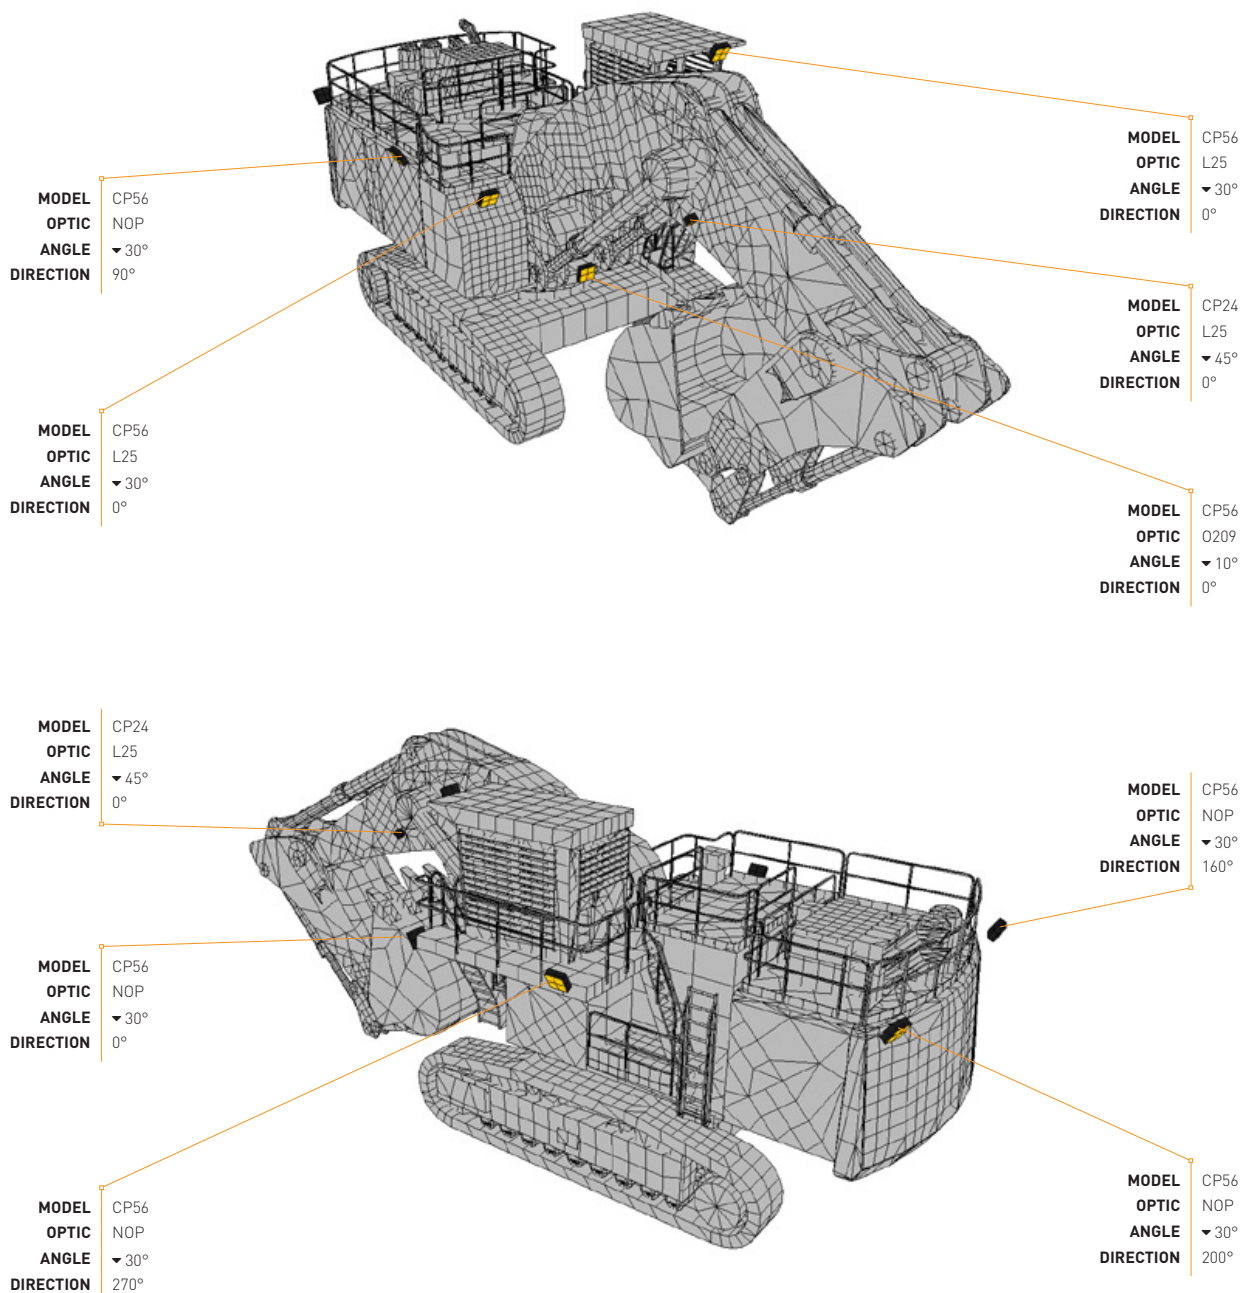


R9250 ISOLINE VIEW

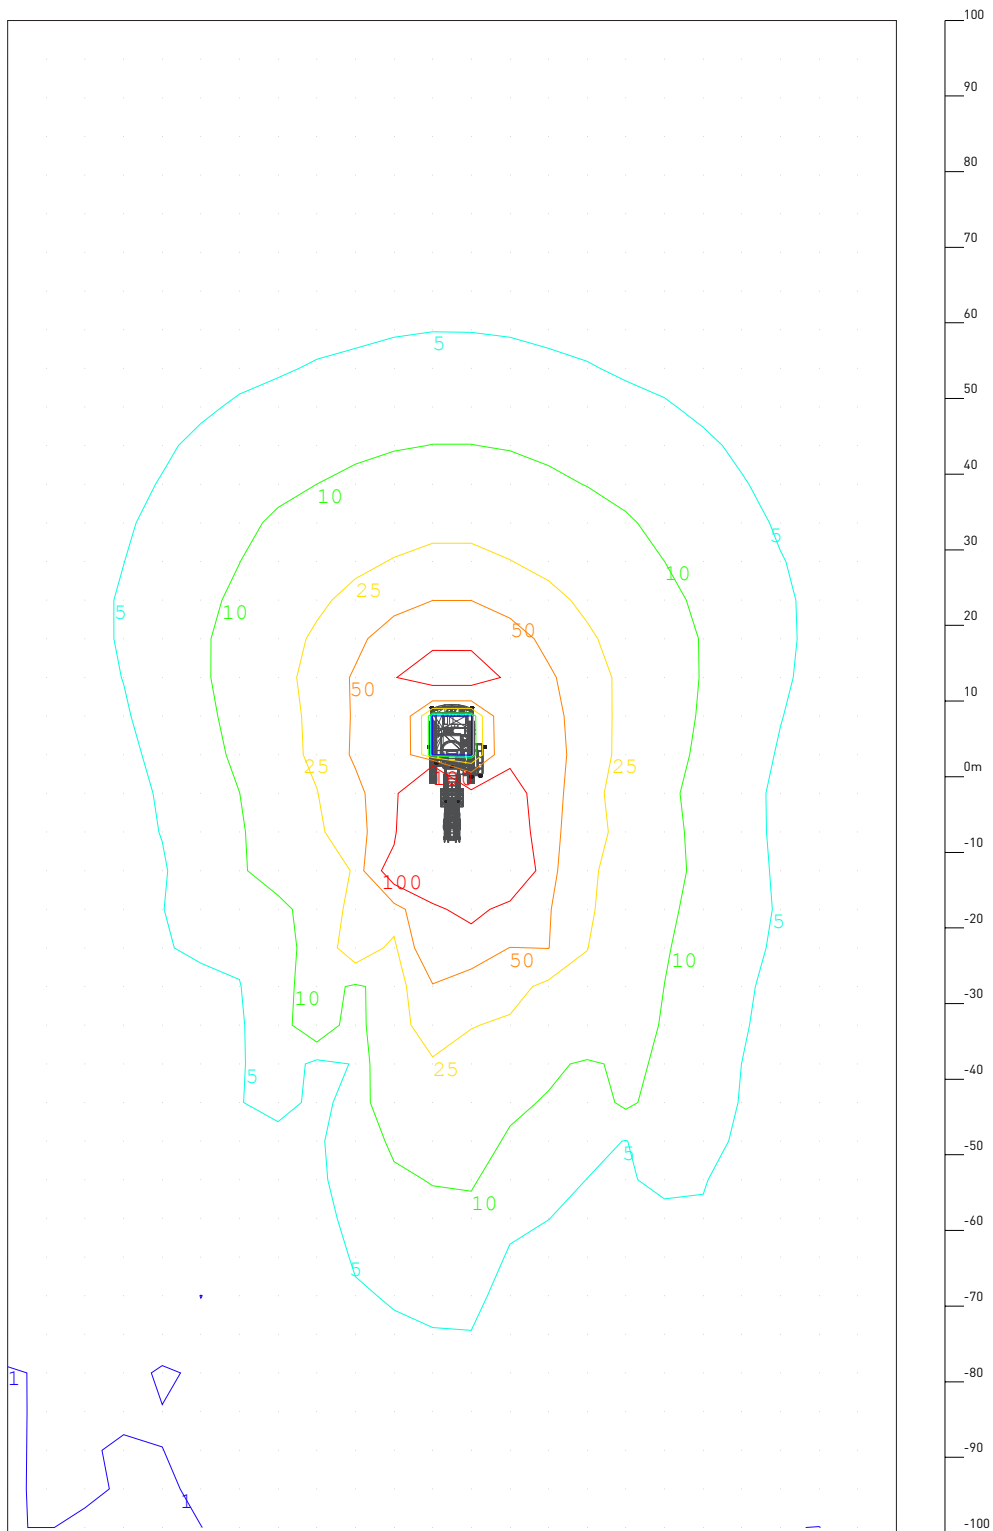


Total LLF: 0.7

R9250 OPERATOR'S VIEW SIMULATION

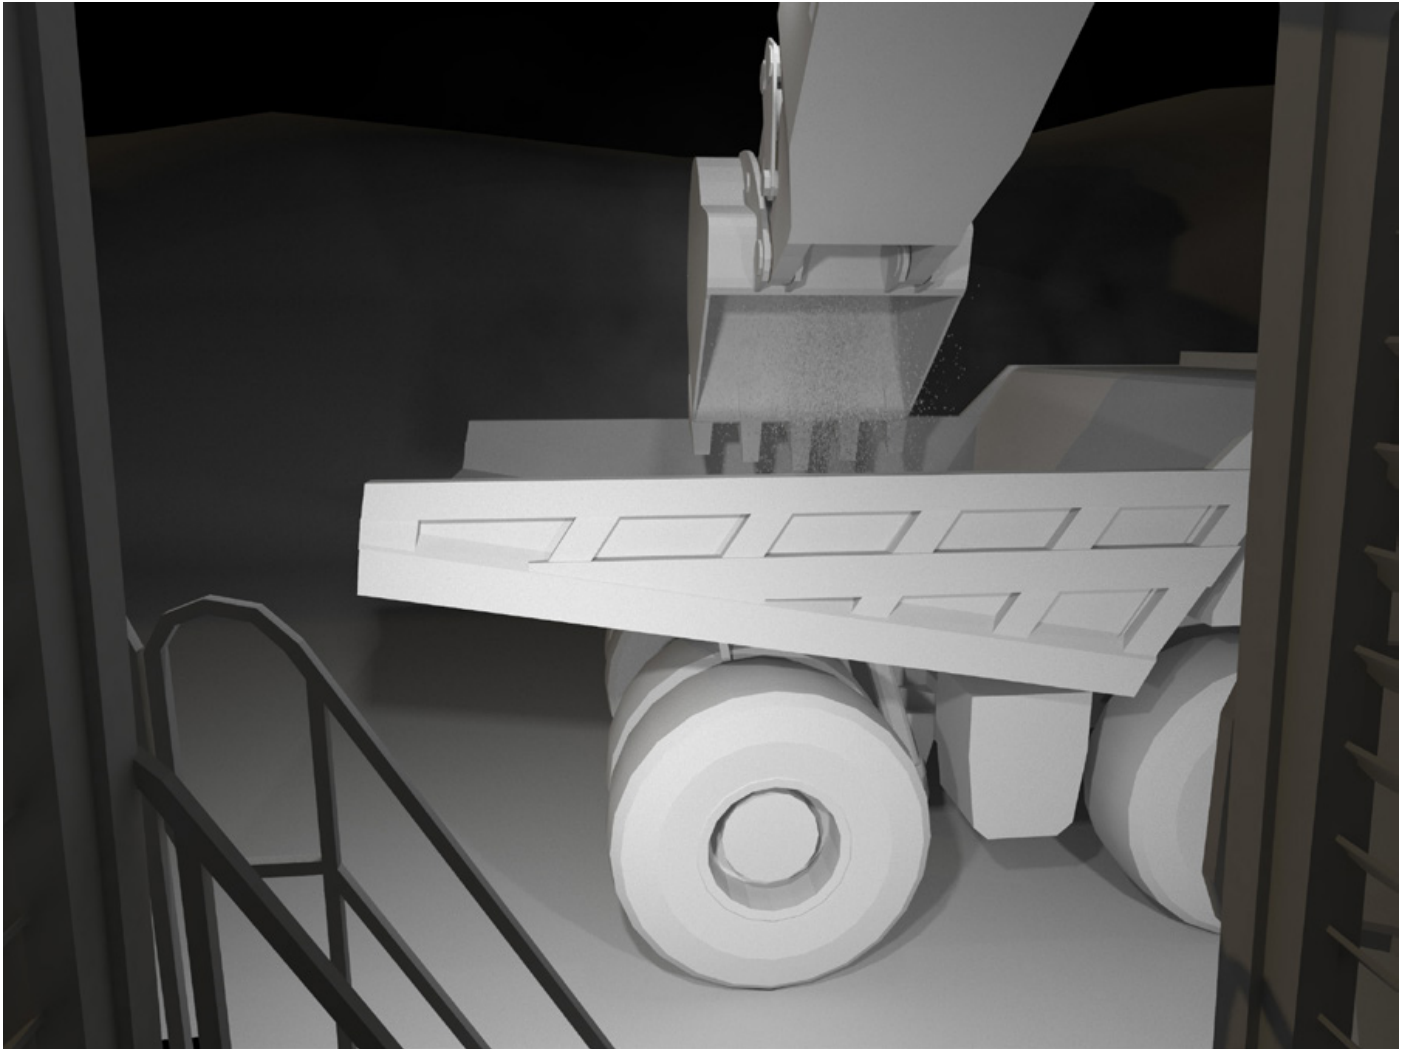


R9350 Suggested Layout

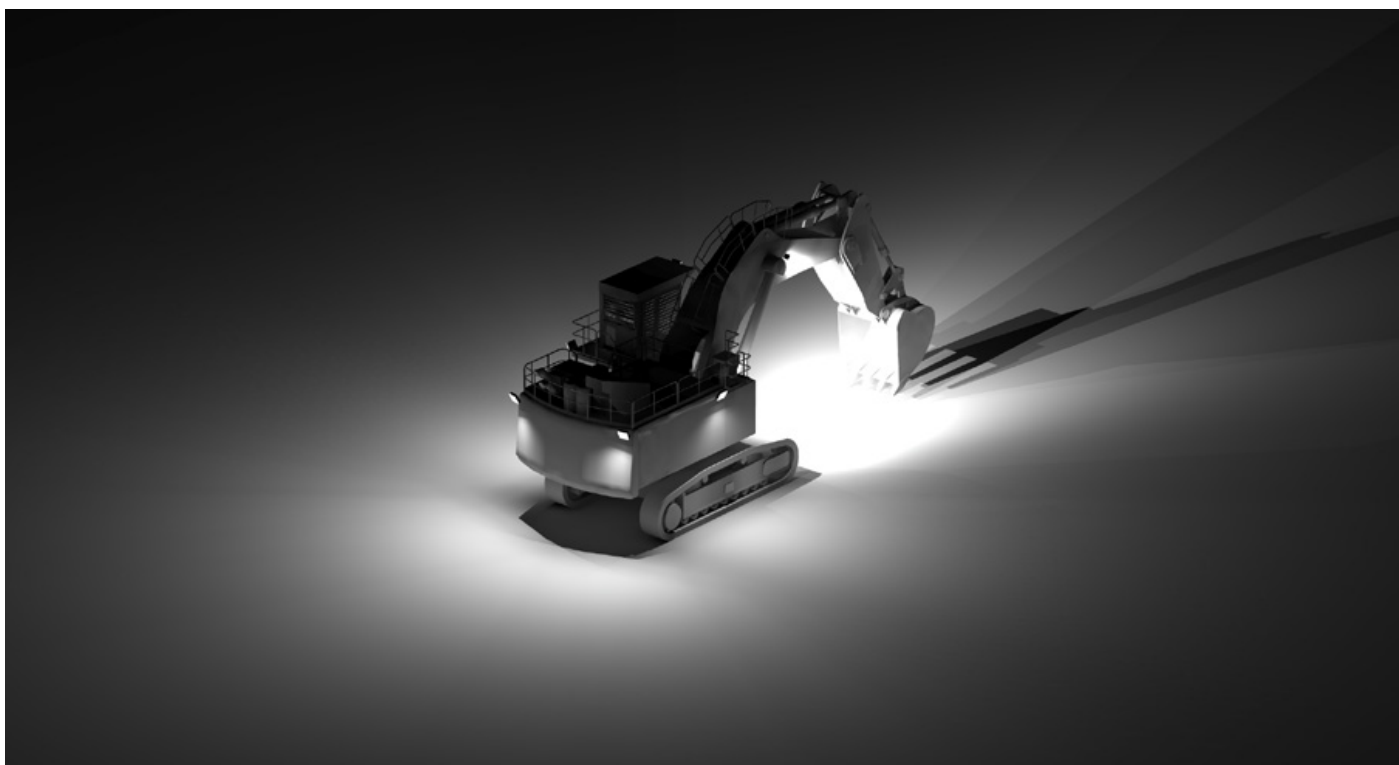


R9350 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-0209	CP56 Flood Light	O209 - 40° x 18° Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics - 120° Beam Angle	5
CP56-L25	CP56 Flood Light	L25 - 50° Beam Angle	2
CP24-L25	CP24 Flood Light	L25 - 50° Beam Angle	2

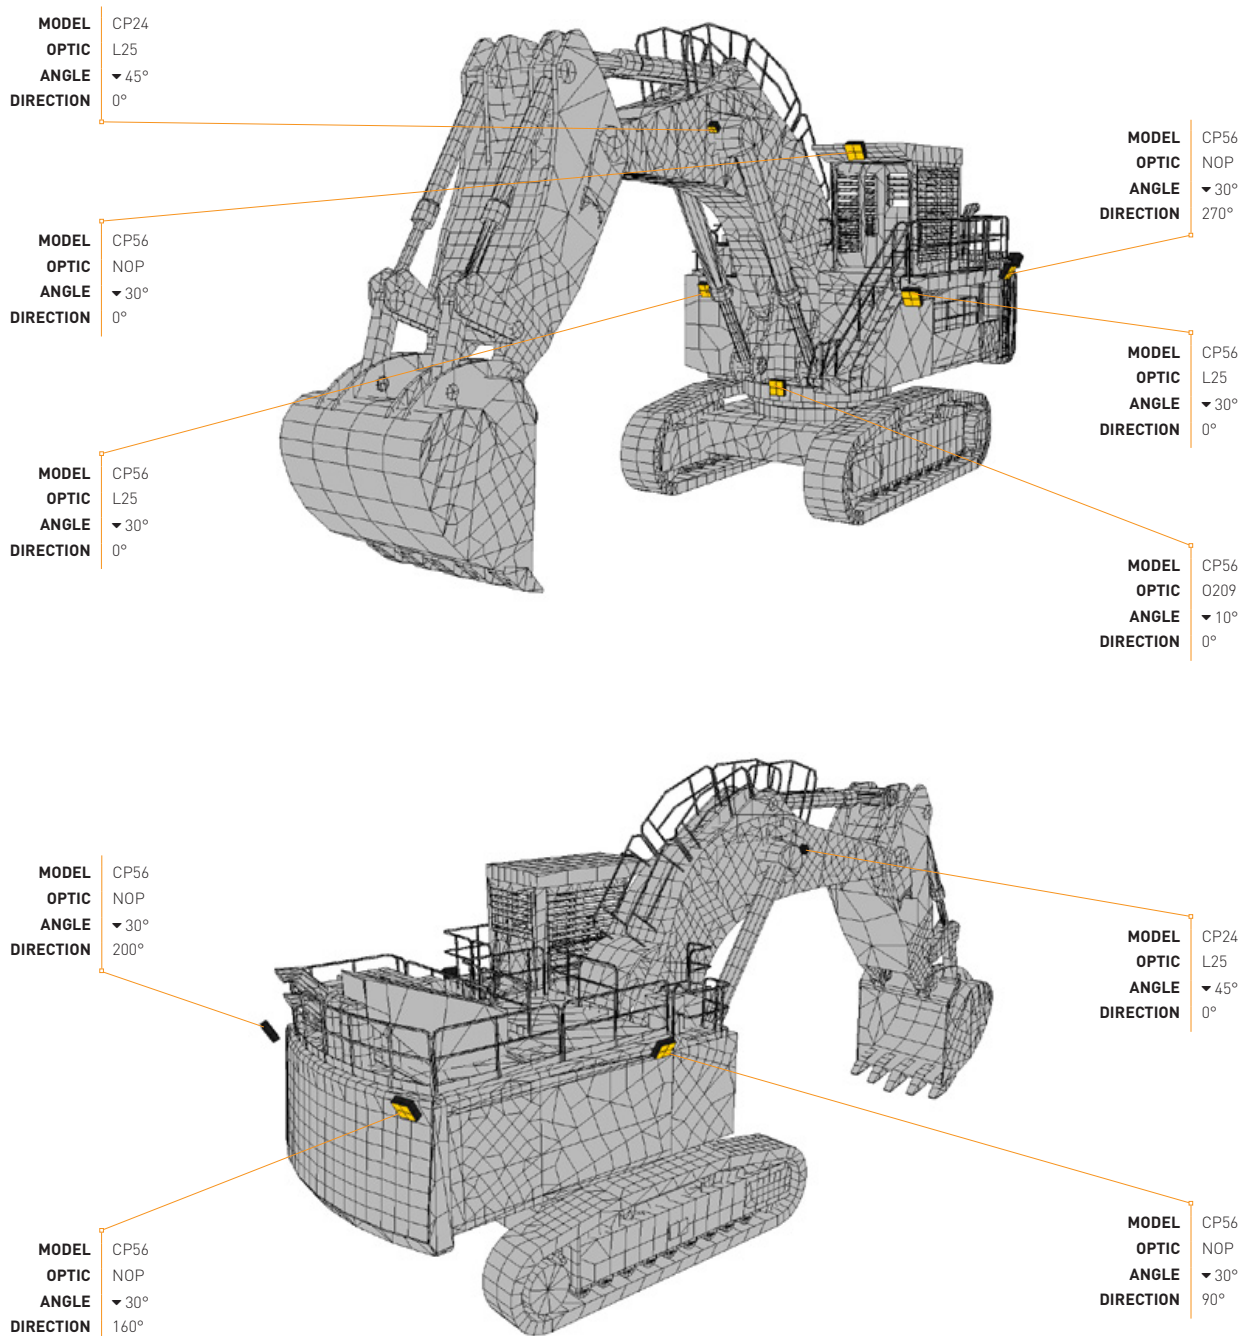

R9350 ISOLINE VIEW

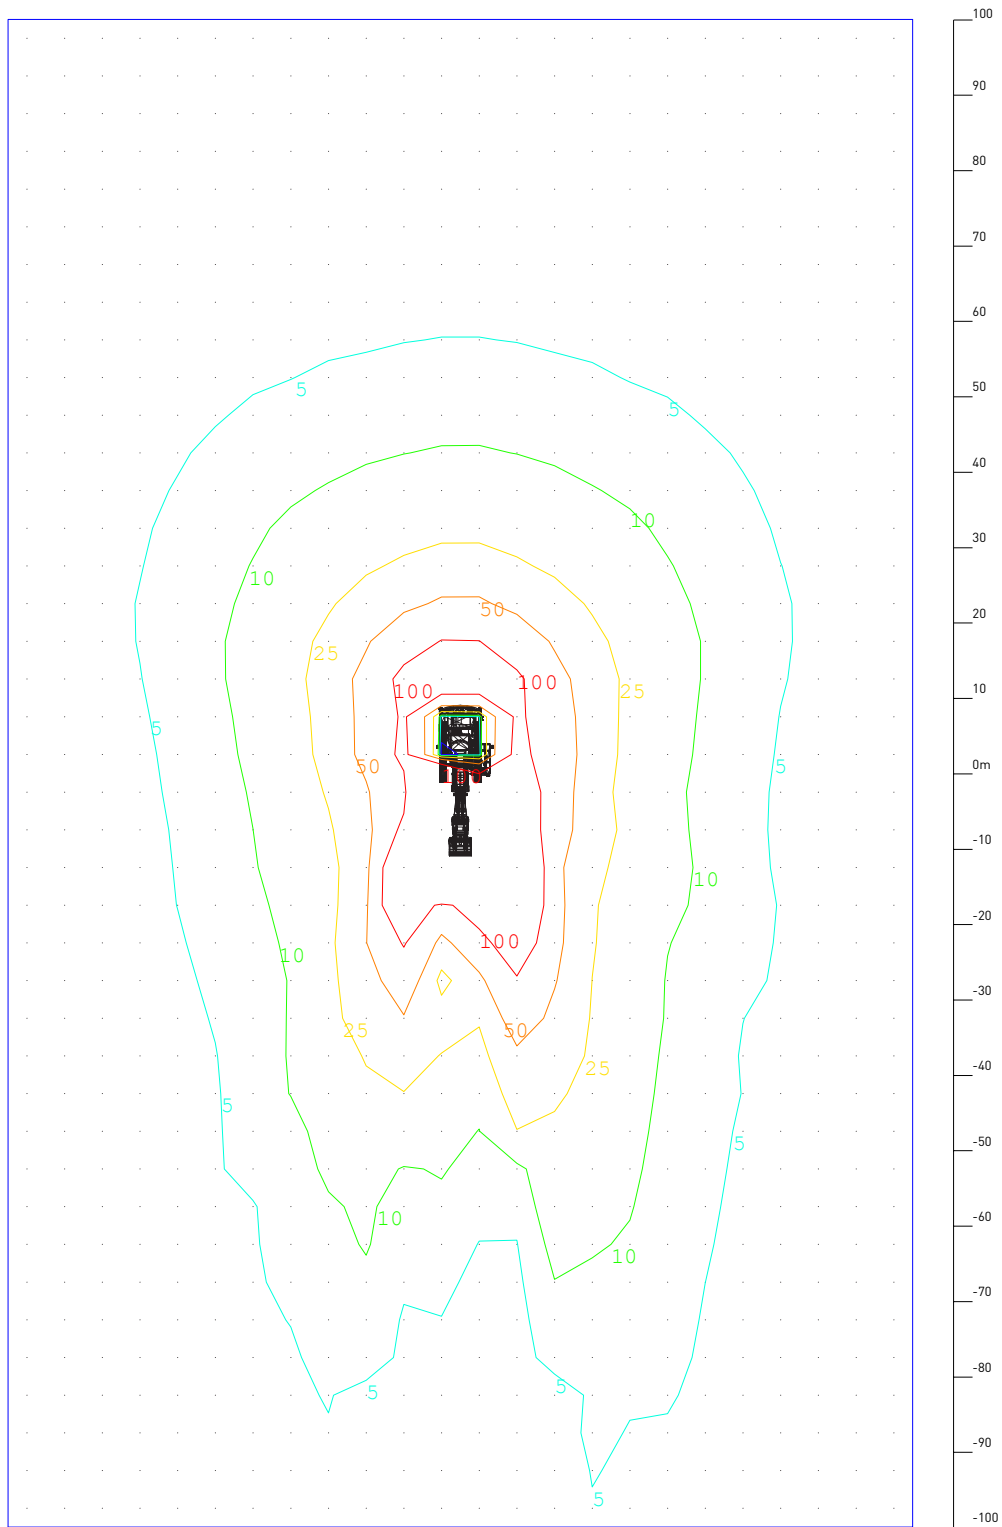

Total LLF: 0.7

R9350 OPERATOR'S VIEW SIMULATION

