


KOMATSU

WA1200



Lighting Design Simulation Report

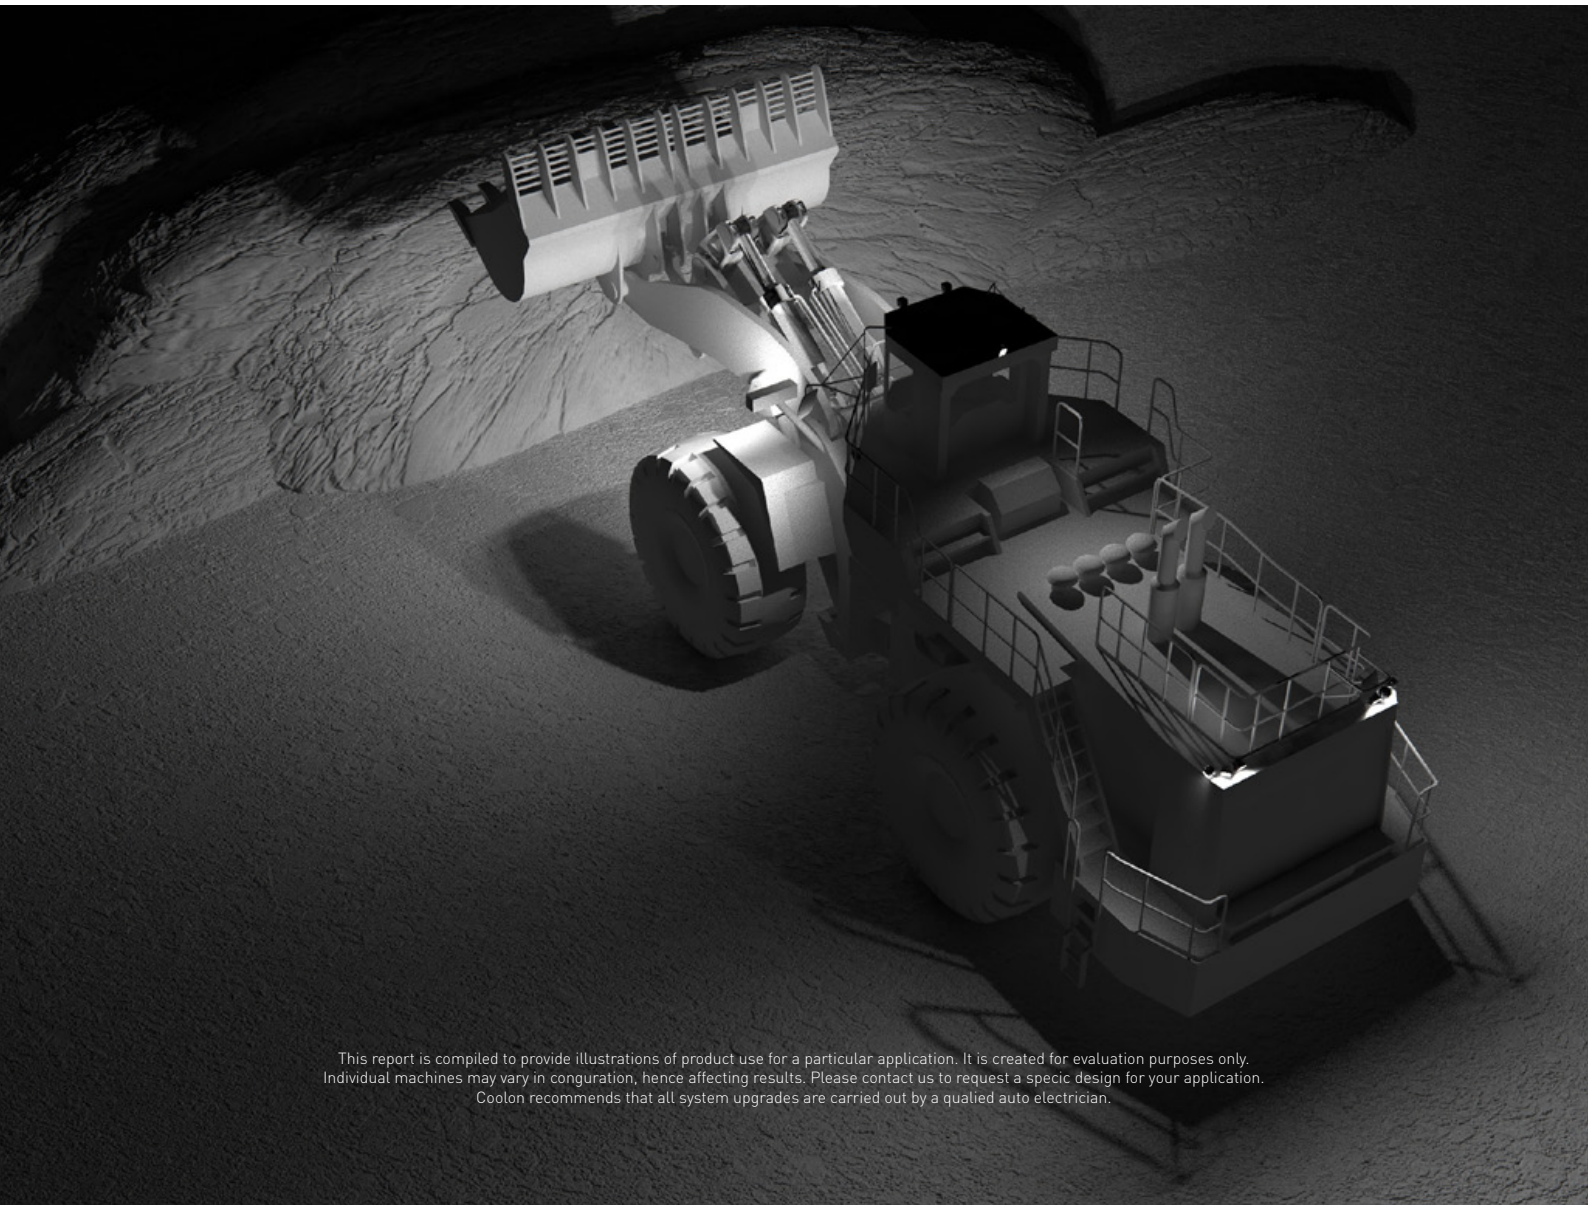

LUMINAIRE SCHEDULE


KOMATSU WA1200 OPTION A

Model No.	Luminaire	Optic Type	Quantity
CP12-NARROW	CP12 Flood Light	NARROW - 14° Beam Angle	2
CP12-OVAL	CP12 Flood Light	OVAL - 40° x 18° Beam Angle	2
CP12-MEDIUM	CP12 Flood Light	MEDIUM - 50° Beam Angle	10

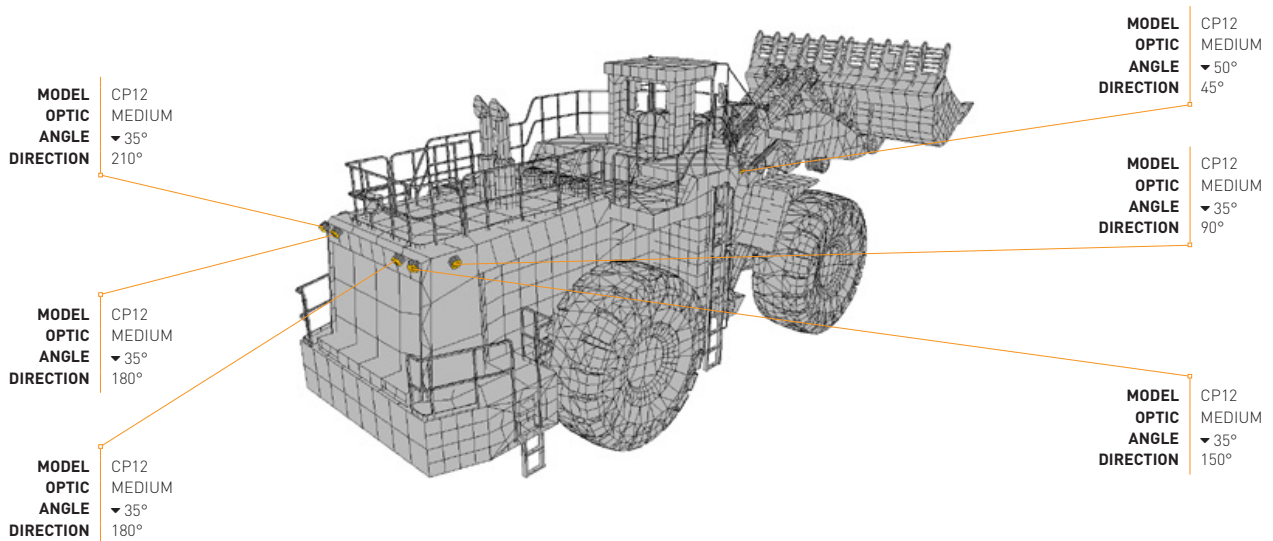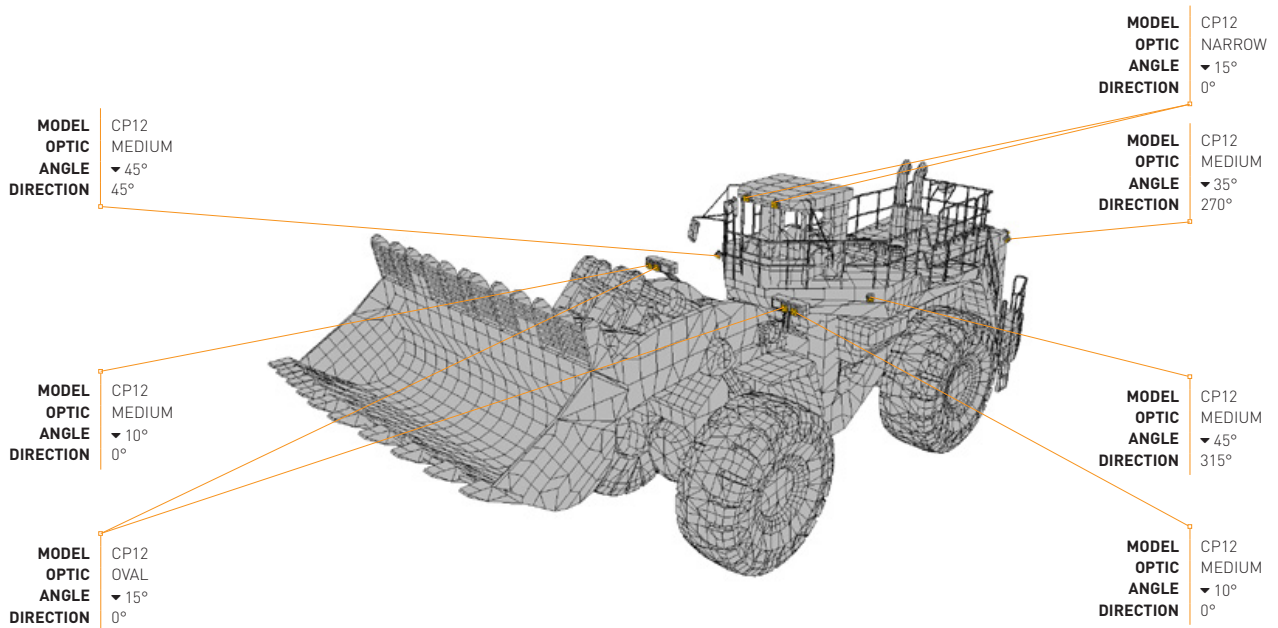

ISOLINE VIEW



KOMATSU WA1200
OPTION A

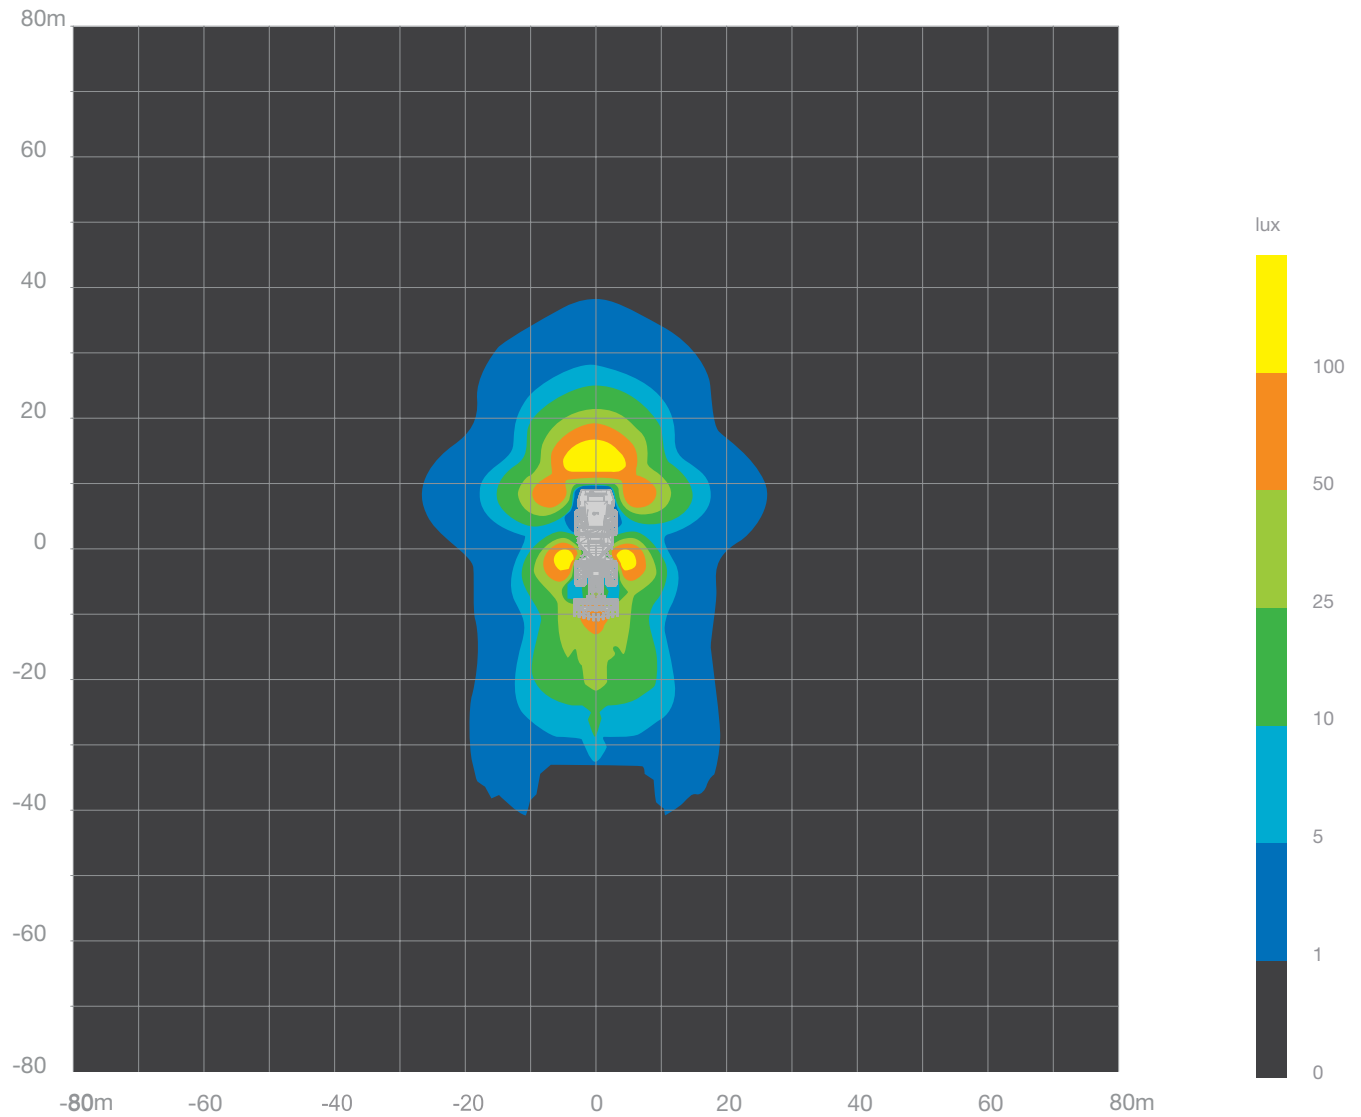

Light loss/maintenance factor: 0.85
Ambient temperature: 35°C


SIMULATION

KOMATSU WA1200 OPTION A

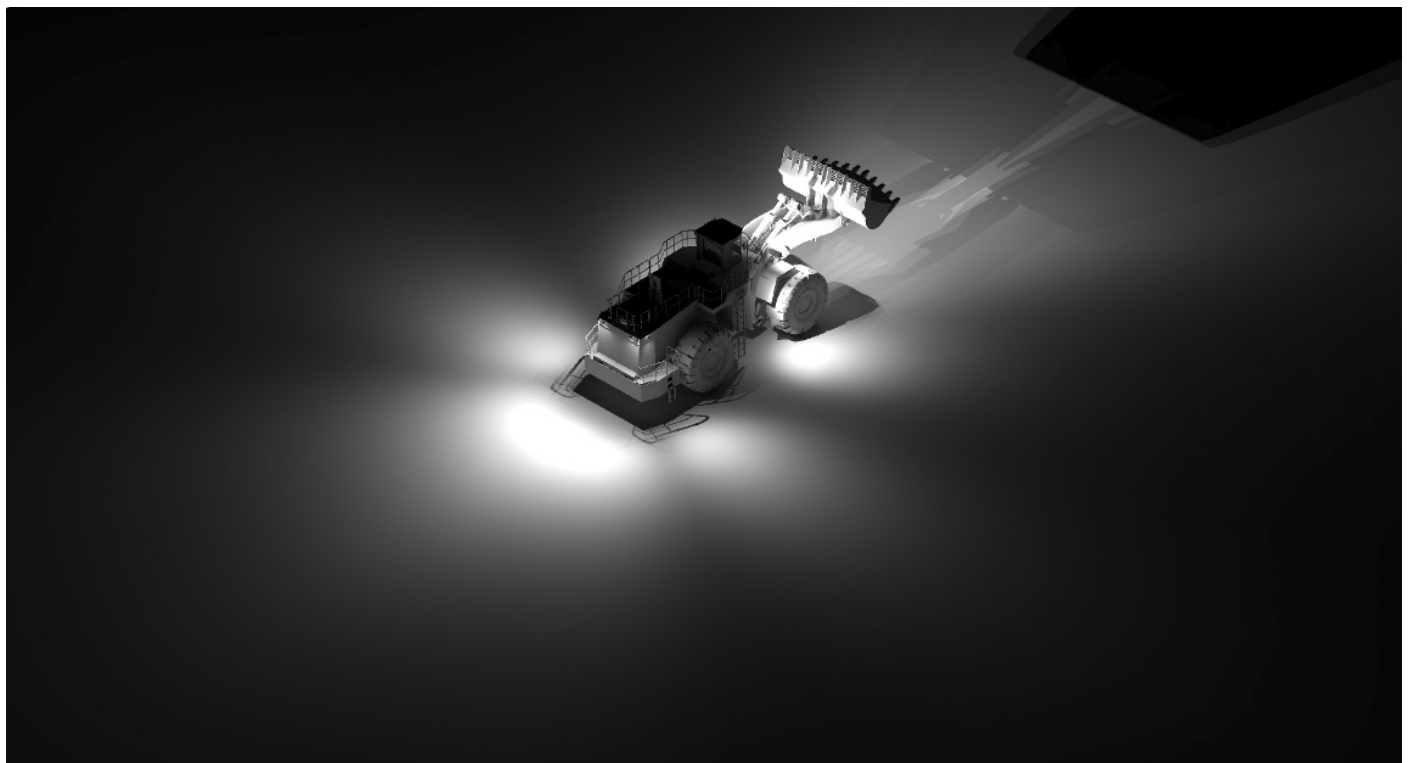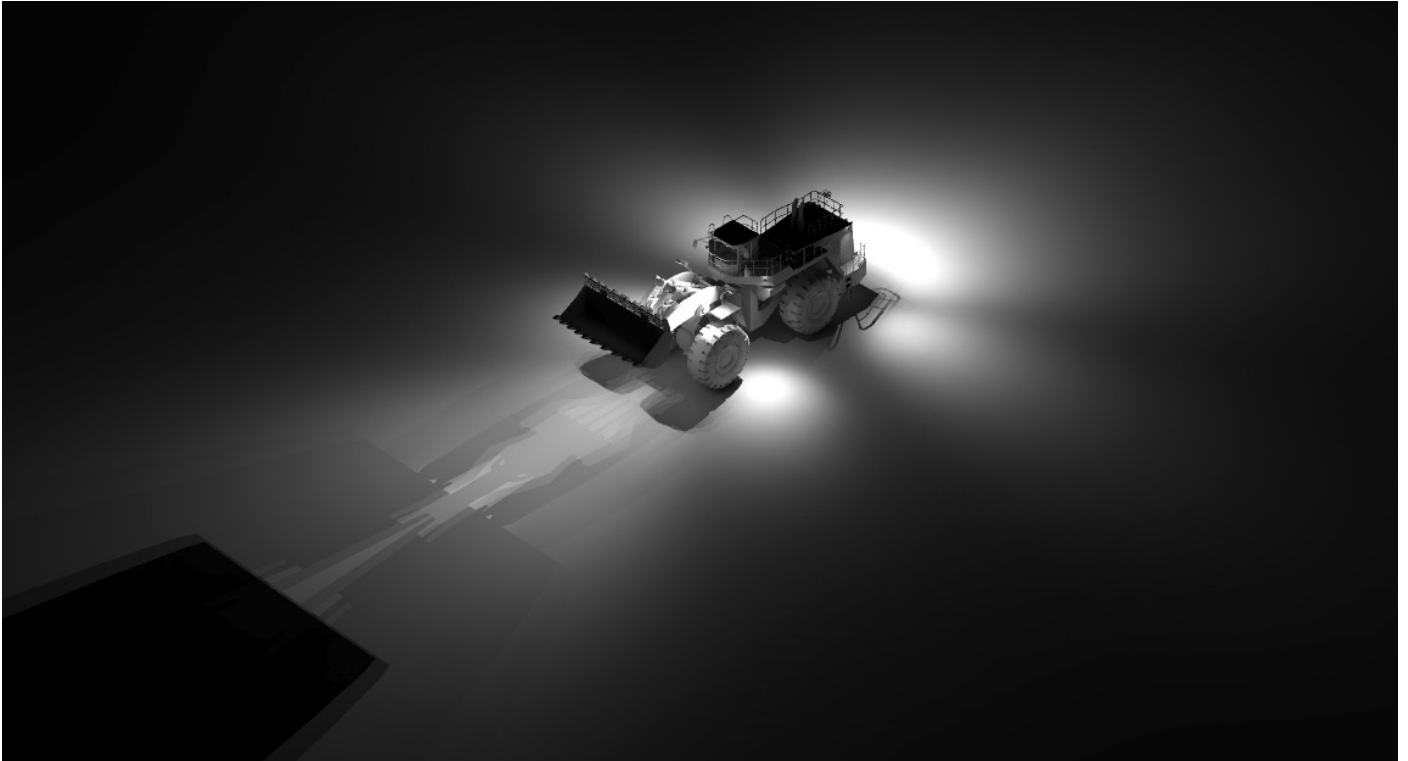

OPERATOR'S VIEW


KOMATSU WA1200
OPTION A

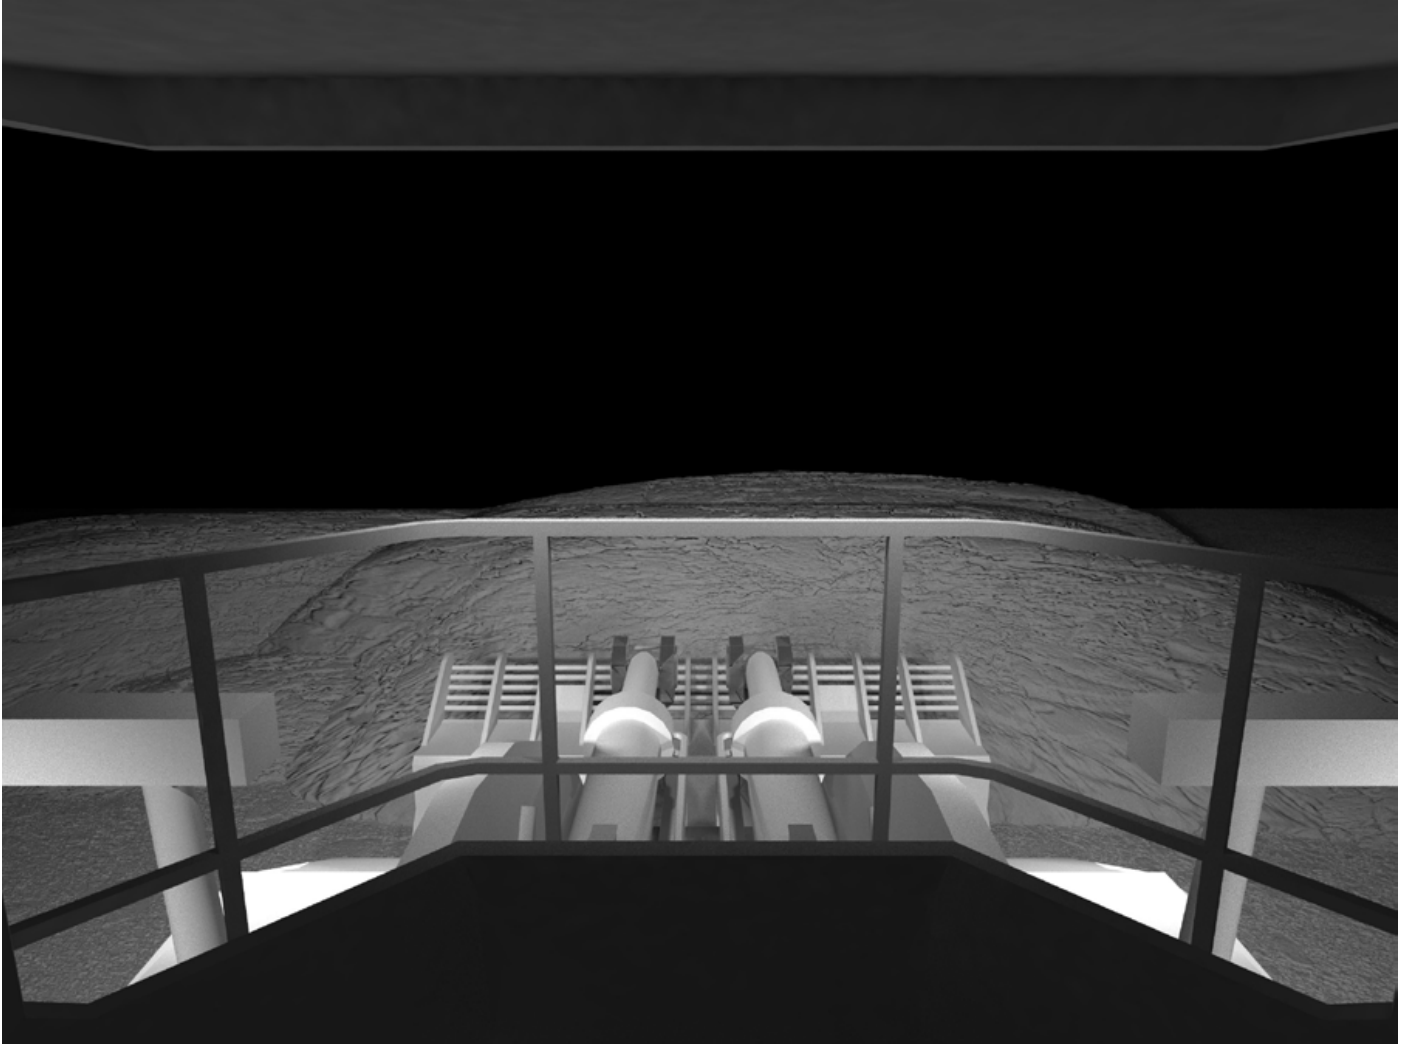

LUMINAIRE SCHEDULE


KOMATSU WA1200 OPTION B

Model No.	Luminaire	Optic Type	Quantity
CP12-NOP	CP12 Flood Light	No Optics	1
CP12-NARROW	CP12 Flood Light	NARROW Beam Angle	2
CP12-OVAL	CP12 Flood Light	OVAL Beam Angle	6
CP12-MEDIUM	CP12 Flood Light	MEDIUM Beam Angle	12

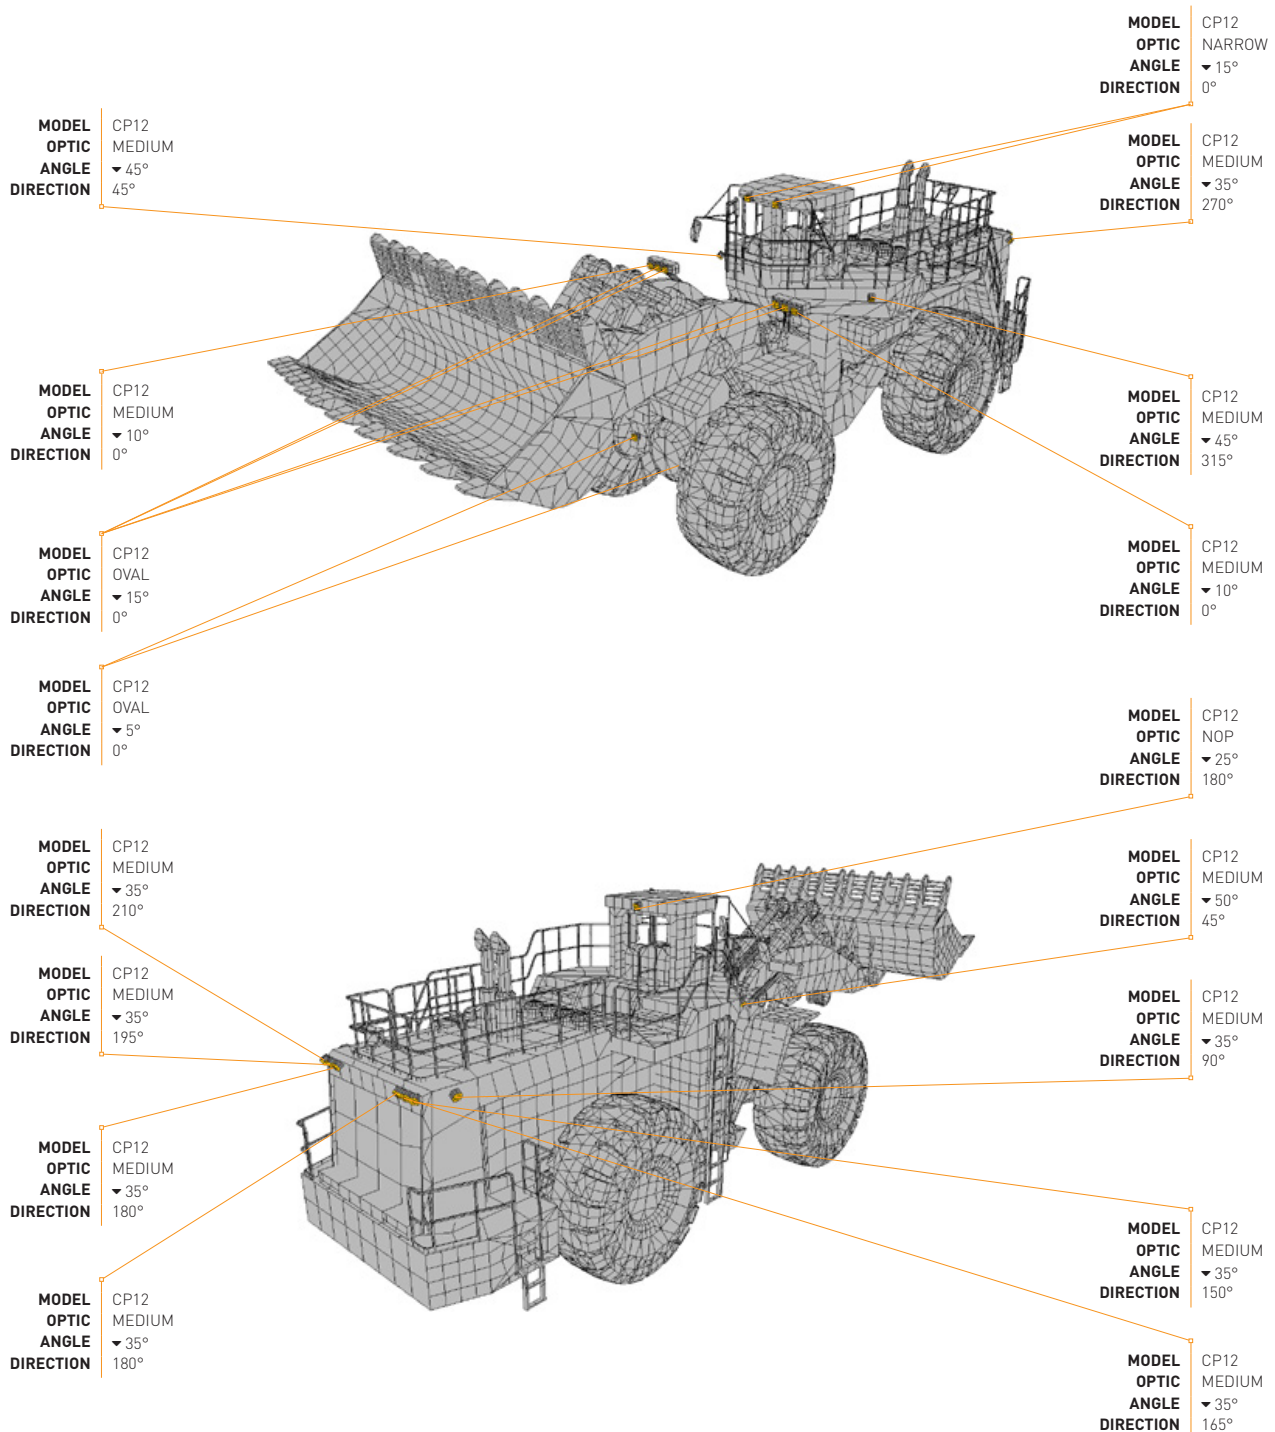

ISOLINE VIEW



KOMATSU WA1200
OPTION B

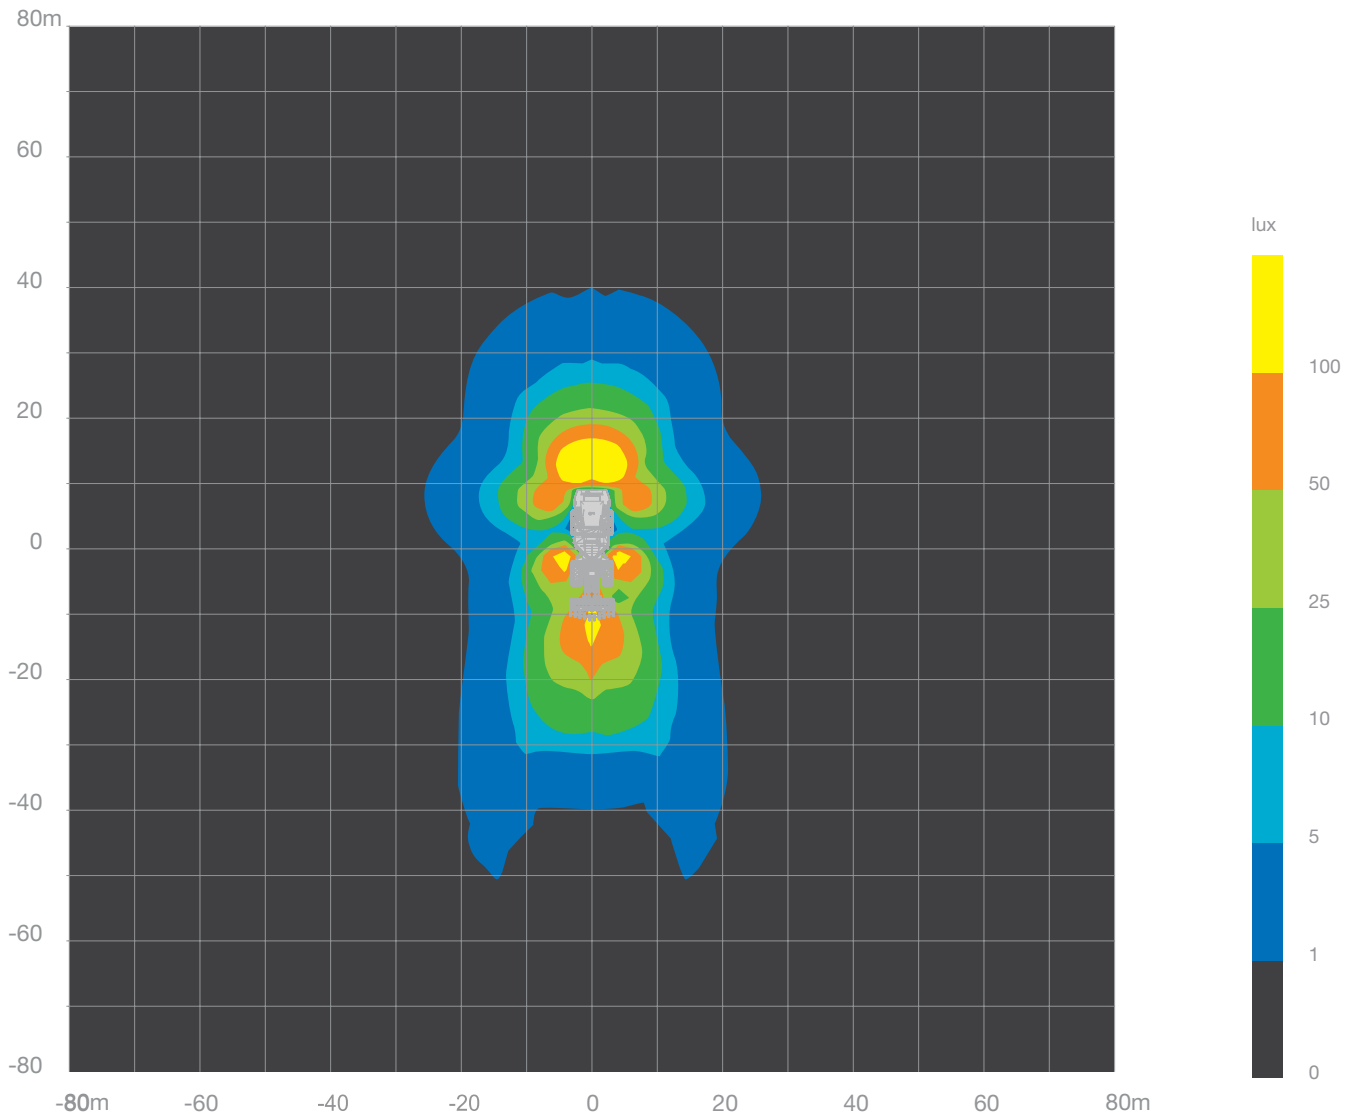

Light loss/maintenance factor: 0.85
Ambient temperature: 35°C

SIMULATION

KOMATSU WA1200 OPTION B

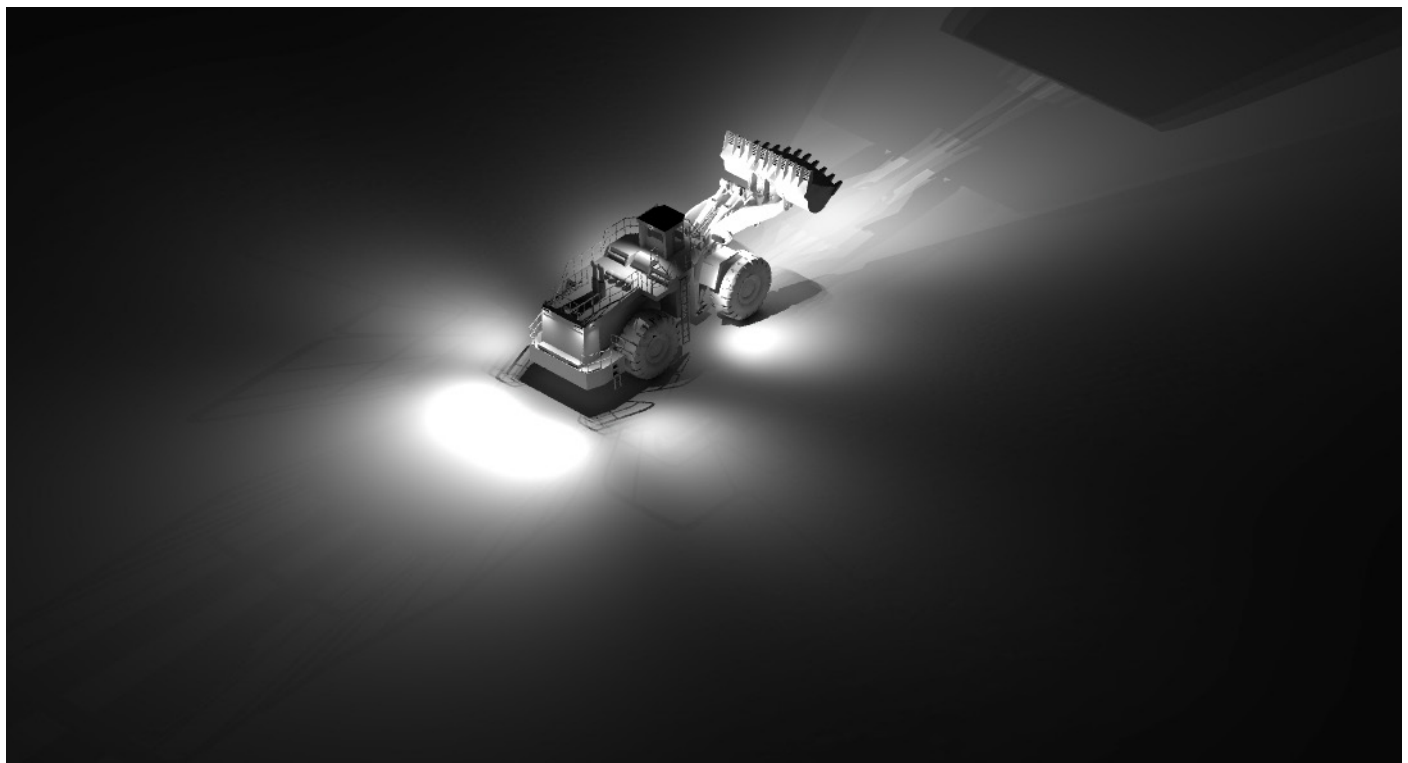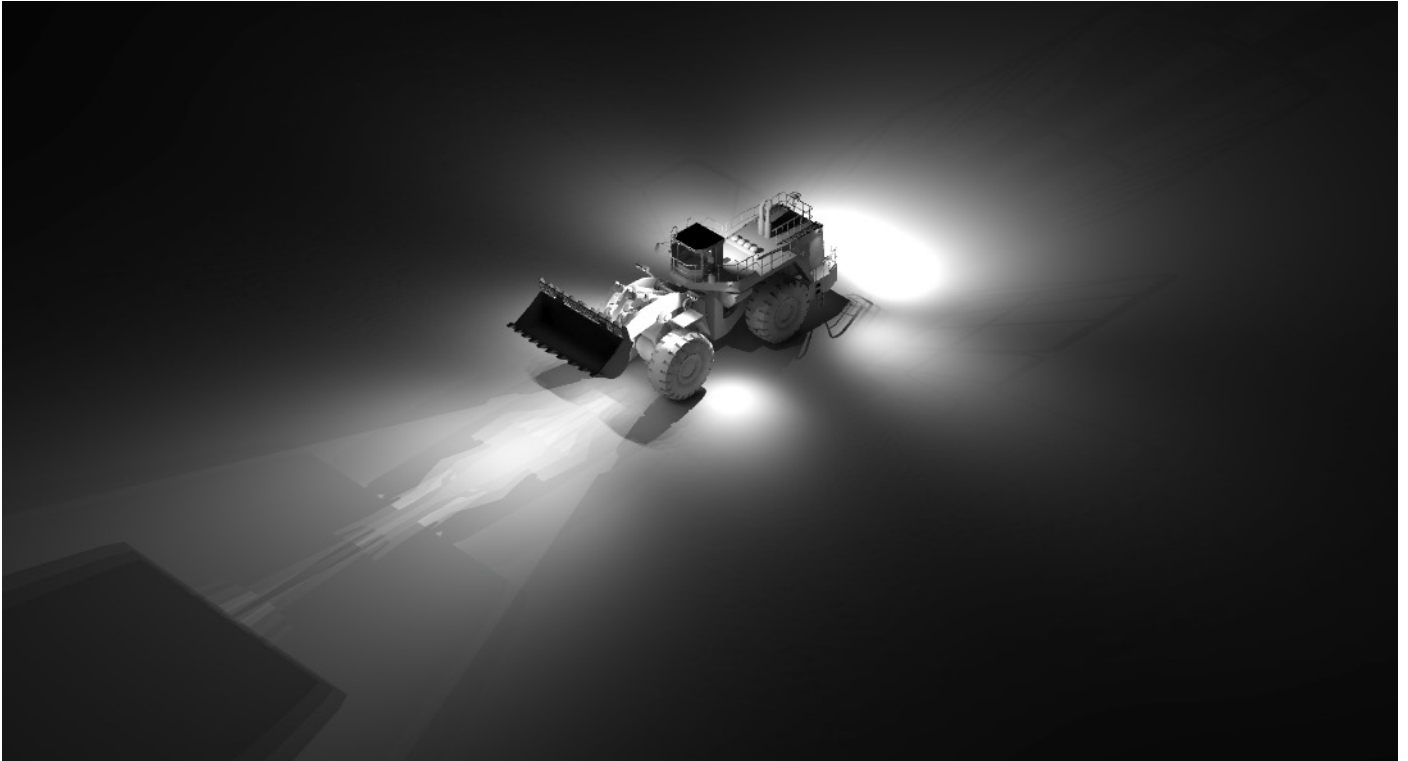

OPERATOR'S VIEW

KOMATSU WA1200
OPTION B

