


LIEBHERR R9250/R9350


Lighting Design Simulation Report




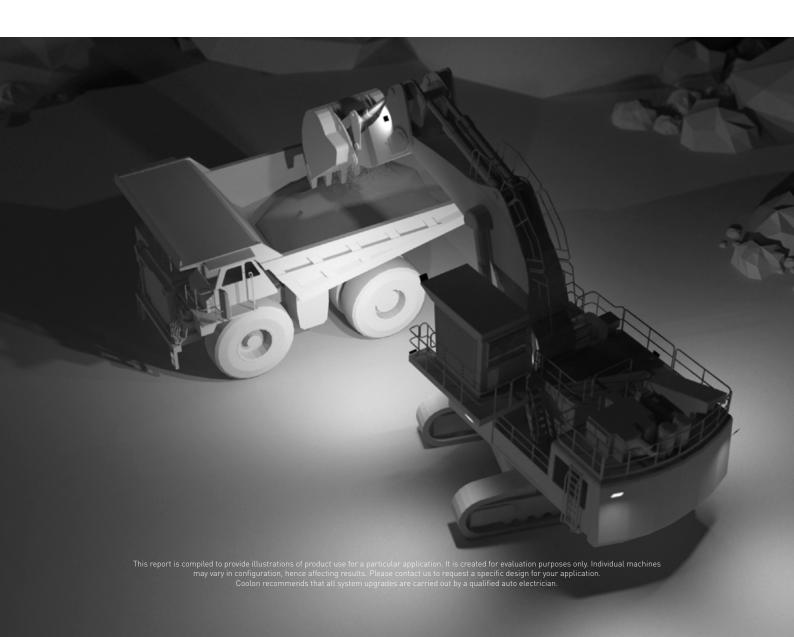

R9250 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-0VAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

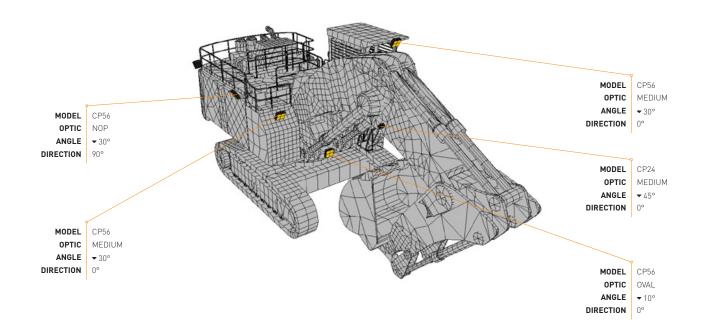


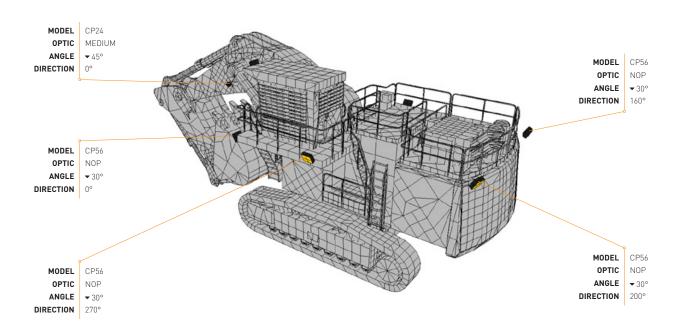



R9250 ISOLINE VIEW

Model No.	Luminaire	Optic Type	Quantity
CP56-0VAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	 5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

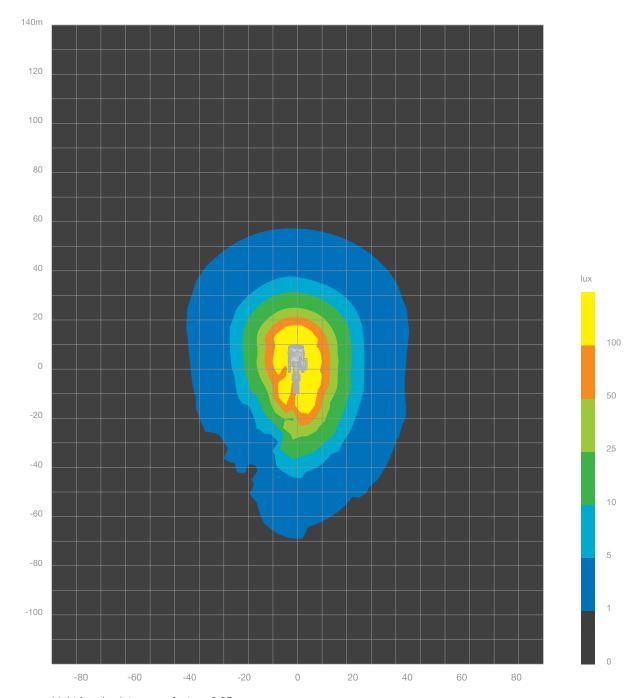

Light loss/maintenance factor: 0.85

Ambient temperature: 35°C



R9350 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-0VAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2









R9350 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-0VAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

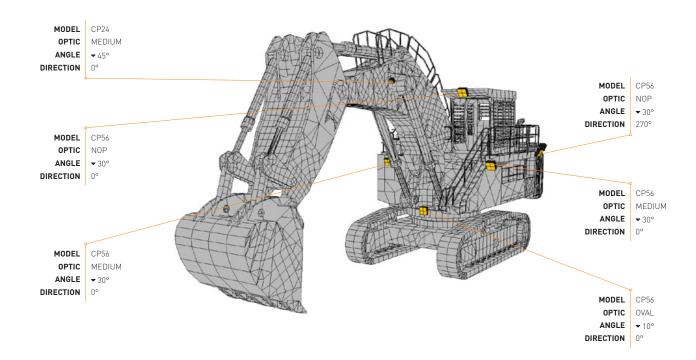


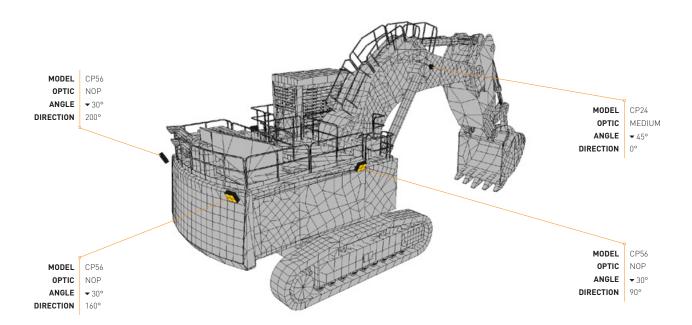



R9350 ISOLINE VIEW

Model No.	Luminaire	Optic Type	Quantity
CP56-OVAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	 5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2

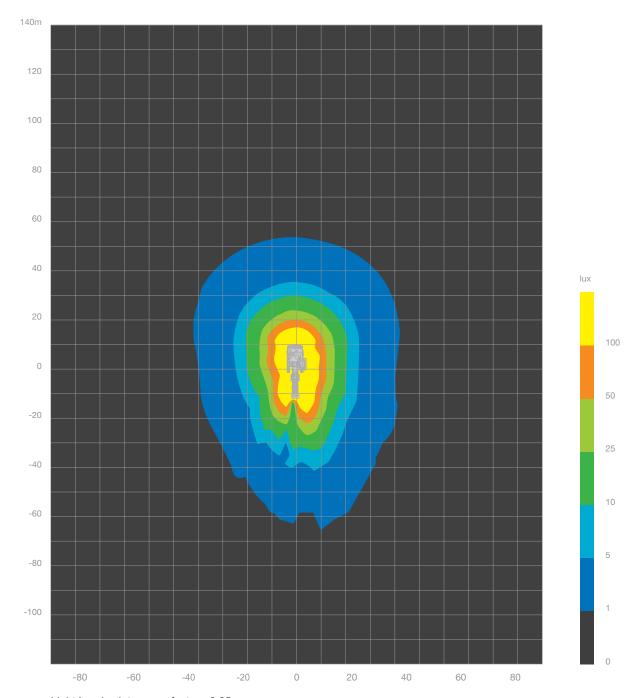

Light loss/maintenance factor: 0.85

Ambient temperature: 35°C



R9350 SUGGESTED LAYOUT

Model No.	Luminaire	Optic Type	Quantity
CP56-0VAL	CP56 Flood Light	OVAL Beam Angle	1
CP56-NOP	CP56 Flood Light	No Optics	5
CP56-MEDIUM	CP56 Flood Light	MEDIUM Beam Angle	2
CP24-MEDIUM	CP24 Flood Light	MEDIUM Beam Angle	2



