


Butch LED Floodlight 75W / 150W

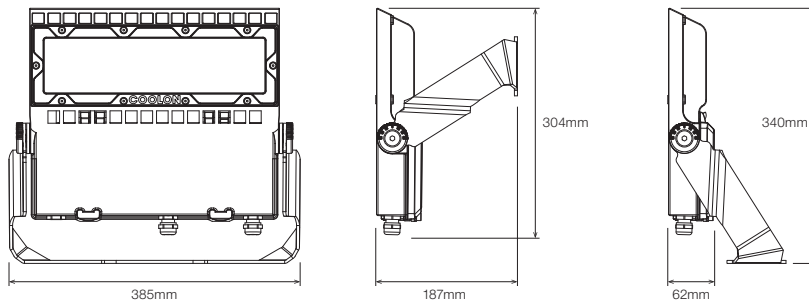

Electrical Characteristics


Voltage In
200 – 440VAC 50/60Hz

Power
85W / 160W

IP/IK Rating
IP66 / IK09

Operating Temperature
-20 to +50°C

Butch LED Floodlight 240W

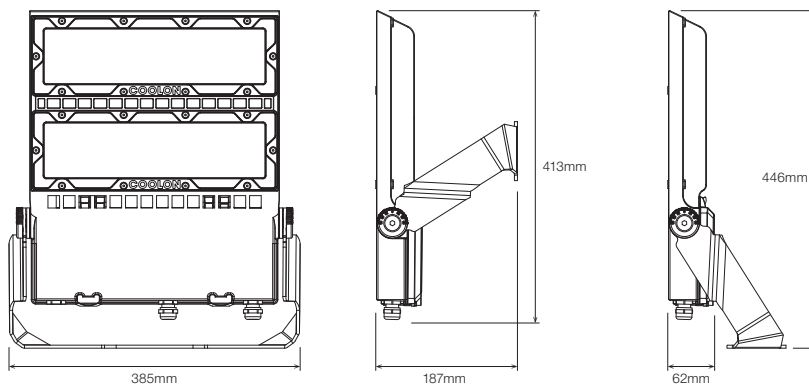

Electrical Characteristics


Voltage In
200 – 440VAC 50/60Hz

Power
250W

IP/IK Rating
IP66 / IK09

Operating Temperature
-20 to +50°C

Bracket Footprint

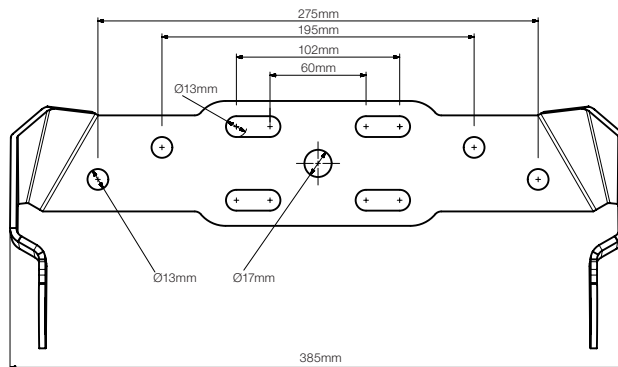

U-Bolt Pole Mounting Clamp Kit (Optional)

The U-Bolt Pole Mounting Clamp Kit is specifically designed for mounting products with a flat mounting surface on a variety of circular poles that are widely used in the industry.


For more information visit:

<http://www.coolon.com.au/mounting-acc-pdf>




WIRING DIAGRAM

- N** Neutral
- ⊥** Earth
- L** Line (Active)

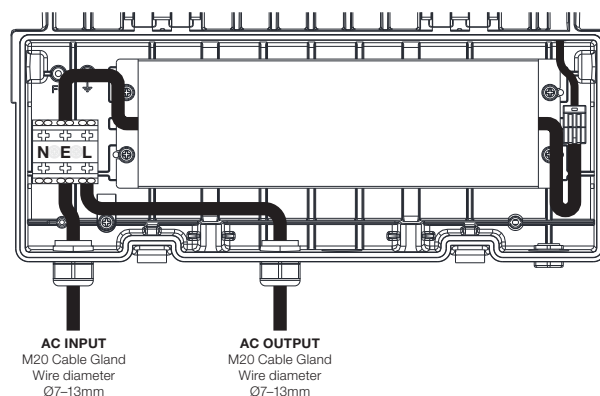



MOUNTING

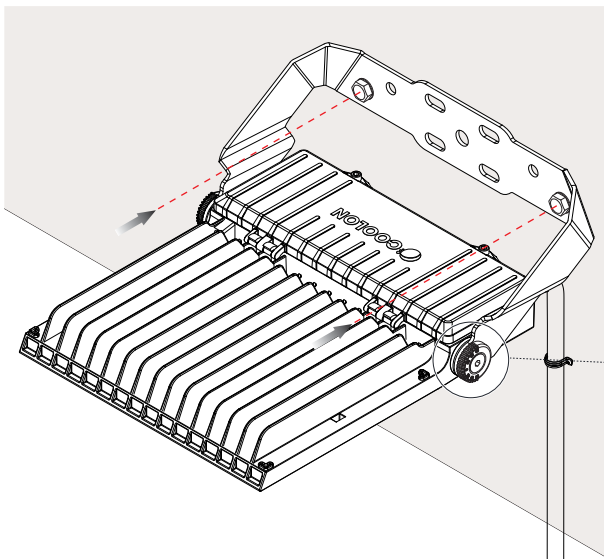

The mounting bracket allows for a flat surface and pole mounting. When mounting to a flat surface, secure using a minimum of 2x M10 bolts. When mounting to a pole use a U-Bolt Pole Mounting Clamp Kit.





NOTE: In order to adjust bracket angle the bracket armlock teeth must be separated completely from the housing.




Mounting to comply with Dark Sky (DS43)




When mounting to comply with Dark Sky (DS43) BLF-150-WWT-T4-MP or BLF-240-WWT-T4-MP ensure the luminaire is mounted horizontally

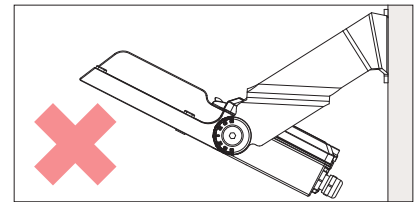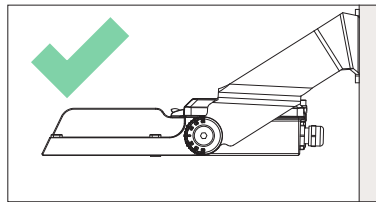

Butch LED Floodlight 75W / 150W

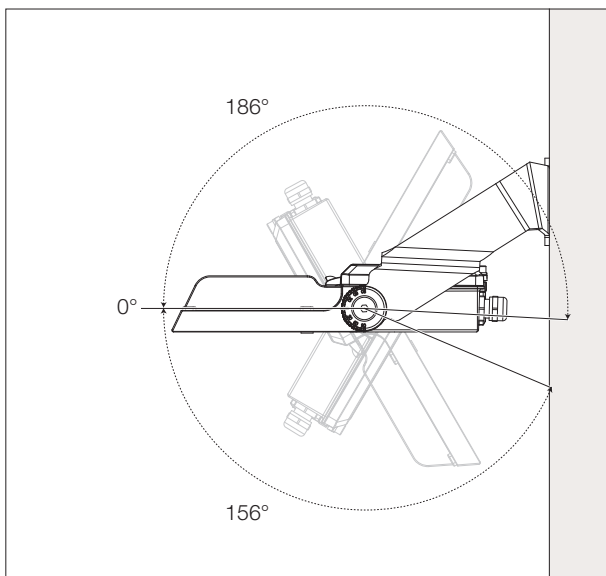

Butch LED Floodlight 240W

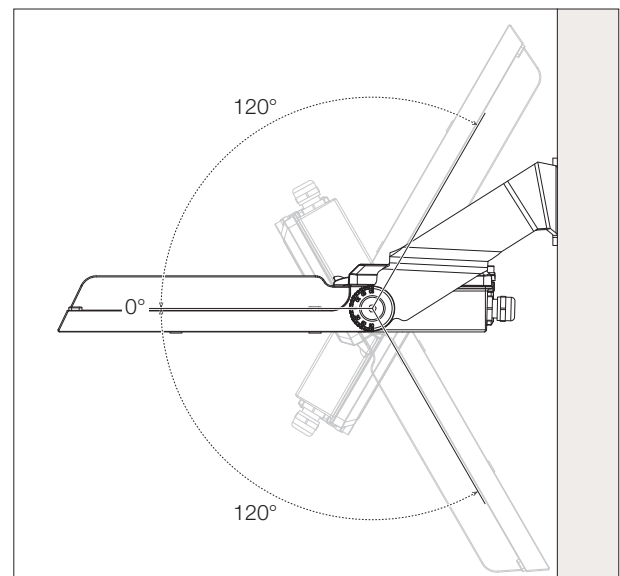

IMPORTANT

Primary use: flood light for commercial and industrial applications.

- Read through this manual before installation
- Handle the product with care
- The product must be grounded
- The product must be installed by a suitably qualified person
- Turn OFF the power before installation and maintenance
- Make sure the product is securely installed
- The housing might become hot after operation
- Keep optical face clean

