





Type:

VAYO

25W EMERGENCY BUNKER



VAYO 25W EMERGENCY BUNKER

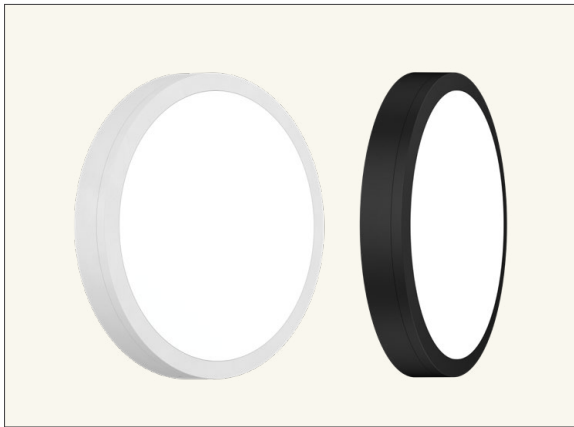

The VAYO bunker light is a versatile LED luminaire engineered to deliver dependable performance across a wide range of applications. Featuring high-efficiency SMD LEDs within a durable, lightweight fire-rated construction, VAYO provides consistent, high-quality illumination with excellent resistance to heat and corrosion. With selectable CCT, compatibility with sensor integration, and integrated emergency functionality, VAYO offers adaptable performance tailored to diverse environments. Designed for effortless installation and low-maintenance operation, it is an ideal solution for modern commercial and public spaces.

PRODUCT INFO

Model	VAYO
Range	Bunker LED
Mounting Method	Wall / Surface Mount
Battery	LiFeP04
Voltage	200-240VAC, 50Hz


PERFORMANCE SPECIFICATIONS

Power	25W
Lumens	2240 - 2550 lm
Beam Angle	110°
IP Rating	IP65
IK Rating	IK10
LEDs	SMD CRI80
Dimmable	No
Photometric Classification	CO D32 C90 D32
Testing	Auto Test (EM model only)
Emergency Power	3W Max (EM model only)
Working Temperature	0°C to 45°C

DESIGN SPECIFICATIONS

Weight	1.4kg
Construction	PC
Diffuser Material	PC
Housing Colour	White or Black Housing
Sensor	Microwave Sensor (Optional upgrade)

DIMENSIONS (MM)

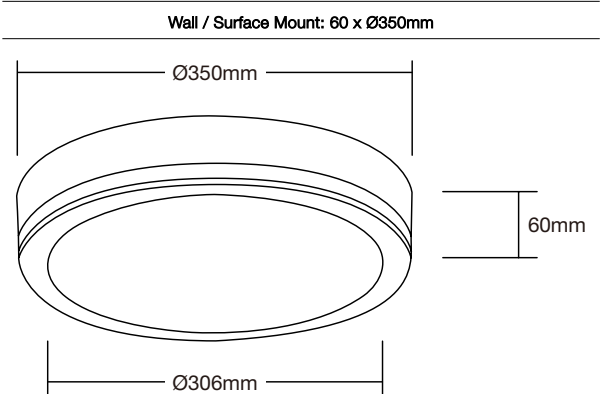

COMPLIANCE & WARRANTY

Certificates Approvals	AS2293- AS/NZS CISPR 15
Warranty	5 Year Warranty

ORDERING EXAMPLE

VAYO	EM	B2	14	25	WNC	NS	ND	A
MODEL	OPERATION	STANDBY POWER	BODY TYPE	POWER	COLOUR TEMPERATURE	SENSOR	DIMMING	VOLTAGE
VAYO	EM Emergency	B2 Standby battery for EM lighting	14 14" 350mm	25 25W	WNC Warm/Neutral/Cool White	NS No Sensor	ND No Dimming	A 220-240VAC, 50Hz
					WWT Warm White	MS Microwave Sensor (Optional upgrade)		
					NWT Neutral White			
					CWT Cool White			