

¹ NOTE: Recommended minimum distance from endcap (both sides)


² NOTE: Lanyard / chain not provided by Coolon

VOLTAGE IN	POWER	OPERATING TEMP.	IP RATING	IK RATING	
176 – 305VAC, 47 – 63Hz	75W	-20°C ≤ T _{amb} ≤ 50°C	IP66	IK09	 Class II insulated LED luminaire

INSTALLATION INSTRUCTIONS

Step 1

Slide in the rhomb nut into the channel through the opening (x4).

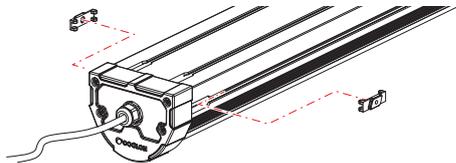

Step 2


Slide the rhomb nut to final position; approximately 100mm from the end cap.



INSTALLATION INSTRUCTIONS - SURFACE MOUNTED

Step 1

Mount stainless steel brackets to surface using suitable bolts.

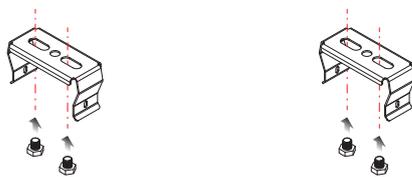

Step 2


Align the unit rhomb nut holes with the brackets. Secure with supplied screws. Tighten until the bracket is secured (x4).



INSTALLATION INSTRUCTIONS - SUSPENSION MOUNTED


Step 1

Pre-assemble the eyebolt as indicated in each bracket. Tighten the nut until the eyebolt does not rotate.



Step 2

Put on the bracket and align with the rhomb nut holes. Secure with supplied screws. Tighten until the bracket is secured (x4). Suspend as desired.

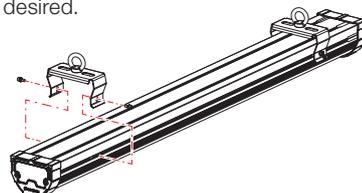

 Once the product has reached end of life, unit is to be disposed of in accordance to local e-waste laws or regulations. Do not dispose of these products as unsorted municipal waste: take them for recycling. For information on your nearest recycling point, check with your local waste authority.